

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P766302

Luminaire Tested: LD6D45BD010-EU6DR2540509024-6LBSQW1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P766302  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-4)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D45BD010-EU6DR2540509024-6LBSQW1B  
Description: 6 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 25° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2837.6 lumens  
Efficiency: N/A  
Efficacy: 73.3 lumens/watt  
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.45  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 38.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P766302  
CATALOG NUMBER: LD6D45BD010-EU6DR2540509024-6LBSQW1B

### Luminous Intensity Polar Plot

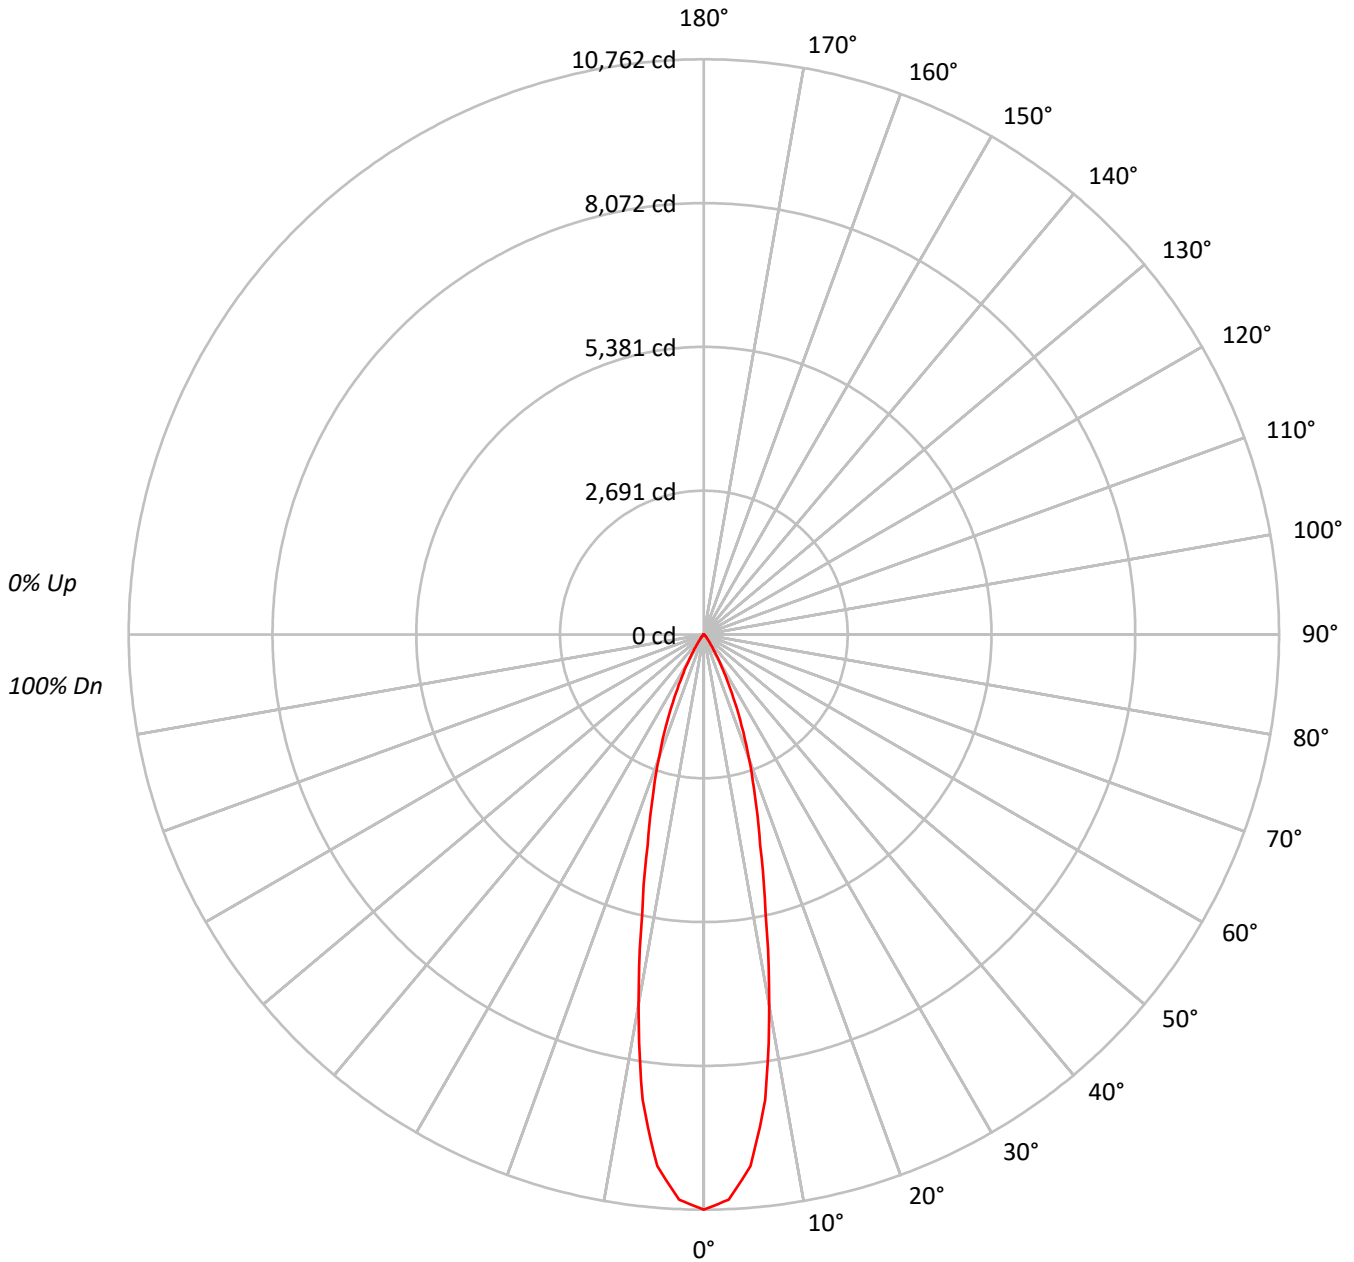



TEST NUMBER: P766302

CATALOG NUMBER: LD6D45BD010-EU6DR2540509024-6LBSQW1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96						96													
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92						92													
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89						89													
4	103	97	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85						85													
5	100	93	89	86	98	93	89	86	91	87	85	89	86	84	88	85	83	82						82													
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79						79													
7	93	87	82	79	92	86	82	79	85	81	78	84	80	78	83	80	78	77						77													
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74						74													
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72						72													
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69						69													

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1175908
5°	1095213
10°	781250
15°	460129
20°	286299
25°	157121
30°	71850
35°	27210
40°	12323
45°	7417
50°	3077
55°	1981
60°	1377
65°	931
70°	160
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 7417 cd/sqm



TEST NUMBER: P766302

CATALOG NUMBER: LD6D45BD010-EU6DR2540509024-6LBSQW1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	858.2	30.2
10°-20°	1162.4	41.0
20°-30°	615.1	21.7
30°-40°	151.8	5.4
40°-50°	37.1	1.3
50°-60°	9.7	0.3
60°-70°	3.3	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2635.7	92.9
0°-40°	2787.5	98.2
0°-60°	2834.3	99.9
0°-90°	2837.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2837.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	10762	
5°	9986	858
15°	4068	1162
25°	1303	615
35°	204	152
45°	48	37
55°	10	10
65°	4	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P766302

CATALOG NUMBER: LD6D45BD010-EU6DR2540509024-6LBSQW1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	10762.4
2.5°	10585.6
5°	9985.7
7.5°	8780.6
10°	7041.7
12.5°	5323.1
15°	4067.8
17.5°	3170.2
20°	2462.3
22.5°	1846.6
25°	1303.3
27.5°	874.0
30°	569.5
32.5°	346.5
35°	204.0
37.5°	124.9
40°	86.4
42.5°	66.0
45°	48.0
47.5°	29.0
50°	18.1
52.5°	13.1
55°	10.4
57.5°	8.1
60°	6.3
62.5°	5.0
65°	3.6
67.5°	1.4
70°	0.5
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)