

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P772012

Luminaire Tested: LD6D80BD010-EU6DR4070959030-6LBCSSQMMS

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P772012
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D80BD010-EU6DR4070959030-6LBCSSQMMMS
Description: 6 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 40° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9513.2 lumens
Efficiency: N/A
Efficacy: 120.6 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 78.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P772012
CATALOG NUMBER: LD6D80BD010-EU6DR4070959030-6LBCSSQMMS

Luminous Intensity Polar Plot

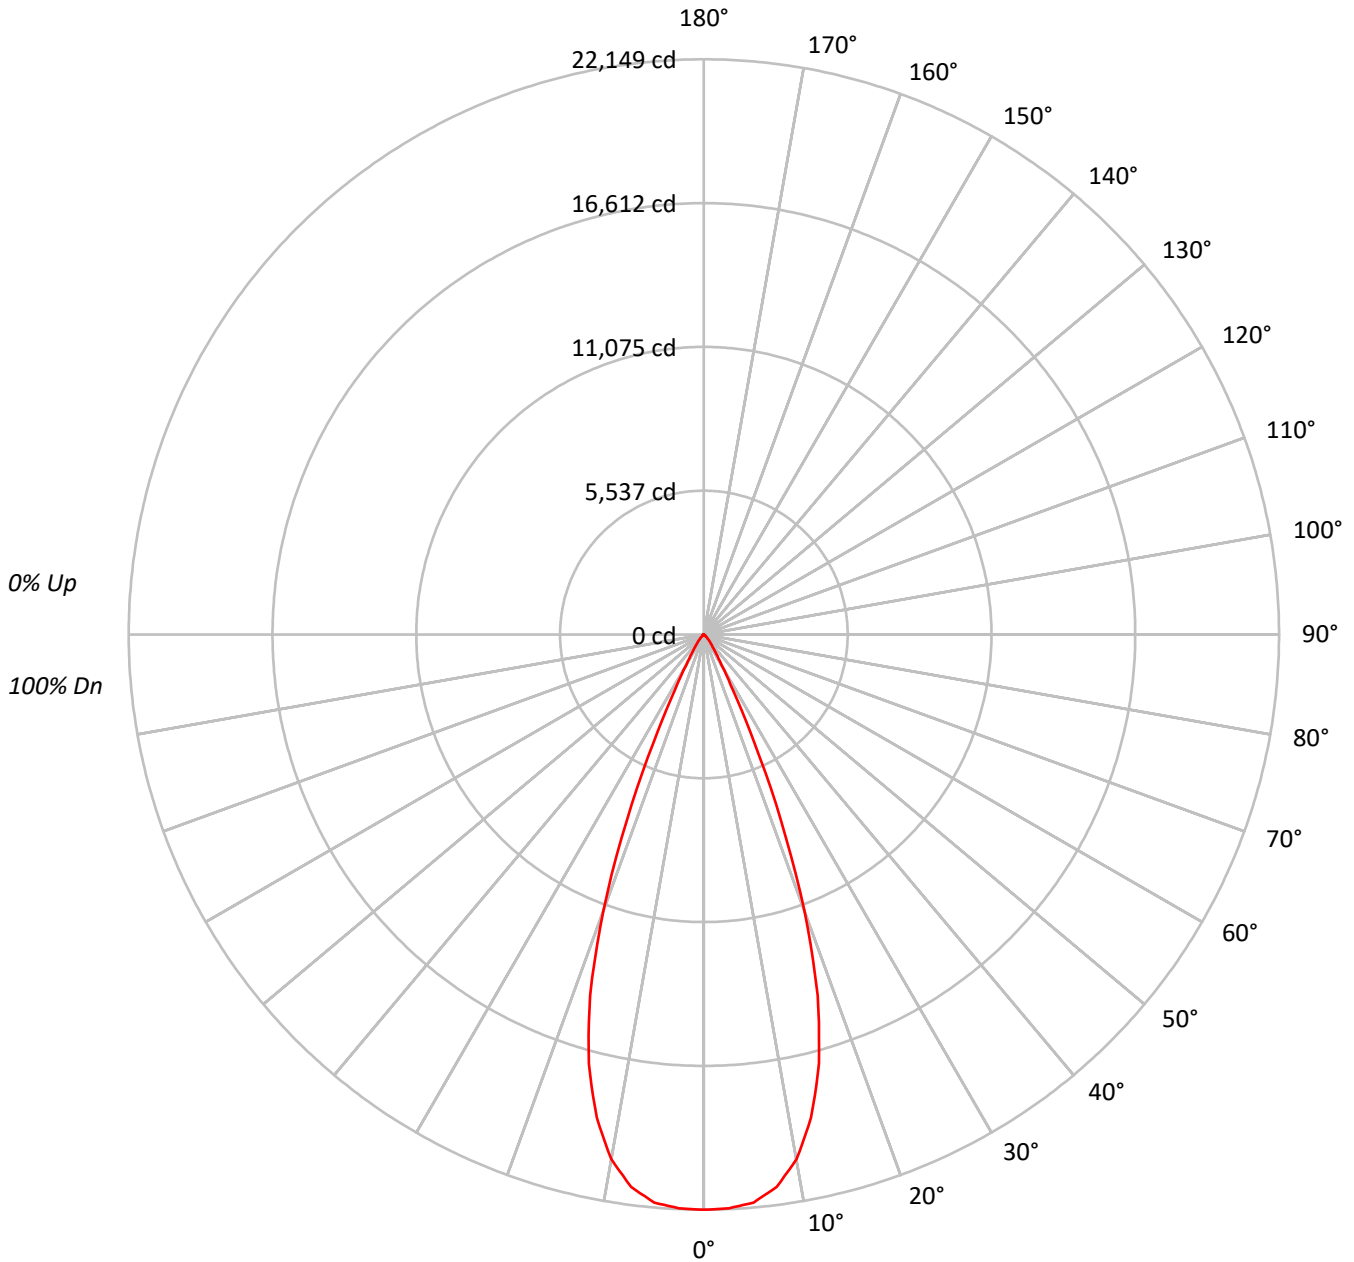



TEST NUMBER: P772012

CATALOG NUMBER: LD6D80BD010-EU6DR4070959030-6LBCSSQMMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	97	96				96															
2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92				92															
3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88				88															
4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84				84															
5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81				81															
6	95	88	84	80	94	88	83	80	86	82	80	85	82	79	84	81	79	77				77															
7	92	85	80	77	91	84	80	77	83	79	76	82	79	76	81	78	76	74				74															
8	89	82	77	74	88	81	77	74	80	76	73	79	76	73	78	75	73	72				72															
9	86	79	74	71	85	78	74	71	77	73	71	76	73	70	76	72	70	69				69															
10	83	76	71	68	82	75	71	68	75	71	68	74	70	68	73	70	68	67				67															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2420038
5°	2408279
10°	2276340
15°	1935184
20°	1318965
25°	550326
30°	173033
35°	80430
40°	44472
45°	20396
50°	9893
55°	5429
60°	2819
65°	1008
70°	415
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 20396 cd/sqm



TEST NUMBER: P772012

CATALOG NUMBER: LD6D80BD010-EU6DR4070959030-6LBCSSQMMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2050.3	21.6
10°-20°	4593.2	48.3
20°-30°	2299.2	24.2
30°-40°	421.5	4.4
40°-50°	116.3	1.2
50°-60°	27.3	0.3
60°-70°	5.2	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	8942.7	94.0
0°-40°	9364.2	98.4
0°-60°	9507.8	99.9
0°-90°	9513.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9513.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	22149	
5°	21958	###
15°	17108	4593
25°	4565	2299
35°	603	421
45°	132	116
55°	28	27
65°	4	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P772012

CATALOG NUMBER: LD6D80BD010-EU6DR4070959030-6LBCSSQMMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	22149.2
2.5°	22116.8
5°	21957.7
7.5°	21450.4
10°	20517.5
12.5°	19063.2
15°	17108.1
17.5°	14565.6
20°	11343.7
22.5°	7733.7
25°	4564.9
27.5°	2413.1
30°	1371.5
32.5°	886.3
35°	603.0
37.5°	430.9
40°	311.8
42.5°	213.5
45°	132.0
47.5°	84.1
50°	58.2
52.5°	41.4
55°	28.5
57.5°	18.1
60°	12.9
62.5°	7.8
65°	3.9
67.5°	2.6
70°	1.3
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)