

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P774545

Luminaire Tested: LD6D95BD010-EU6DR5070959040-6LBSQW1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P774545
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D95BD010-EU6DR5070959040-6LBSQW1MW
Description: 6 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11351.4 lumens
Efficiency: N/A
Efficacy: 114.4 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 99.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P774545
CATALOG NUMBER: LD6D95BD010-EU6DR5070959040-6LBSQW1MW

Luminous Intensity Polar Plot

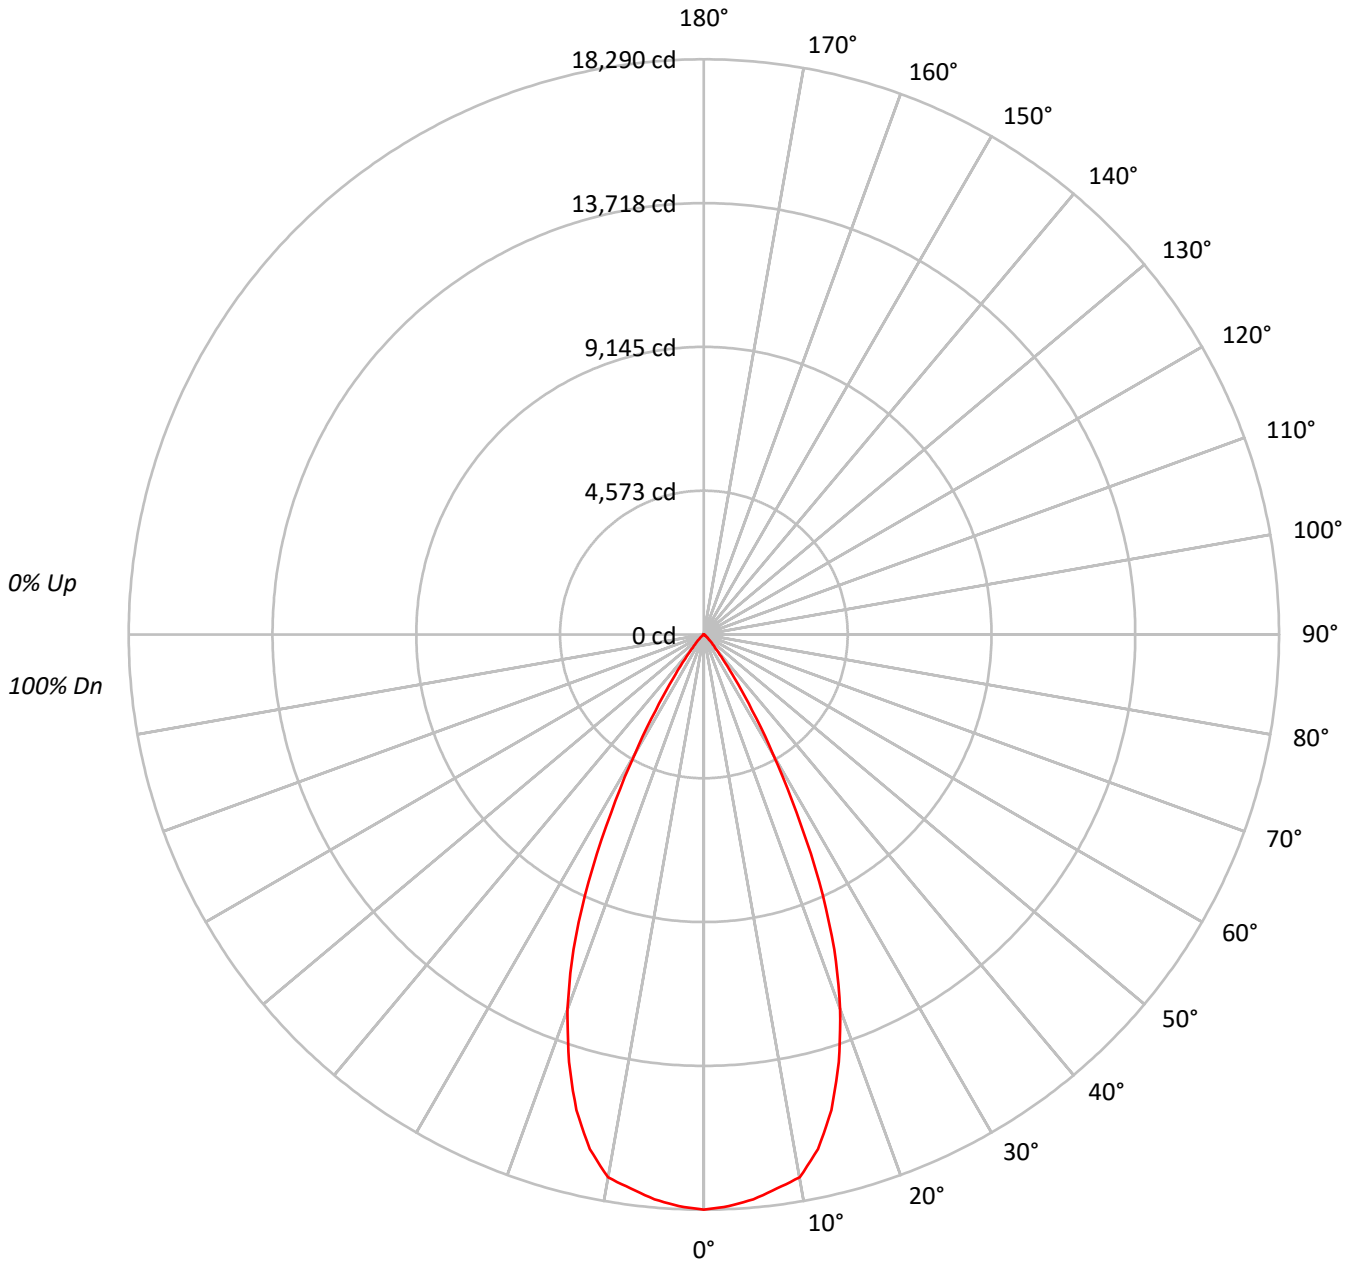



TEST NUMBER: P774545

CATALOG NUMBER: LD6D95BD010-EU6DR5070959040-6LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	114	112	109	107	112	110	108	106	106	104	102	102	101	99	98	97	97	95						95													
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90						90													
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85						85													
4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80						80													
5	96	89	84	80	95	88	83	79	86	82	79	85	81	78	83	80	77	76						76													
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	74	72						72													
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69						69													
8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65						65													
9	81	73	68	64	80	72	67	64	71	67	64	71	67	64	70	66	63	62						62													
10	78	70	64	61	77	69	64	61	68	64	61	68	64	61	67	63	60	59						59													

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1998379
5°	1977431
10°	1944866
15°	1770952
20°	1473631
25°	1046064
30°	553681
35°	225630
40°	83795
45°	38367
50°	15723
55°	8229
60°	4043
65°	1189
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 38367 cd/sqm



TEST NUMBER: P774545

CATALOG NUMBER: LD6D95BD010-EU6DR5070959040-6LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1704.1	15.0
10°-20°	4306.7	37.9
20°-30°	3868.6	34.1
30°-40°	1211.2	10.7
40°-50°	212.1	1.9
50°-60°	42.3	0.4
60°-70°	6.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	9879.5	87.0
0°-40°	11090.7	97.7
0°-60°	11345.0	99.9
0°-90°	11351.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	11351.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	18290	
5°	18029	###
15°	15656	4307
25°	8677	3869
35°	1692	1211
45°	248	212
55°	43	42
65°	5	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P774545

CATALOG NUMBER: LD6D95BD010-EU6DR5070959040-6LBSQW1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	18290.0
2.5°	18199.0
5°	18029.4
7.5°	17770.4
10°	17529.8
12.5°	16758.8
15°	15656.2
17.5°	14256.1
20°	12673.9
22.5°	10843.6
25°	8677.0
27.5°	6379.4
30°	4388.6
32.5°	2857.4
35°	1691.6
37.5°	971.5
40°	587.5
42.5°	382.4
45°	248.3
47.5°	151.1
50°	92.5
52.5°	63.2
55°	43.2
57.5°	29.3
60°	18.5
62.5°	10.8
65°	4.6
67.5°	1.5
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)