

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205436

Luminaire Tested: **LD6B50D010TE EU6B30508050 6LBSLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205436
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6B50D010TE EU6B30508050 6LBSLI1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH SPECULAR CLEAR TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5965.7 lumens
Efficiency: N/A
Efficacy: 101.5 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 1.04
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 58.77
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205436

CATALOG NUMBER: LD6B50D010TE EU6B30508050 6LBSLI1

Luminous Intensity Polar Plot

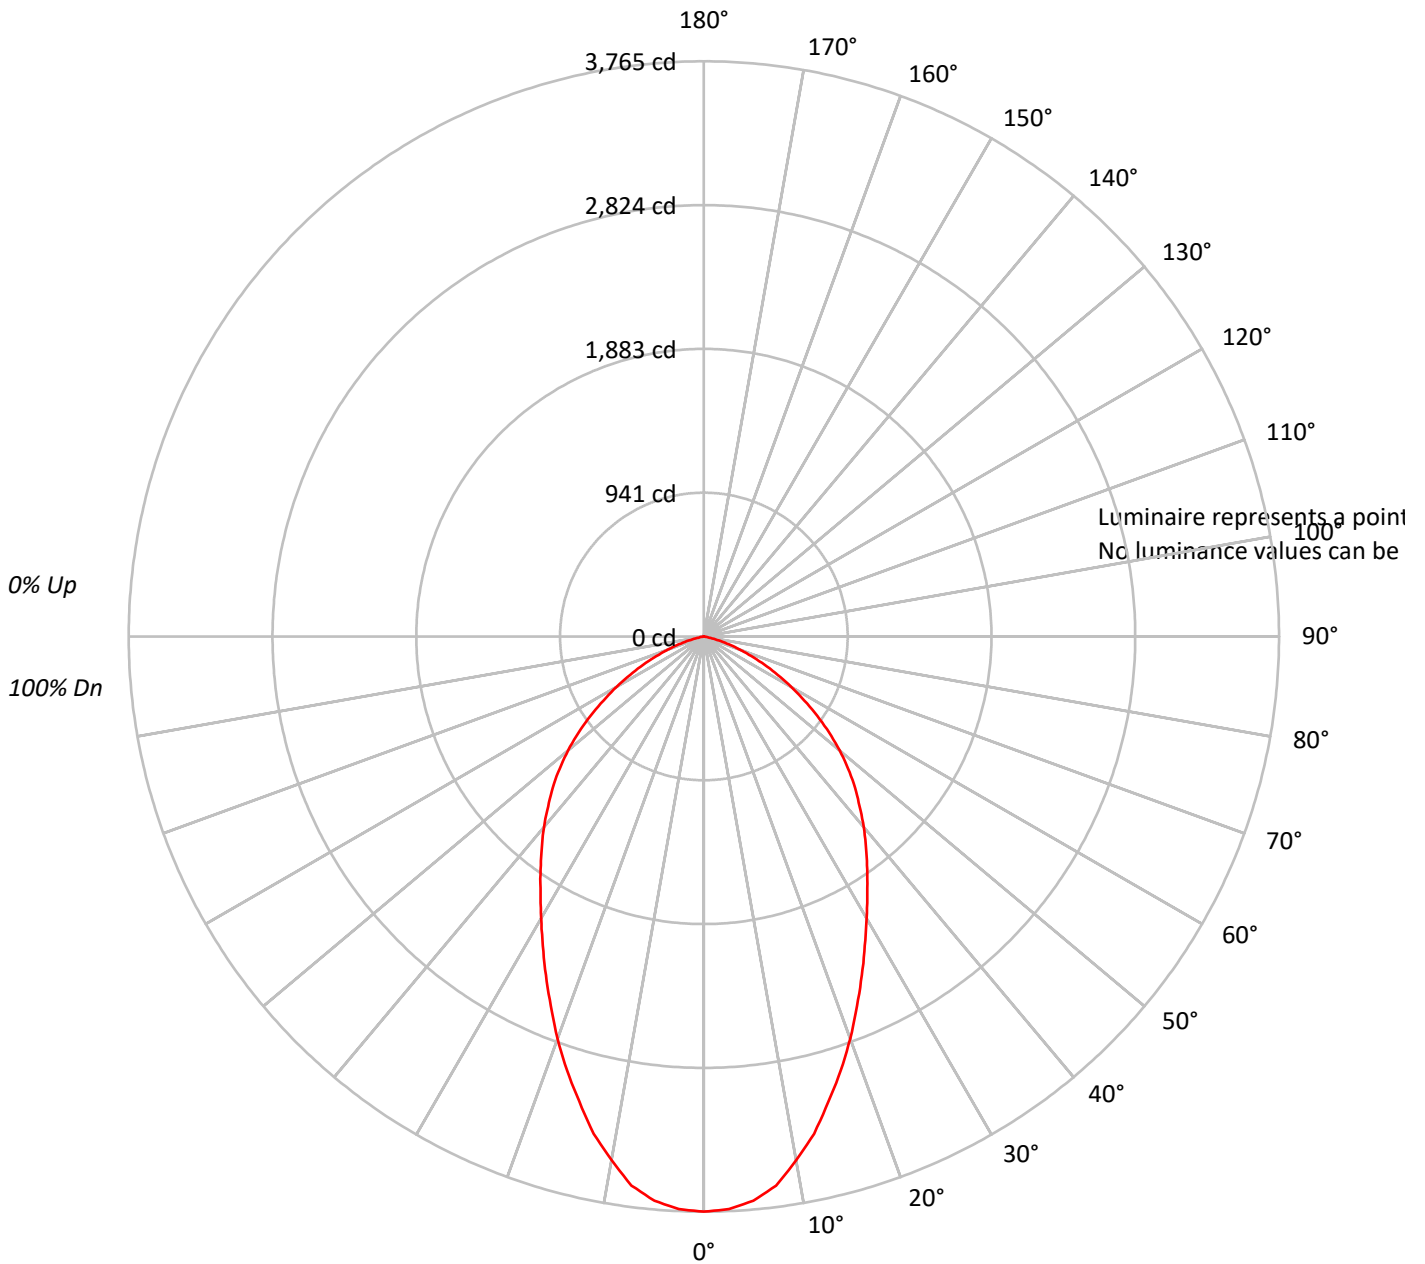



TEST NUMBER: P205436

CATALOG NUMBER: LD6B50D010TE EU6B30508050 6LBSLI1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89			
2	103	96	91	86	100	94	89	85	91	87	83	88	84	81	85	82	79	77			
3	95	86	79	74	93	85	78	73	82	76	72	79	75	71	77	73	70	68			
4	88	78	70	64	86	77	69	64	74	68	63	72	67	62	70	65	62	60			
5	82	71	63	57	80	70	62	57	67	61	56	66	60	55	64	59	55	53			
6	76	64	56	51	74	63	56	51	62	55	50	60	54	50	59	53	49	47			
7	71	59	51	46	70	58	51	45	57	50	45	55	49	45	54	49	45	43			
8	67	54	47	41	65	54	46	41	52	46	41	51	45	41	50	45	41	39			
9	63	50	43	38	61	50	43	38	49	42	38	48	42	37	47	41	37	36			
10	59	47	40	35	58	46	39	35	45	39	35	45	39	34	44	38	34	33			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205436

CATALOG NUMBER: LD6B50D010TE EU6B30508050 6LBSLI1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	346.9	5.8
10°-20°	883.1	14.8
20°-30°	1126.2	18.9
30°-40°	1167.9	19.6
40°-50°	1076.1	18.0
50°-60°	809.5	13.6
60°-70°	436.9	7.3
70°-80°	117.2	2.0
80°-90°	1.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2356.2	39.5
0°-40°	3524.1	59.1
0°-60°	5409.8	90.7
0°-90°	5965.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5965.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3765	
5°	3708	347
15°	3150	883
25°	2446	1126
35°	1863	1168
45°	1401	1076
55°	906	809
65°	437	437
75°	101	117
85°	0	2
90°	0	



TEST NUMBER: P205436

CATALOG NUMBER: LD6B50D010TE EU6B30508050 6LBSLI1

CANDELA DISTRIBUTION (FULL):

	0°
0°	3764.6
2.5°	3751.9
5°	3707.6
7.5°	3625.2
10°	3479.4
12.5°	3333.7
15°	3149.9
17.5°	2978.7
20°	2801.3
22.5°	2617.5
25°	2446.4
27.5°	2281.6
30°	2129.5
32.5°	1990.1
35°	1863.3
37.5°	1742.9
40°	1628.8
42.5°	1508.4
45°	1400.6
47.5°	1280.2
50°	1159.8
52.5°	1033.1
55°	906.3
57.5°	779.5
60°	659.1
62.5°	545.0
65°	437.3
67.5°	335.9
70°	247.2
72.5°	171.1
75°	101.4
77.5°	44.4
80°	12.7
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)