

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P684808

Luminaire Tested: **LX6C120D010 EX61209040 6LBSLI**

Issue Date: 2/15/2022



Test Information

Test Method: LM-79-08
Report Number: P684808
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205419)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C120D010 EX61209040 6LBSLI
Description: 6 INCH 12000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 4000K, 90CRI LEDS
AND 6LBS TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13567.0 lumens
Efficiency: N/A
Efficacy: 95.3 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 1.04
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 142.3
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P684808

CATALOG NUMBER: LX6C120D010 EX61209040 6LBSLI

Luminous Intensity Polar Plot

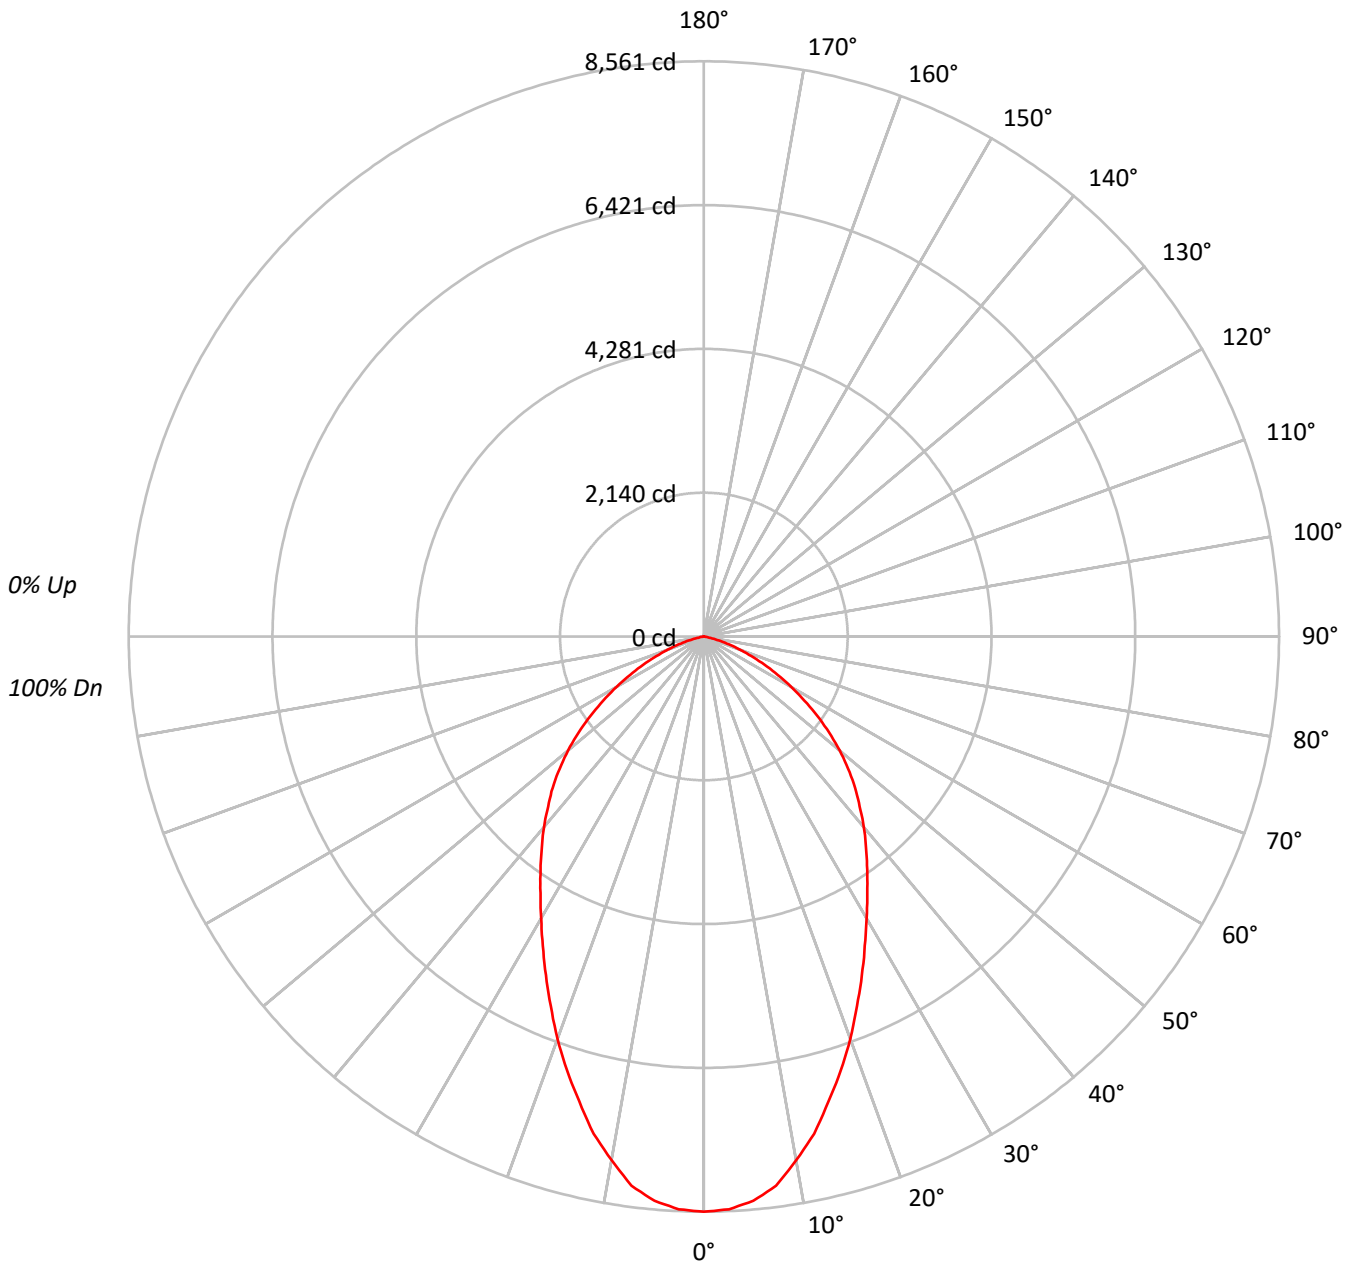



TEST NUMBER: P684808

CATALOG NUMBER: LX6C120D010 EX61209040 6LBSLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89			
2	103	96	91	86	100	94	89	85	91	87	83	88	84	81	85	82	79	77			
3	95	86	79	74	93	85	78	73	82	76	72	79	75	71	77	73	70	68			
4	88	78	70	64	86	77	69	64	74	68	63	72	67	62	70	65	62	60			
5	82	71	63	57	80	70	62	57	67	61	56	66	60	55	64	59	55	53			
6	76	64	56	51	74	63	56	51	62	55	50	60	54	50	59	53	49	47			
7	71	59	51	46	70	58	51	45	57	50	45	55	49	45	54	49	45	43			
8	67	54	47	41	65	54	46	41	52	46	41	51	45	41	50	45	41	39			
9	63	50	43	38	61	50	43	38	49	42	38	48	42	37	47	41	37	36			
10	59	47	40	35	58	46	39	35	45	39	35	45	39	34	44	38	34	33			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	469337
5°	463993
10°	440467
15°	406546
20°	371656
25°	336527
30°	306553
35°	283593
40°	265075
45°	246940
50°	224948
55°	196982
60°	164340
65°	128989
70°	90095
75°	48822
80°	9155
85°	0



TEST NUMBER: P684808

CATALOG NUMBER: LX6C120D010 EX61209040 6LBSLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	788.9	5.8
10°-20°	2008.4	14.8
20°-30°	2561.2	18.9
30°-40°	2656.0	19.6
40°-50°	2447.3	18.0
50°-60°	1840.9	13.6
60°-70°	993.7	7.3
70°-80°	266.6	2.0
80°-90°	3.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5358.5	39.5
0°-40°	8014.6	59.1
0°-60°	12302.8	90.7
0°-90°	13567.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	13567.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8561	
5°	8432	789
15°	7163	2008
25°	5564	2561
35°	4238	2656
45°	3185	2447
55°	2061	1841
65°	994	994
75°	230	267
85°	0	4
90°	0	



TEST NUMBER: P684808

CATALOG NUMBER: LX6C120D010 EX61209040 6LBSLI

CANDELA DISTRIBUTION (FULL):

0°	
0°	8561.4
2.5°	8532.8
5°	8431.7
7.5°	8244.3
10°	7912.7
12.5°	7581.5
15°	7163.3
17.5°	6774.4
20°	6370.7
22.5°	5952.8
25°	5563.6
27.5°	5188.9
30°	4842.8
32.5°	4525.7
35°	4237.6
37.5°	3963.6
40°	3704.1
42.5°	3430.5
45°	3185.2
47.5°	2911.5
50°	2637.6
52.5°	2349.4
55°	2061.0
57.5°	1772.9
60°	1498.9
62.5°	1239.4
65°	994.4
67.5°	763.9
70°	562.1
72.5°	389.2
75°	230.5
77.5°	100.8
80°	29.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)