

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P785432

Luminaire Tested: LERS6D02D010-EC6DR300210IC9027-6LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P785432
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LERS6D02D010-EC6DR300210IC9027-6LBS1B
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 590.5 lumens
Efficiency: N/A
Efficacy: 115.8 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P785432

CATALOG NUMBER: LERS6D02D010-EC6DR300210IC9027-6LBS1B

Luminous Intensity Polar Plot

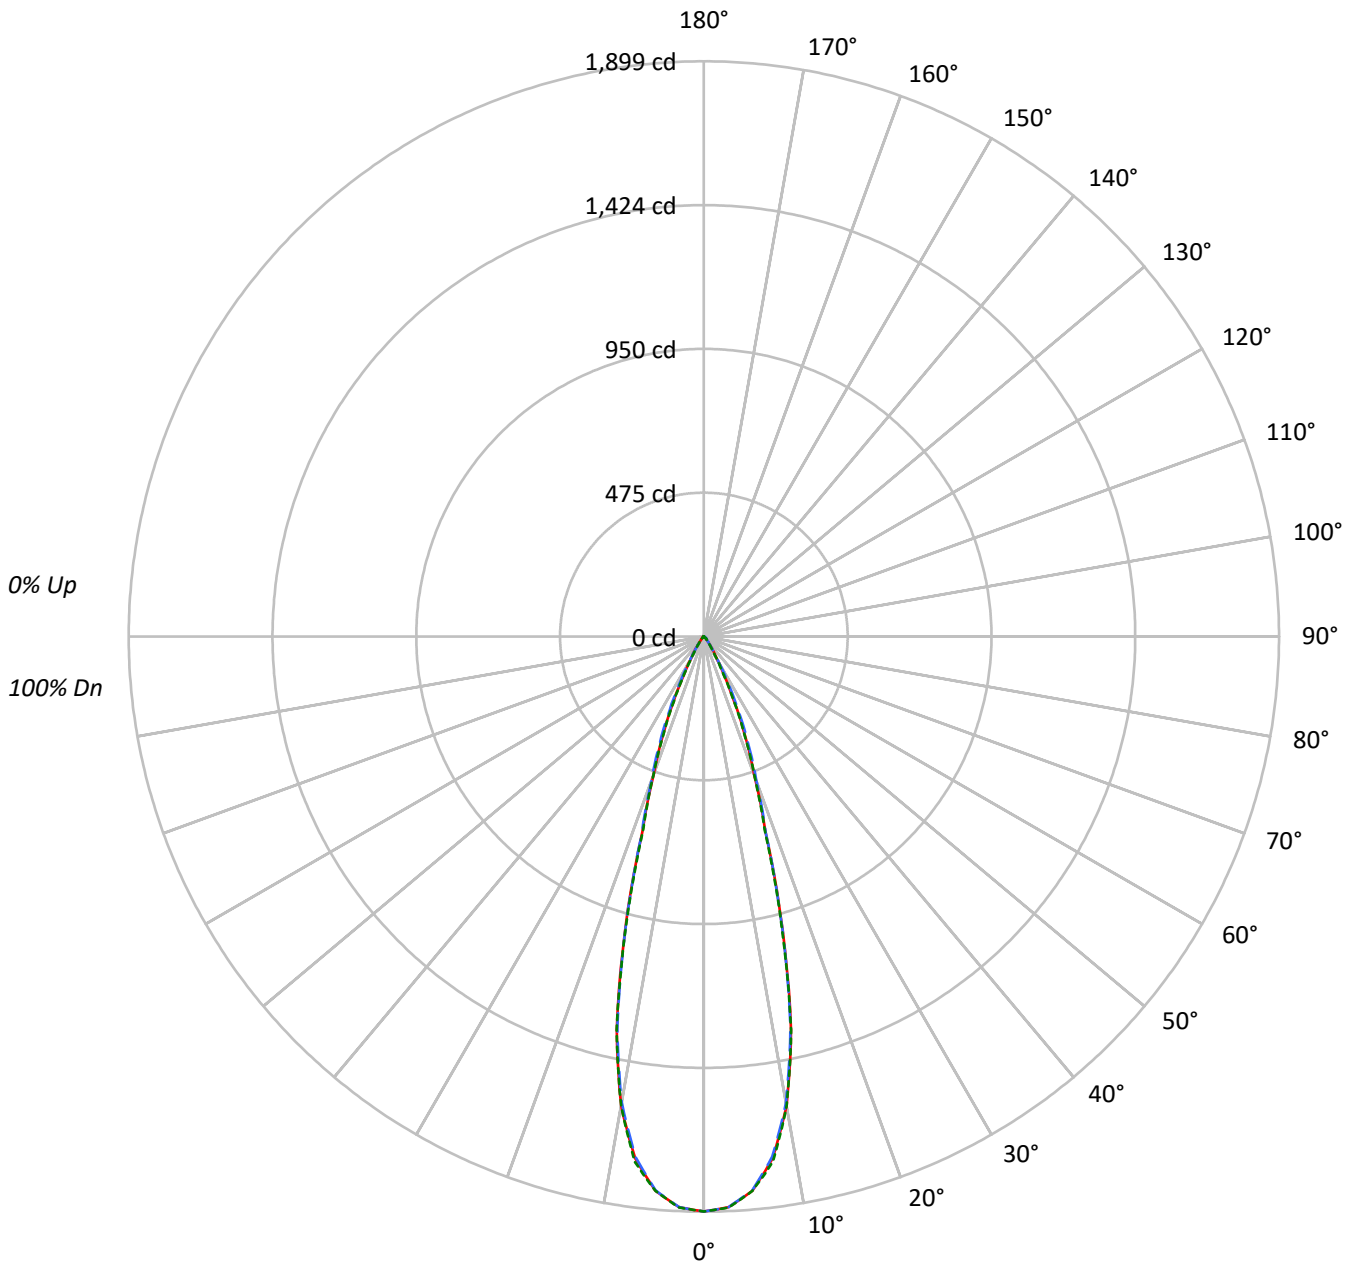



TEST NUMBER: P785432

CATALOG NUMBER: LERS6D02D010-EC6DR300210IC9027-6LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	145325	145325	145325
5°	141155	140986	141163
10°	122260	121397	122229
15°	79767	79339	78942
20°	39669	41151	39612
25°	19982	22533	19569
30°	7999	8715	6974
35°	3710	3551	2981
40°	1599	1779	1509
45°	1126	1407	1137
50°	393	1024	405
55°	227	427	240
60°	153	184	153
65°	109	109	109
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 1407 cd/sqm



TEST NUMBER: P785432

CATALOG NUMBER: LERS6D02D010-EC6DR300210IC9027-6LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	167.0	28.3
10°-20°	268.9	45.5
20°-30°	116.2	19.7
30°-40°	26.5	4.5
40°-50°	9.1	1.5
50°-60°	2.2	0.4
60°-70°	0.6	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	552.0	93.5
0°-40°	578.5	98.0
0°-60°	589.8	99.9
0°-90°	590.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	590.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1899	1899	1899	1899	1899	
5°	1837	1835	1835	1839	1837	167
15°	1007	994	1001	998	996	270
25°	237	246	267	239	232	113
35°	40	40	38	38	32	27
45°	10	13	13	13	10	7
55°	2	2	3	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P785432

CATALOG NUMBER: LERS6D02D010-EC6DR300210IC9027-6LBS1B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1898.6	1898.6	1898.6	1898.6	1898.6
2.5°	1886.0	1884.7	1885.5	1886.4	1886.8
5°	1837.1	1835.3	1834.9	1838.8	1837.2
7.5°	1738.4	1735.9	1732.0	1740.7	1748.8
10°	1573.0	1570.2	1561.9	1566.0	1572.6
12.5°	1328.9	1319.8	1319.7	1332.7	1330.9
15°	1006.6	994.5	1001.2	998.0	996.2
17.5°	676.9	672.3	681.2	678.5	666.9
20°	487.0	488.2	505.2	496.7	486.3
22.5°	355.3	359.7	379.9	357.9	349.7
25°	236.6	245.5	266.8	239.3	231.7
27.5°	145.5	149.6	171.1	143.6	139.5
30°	90.5	88.5	98.6	84.6	78.9
32.5°	59.4	56.8	60.0	53.9	49.2
35°	39.7	40.5	38.0	37.8	31.9
37.5°	24.8	28.5	25.2	26.8	20.5
40°	16.0	20.7	17.8	19.7	15.1
42.5°	13.1	15.9	14.6	15.6	13.4
45°	10.4	13.0	13.0	13.0	10.5
47.5°	5.8	8.7	11.1	8.9	6.2
50°	3.3	4.4	8.6	4.6	3.4
52.5°	2.2	2.5	5.9	2.6	2.3
55°	1.7	1.8	3.2	1.9	1.8
57.5°	1.3	1.4	1.7	1.4	1.3
60°	1.0	1.0	1.2	1.1	1.0
62.5°	0.7	0.7	0.8	0.7	0.7
65°	0.6	0.6	0.6	0.6	0.6
67.5°	0.3	0.4	0.4	0.4	0.4
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)