

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P786010

Luminaire Tested: LERS6D08D010-EC6DR200210IC9027-6LBS1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P786010  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LERS6D08D010-EC6DR200210IC9027-6LBS1LI  
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 20° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 881.8 lumens  
Efficiency: N/A  
Efficacy: 99.1 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 8.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P786010

CATALOG NUMBER: LERS6D08D010-EC6DR200210IC9027-6LBS1LI

### Luminous Intensity Polar Plot

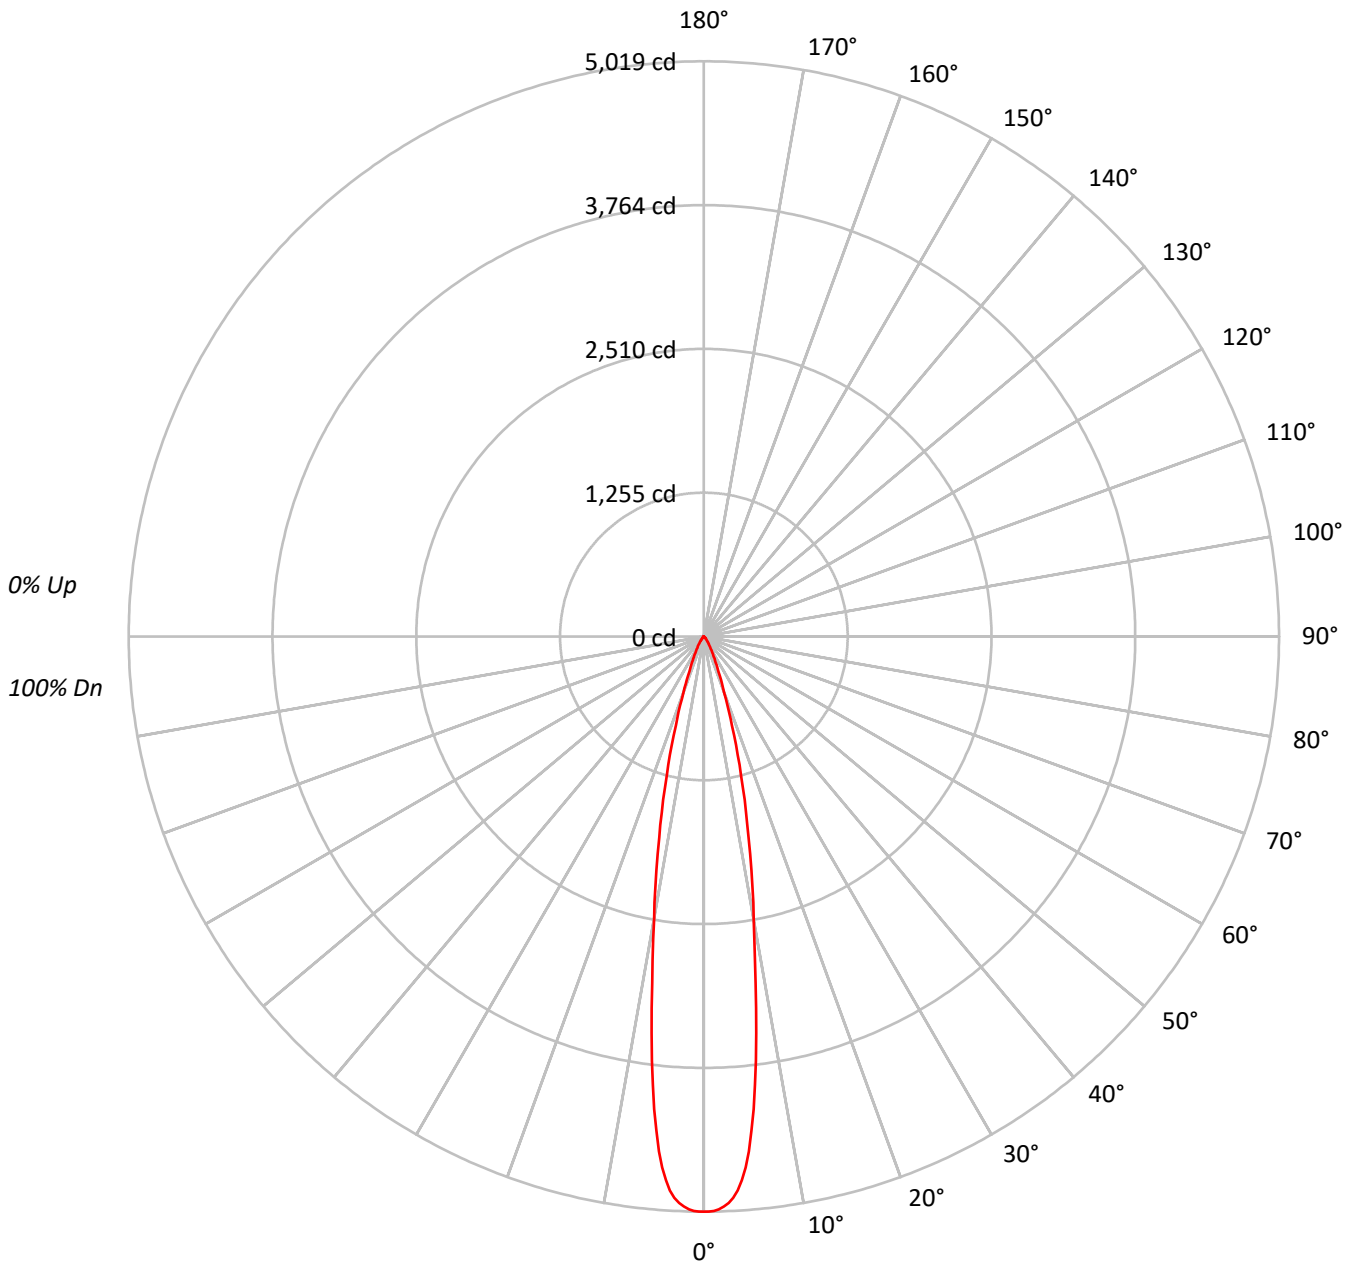



TEST NUMBER: P786010

CATALOG NUMBER: LERS6D08D010-EC6DR200210IC9027-6LBS1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20																		
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	100	100	100	100	100																	
	1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	96	95	94	93	92	91	90	89	88	87																	
	2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	93	92	91	90	89	88	87	86	85	84																	
	3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	90	89	88	87	86	85	84	83	82	81																	
	4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	87	86	85	84	83	82	81	80	79	78																	
	5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	84	83	82	81	80	79	78	77	76	75																	
	6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	82	81	80	79	78	77	76	75	74	73																	
	7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	80	79	78	77	76	75	74	73	72	71																	
	8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	78	77	76	75	74	73	72	71	70	69																	
	9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	76	75	74	73	72	71	70	69	68	67																	
	10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	74	73	72	71	70	69	68	67	66	65																	

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	548402
5°	494758
10°	277687
15°	141156
20°	59764
25°	27583
30°	14610
35°	7870
40°	4208
45°	2488
50°	1445
55°	762
60°	481
65°	336
70°	128
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2488 cd/sqm



TEST NUMBER: P786010

CATALOG NUMBER: LERS6D08D010-EC6DR200210IC9027-6LBS1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	357.4	40.5
10°-20°	351.9	39.9
20°-30°	115.0	13.0
30°-40°	39.1	4.4
40°-50°	13.2	1.5
50°-60°	4.0	0.4
60°-70°	1.3	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	824.2	93.5
0°-40°	863.3	97.9
0°-60°	880.5	99.8
0°-90°	881.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	881.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5019	
5°	4511	357
15°	1248	352
25°	229	115
35°	59	39
45°	16	13
55°	4	4
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P786010

CATALOG NUMBER: LERS6D08D010-EC6DR200210IC9027-6LBS1LI

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	5019.2
0.5°	5019.2
1°	5012.9
1.5°	5000.4
2°	4977.6
2.5°	4947.2
3°	4904.3
3.5°	4844.4
4°	4755.5
4.5°	4647.3
5°	4511.0
5.5°	4331.8
6°	4148.1
6.5°	3937.6
7°	3731.5
7.5°	3490.2
8°	3274.8
8.5°	3058.0
9°	2857.8
9.5°	2674.1
10°	2502.9
12.5°	1797.2
15°	1247.9
17.5°	815.2
20°	514.0
22.5°	333.0
25°	228.8
27.5°	160.9
30°	115.8
32.5°	83.1
35°	59.0
37.5°	41.1
40°	29.5
42.5°	21.5
45°	16.1
47.5°	12.5
50°	8.5
52.5°	5.4
55°	4.0
57.5°	3.1
60°	2.2
62.5°	1.8
65°	1.3



TEST NUMBER: P786010

CATALOG NUMBER: LERS6D08D010-EC6DR200210IC9027-6LBS1LI

**CANDELA DISTRIBUTION (continued):**

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



67.5°		0.9
70°		0.4

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)