

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P787370

Luminaire Tested: LER6D02D010-EC6DR600210IC9027-6LBDP1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P787370  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D02D010-EC6DR600210IC9027-6LBDP1MW  
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 556.4 lumens  
Efficiency: N/A  
Efficacy: 109.1 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P787370

CATALOG NUMBER: LER6D02D010-EC6DR600210IC9027-6LBDP1MW

### Luminous Intensity Polar Plot

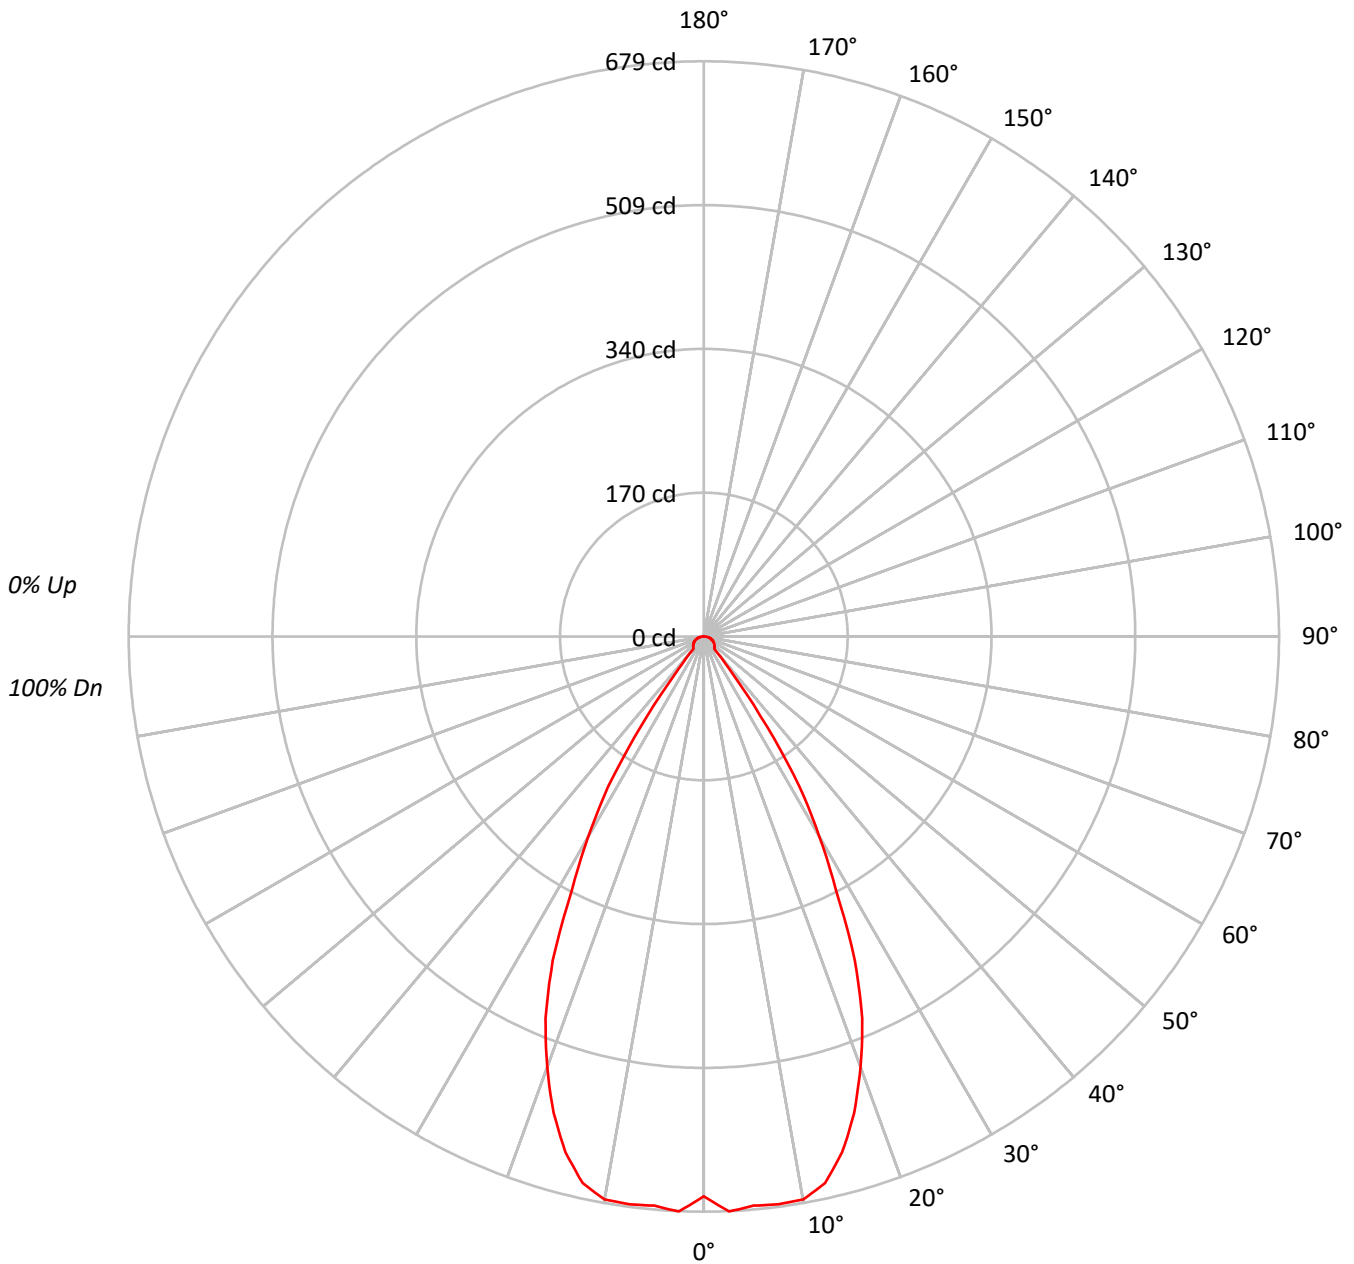



TEST NUMBER: P787370

CATALOG NUMBER: LER6D02D010-EC6DR600210IC9027-6LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86	86	86	86
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80	80	80	80
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75	75	75	75
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70	70	70	70
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66	66	66	66
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62	62	62	62
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59	59	59	59
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55	55	55	55
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53	53	53	53

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	72200
5°	73978
10°	74867
15°	71319
20°	62880
25°	50863
30°	34405
35°	17246
40°	2796
45°	2735
50°	2788
55°	2838
60°	2906
65°	2973
70°	3035
75°	3082
80°	2957
85°	2507

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 3082 cd/sqm



TEST NUMBER: P787370

CATALOG NUMBER: LER6D02D010-EC6DR600210IC9027-6LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	64.5	11.6
10°-20°	174.4	31.3
20°-30°	187.7	33.7
30°-40°	81.6	14.7
40°-50°	13.7	2.5
50°-60°	13.3	2.4
60°-70°	11.4	2.0
70°-80°	7.6	1.4
80°-90°	2.3	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	426.5	76.7
0°-40°	508.1	91.3
0°-60°	535.1	96.2
0°-90°	556.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	556.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	661	
5°	674	64
15°	630	174
25°	422	188
35°	129	82
45°	18	14
55°	15	13
65°	12	11
75°	7	8
85°	2	2
90°	0	



TEST NUMBER: P787370

CATALOG NUMBER: LER6D02D010-EC6DR600210IC9027-6LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	660.8
2.5°	679.4
5°	674.5
7.5°	676.0
10°	674.8
12.5°	660.9
15°	630.5
17.5°	589.8
20°	540.8
22.5°	488.5
25°	421.9
27.5°	337.5
30°	272.7
32.5°	210.2
35°	129.3
37.5°	55.3
40°	19.6
42.5°	18.1
45°	17.7
47.5°	17.1
50°	16.4
52.5°	15.7
55°	14.9
57.5°	14.1
60°	13.3
62.5°	12.5
65°	11.5
67.5°	10.6
70°	9.5
72.5°	8.4
75°	7.3
77.5°	6.0
80°	4.7
82.5°	3.4
85°	2.0
87.5°	0.7
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)