

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P789322

Luminaire Tested: LER6D10D010-EC6DR650210IC9050-6LBDP1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P789322  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D10D010-EC6DR650210IC9050-6LBDP1MW  
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1470.3 lumens  
Efficiency: N/A  
Efficacy: 125.7 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P789322

CATALOG NUMBER: LER6D10D010-EC6DR650210IC9050-6LBDP1MW

### Luminous Intensity Polar Plot

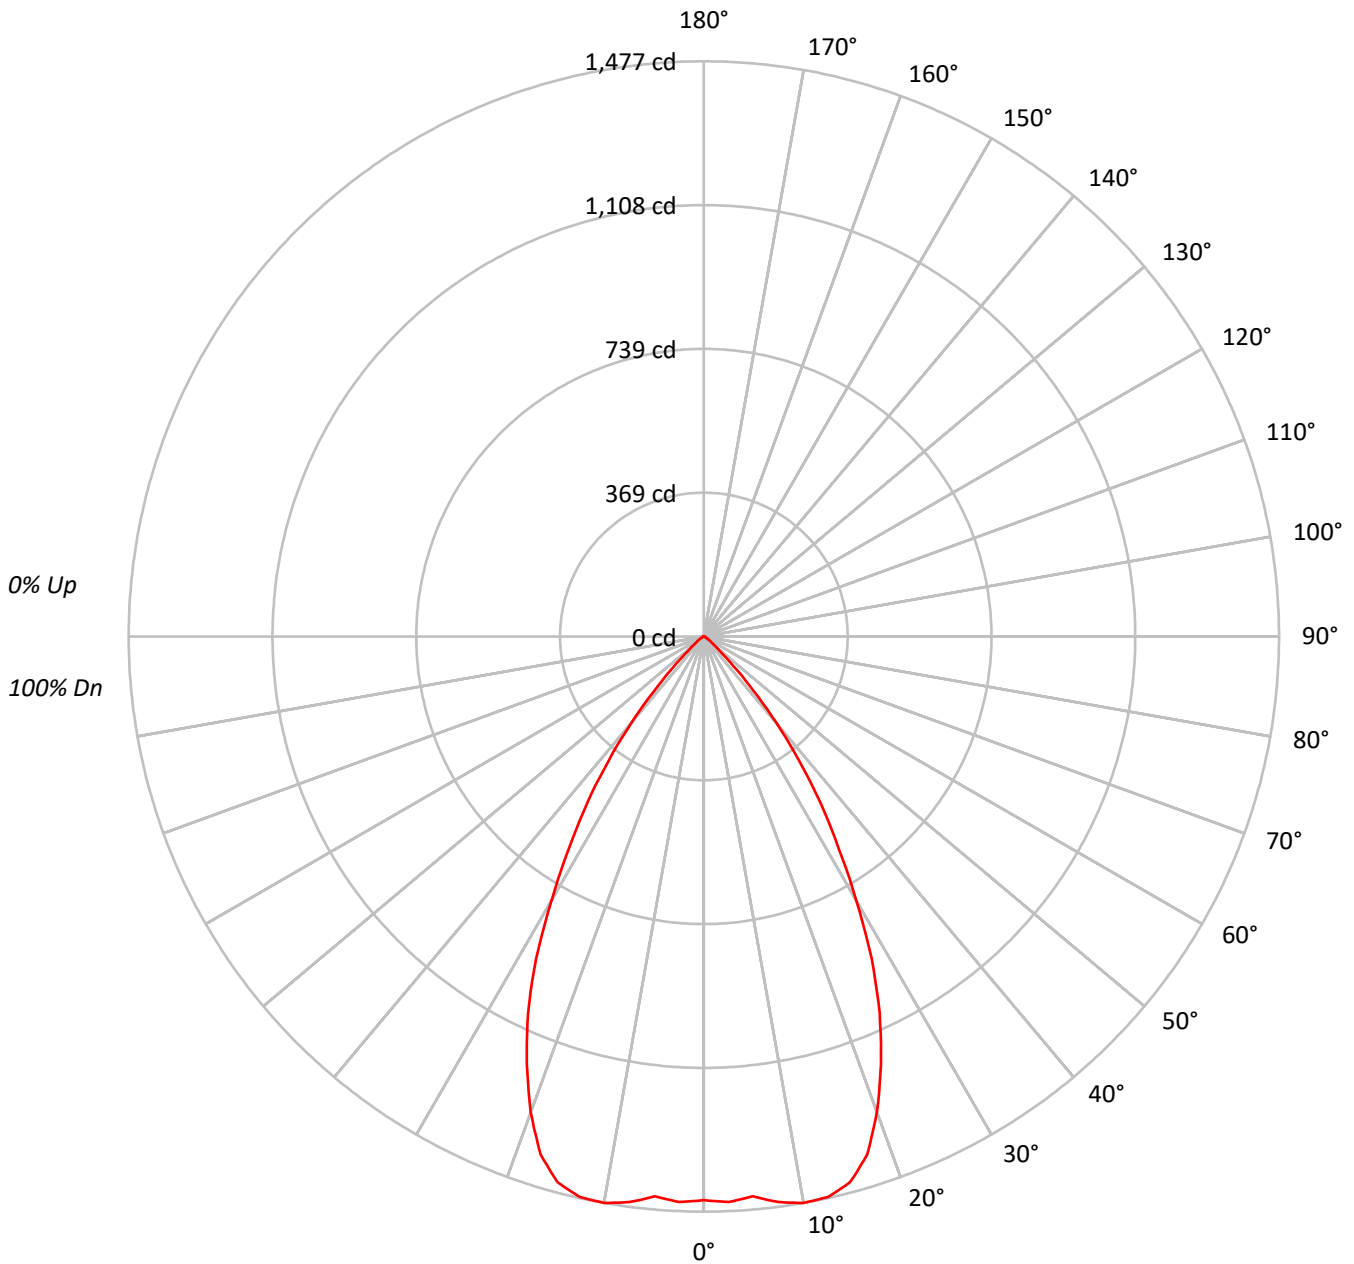



TEST NUMBER: P789322

CATALOG NUMBER: LER6D10D010-EC6DR650210IC9050-6LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	158166
5°	158298
10°	163868
15°	164141
20°	151120
25°	128754
30°	98572
35°	69639
40°	41106
45°	16688
50°	6051
55°	3372
60°	1923
65°	1060
70°	1118
75°	887
80°	881
85°	752

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 16688 cd/sqm



TEST NUMBER: P789322

CATALOG NUMBER: LER6D10D010-EC6DR650210IC9050-6LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	139.4	9.5
10°-20°	402.1	27.3
20°-30°	482.4	32.8
30°-40°	324.2	22.1
40°-50°	97.0	6.6
50°-60°	17.1	1.2
60°-70°	4.9	0.3
70°-80°	2.4	0.2
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1023.9	69.6
0°-40°	1348.1	91.7
0°-60°	1462.3	99.5
0°-90°	1470.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1470.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1448	
5°	1443	139
15°	1451	402
25°	1068	482
35°	522	324
45°	108	97
55°	18	17
65°	4	5
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P789322

CATALOG NUMBER: LER6D10D010-EC6DR650210IC9050-6LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1447.6
2.5°	1453.7
5°	1443.3
7.5°	1465.1
10°	1477.0
12.5°	1474.1
15°	1451.1
17.5°	1394.7
20°	1299.7
22.5°	1187.8
25°	1068.0
27.5°	932.9
30°	781.3
32.5°	643.9
35°	522.1
37.5°	401.8
40°	288.2
42.5°	188.2
45°	108.0
47.5°	57.2
50°	35.6
52.5°	24.7
55°	17.7
57.5°	12.8
60°	8.8
62.5°	5.8
65°	4.1
67.5°	3.7
70°	3.5
72.5°	2.7
75°	2.1
77.5°	1.9
80°	1.4
82.5°	1.0
85°	0.6
87.5°	0.4
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)