

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P789479

Luminaire Tested: LER6D15D010-EC6DR2015309027-6LBDP1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P789479
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D15D010-EC6DR2015309027-6LBDDP1LI
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1505.0 lumens
Efficiency: N/A
Efficacy: 95.3 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P789479
CATALOG NUMBER: LER6D15D010-EC6DR2015309027-6LBDP1LI

Luminous Intensity Polar Plot

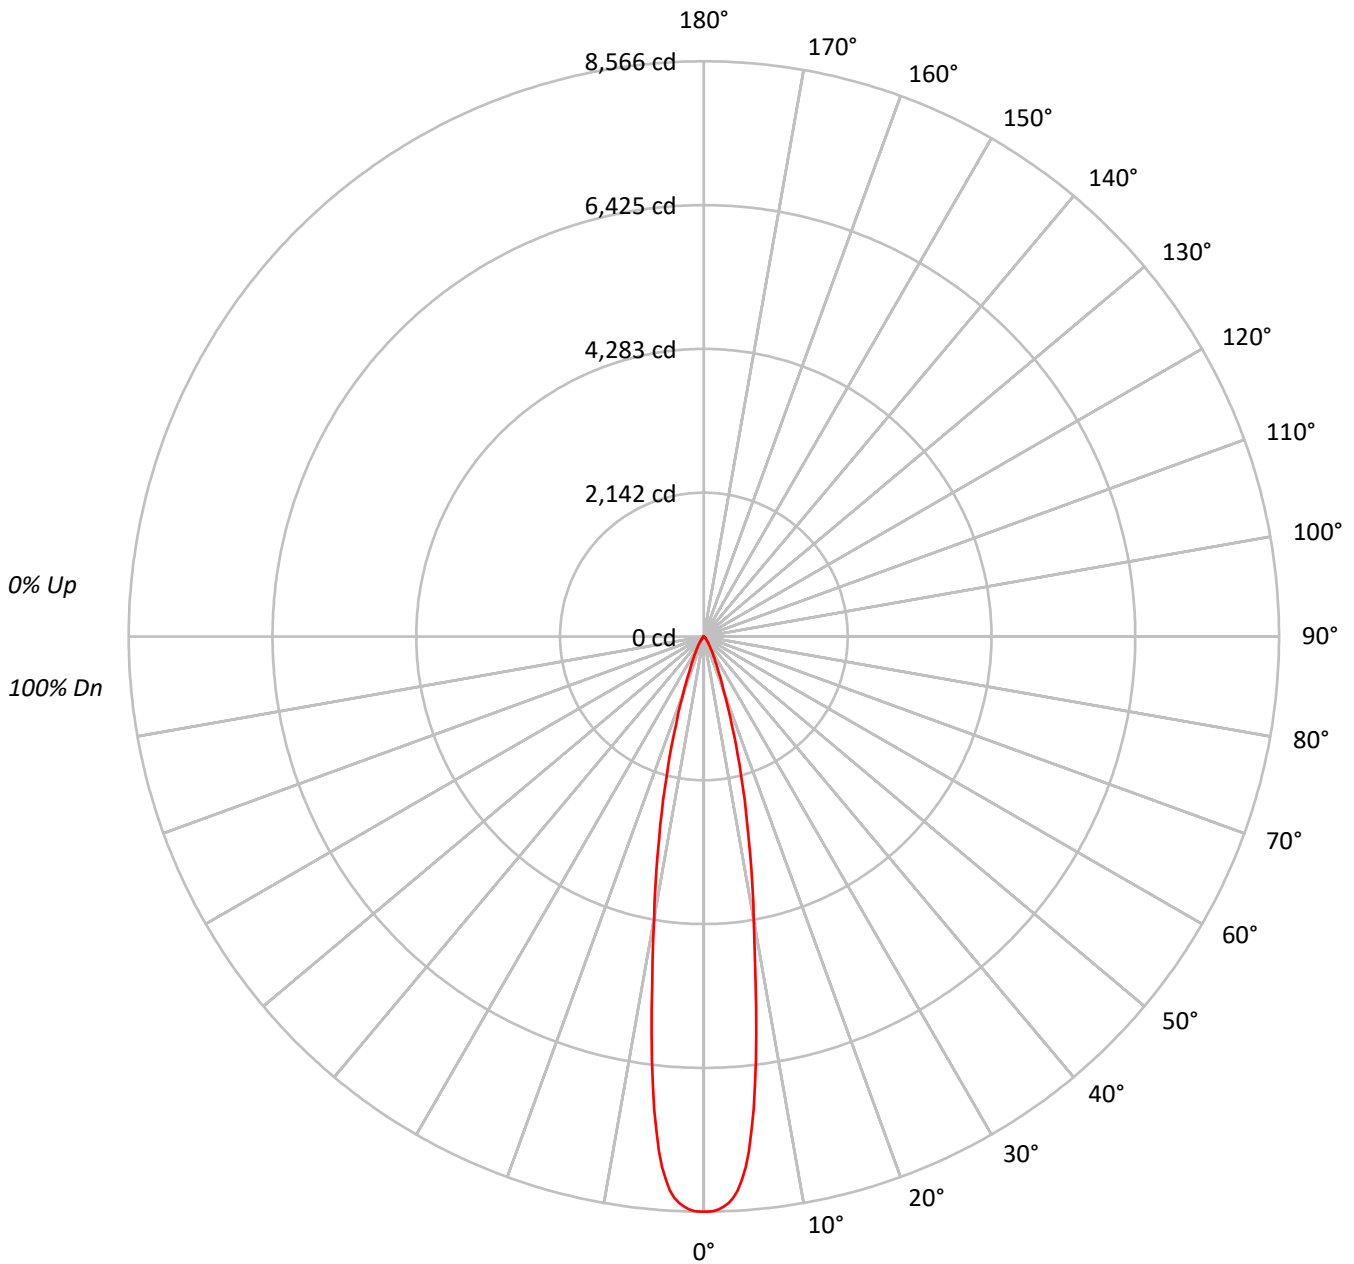



TEST NUMBER: P789479

CATALOG NUMBER: LER6D15D010-EC6DR2015309027-6LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	98	96	95	94															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	98	96	95	94															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	95	93	92	91															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	93	91	89	88															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	91	88	86	85															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	88	86	84	83															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	86	84	82	81															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	84	82	80	79															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	82	80	78	77															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	81	78	76	75															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	935884
5°	844346
10°	473896
15°	240890
20°	101995
25°	47077
30°	24930
35°	13432
40°	7174
45°	4249
50°	2465
55°	1314
60°	830
65°	595
70°	256
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 4249 cd/sqm



TEST NUMBER: P789479

CATALOG NUMBER: LER6D15D010-EC6DR2015309027-6LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	609.9	40.5
10°-20°	600.5	39.9
20°-30°	196.2	13.0
30°-40°	66.8	4.4
40°-50°	22.5	1.5
50°-60°	6.8	0.4
60°-70°	2.3	0.2
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1406.6	93.5
0°-40°	1473.4	97.9
0°-60°	1502.6	99.8
0°-90°	1505.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1505.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8566	
5°	7698	610
15°	2130	601
25°	390	196
35°	101	67
45°	28	22
55°	7	7
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P789479

CATALOG NUMBER: LER6D15D010-EC6DR2015309027-6LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	8565.6
0.5°	8565.6
1°	8554.9
1.5°	8533.6
2°	8494.7
2.5°	8442.8
3°	8369.6
3.5°	8267.4
4°	8115.6
4.5°	7931.0
5°	7698.4
5.5°	7392.5
6°	7079.0
6.5°	6719.8
7°	6368.2
7.5°	5956.3
8°	5588.6
8.5°	5218.7
9°	4877.0
9.5°	4563.5
10°	4271.4
12.5°	3067.0
15°	2129.6
17.5°	1391.2
20°	877.2
22.5°	568.2
25°	390.5
27.5°	274.6
30°	197.6
32.5°	141.9
35°	100.7
37.5°	70.2
40°	50.3
42.5°	36.6
45°	27.5
47.5°	21.4
50°	14.5
52.5°	9.2
55°	6.9
57.5°	5.3
60°	3.8
62.5°	3.1
65°	2.3



TEST NUMBER: P789479
CATALOG NUMBER: LER6D15D010-EC6DR2015309027-6LBDP1LI

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



67.5°		1.5
70°		0.8

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)