

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P789876

Luminaire Tested: LER6D15D010-EC6DR600215IC9040-6LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P789876
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D15D010-EC6DR600215IC9040-6LBDP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2651.8 lumens
Efficiency: N/A
Efficacy: 167.8 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P789876

CATALOG NUMBER: LER6D15D010-EC6DR600215IC9040-6LBDP1H

Luminous Intensity Polar Plot

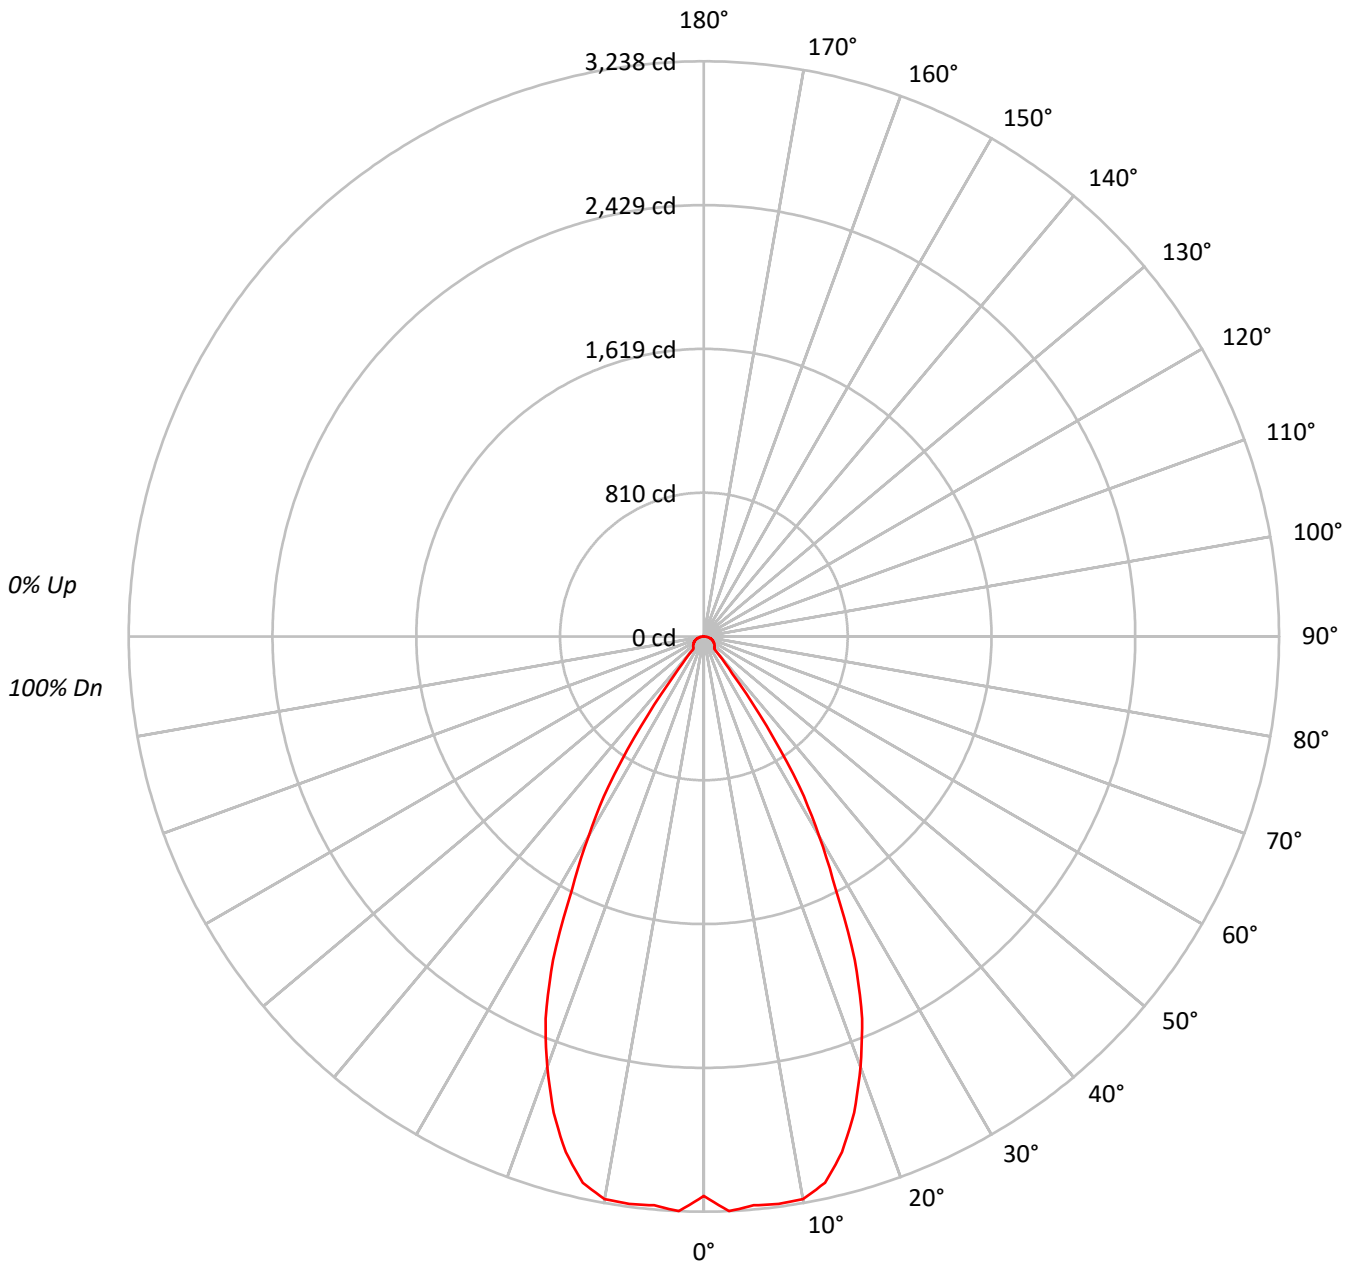



TEST NUMBER: P789876

CATALOG NUMBER: LER6D15D010-EC6DR600215IC9040-6LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62																			
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59																			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	344106
5°	352571
10°	356825
15°	339933
20°	299717
25°	242414
30°	163975
35°	82164
40°	13336
45°	13041
50°	13309
55°	13506
60°	13876
65°	14193
70°	14535
75°	14691
80°	14157
85°	11784

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 14691 cd/sqm



TEST NUMBER: P789876

CATALOG NUMBER: LER6D15D010-EC6DR600215IC9040-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	307.2	11.6
10°-20°	831.2	31.3
20°-30°	894.4	33.7
30°-40°	388.7	14.7
40°-50°	65.3	2.5
50°-60°	63.5	2.4
60°-70°	54.3	2.0
70°-80°	36.3	1.4
80°-90°	10.9	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2032.8	76.7
0°-40°	2421.6	91.3
0°-60°	2550.4	96.2
0°-90°	2651.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2651.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3149	
5°	3215	307
15°	3005	831
25°	2011	894
35°	616	389
45°	84	65
55°	71	63
65°	55	54
75°	35	36
85°	9	11
90°	0	



TEST NUMBER: P789876

CATALOG NUMBER: LER6D15D010-EC6DR600215IC9040-6LBDP1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	3149.4
2.5°	3238.0
5°	3214.6
7.5°	3222.0
10°	3216.2
12.5°	3149.8
15°	3005.2
17.5°	2810.9
20°	2577.7
22.5°	2328.1
25°	2010.8
27.5°	1608.3
30°	1299.7
32.5°	1001.7
35°	616.0
37.5°	263.5
40°	93.5
42.5°	86.1
45°	84.4
47.5°	81.6
50°	78.3
52.5°	74.6
55°	70.9
57.5°	67.2
60°	63.5
62.5°	59.4
65°	54.9
67.5°	50.4
70°	45.5
72.5°	40.2
75°	34.8
77.5°	28.7
80°	22.5
82.5°	16.0
85°	9.4
87.5°	3.3
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)