

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P790115

Luminaire Tested: LER6D20D010-EC6DR2015309040-6LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P790115
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D20D010-EC6DR2015309040-6LBS1B
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2171.6 lumens
Efficiency: N/A
Efficacy: 94.0 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 23.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P790115
CATALOG NUMBER: LER6D20D010-EC6DR2015309040-6LBS1B

Luminous Intensity Polar Plot

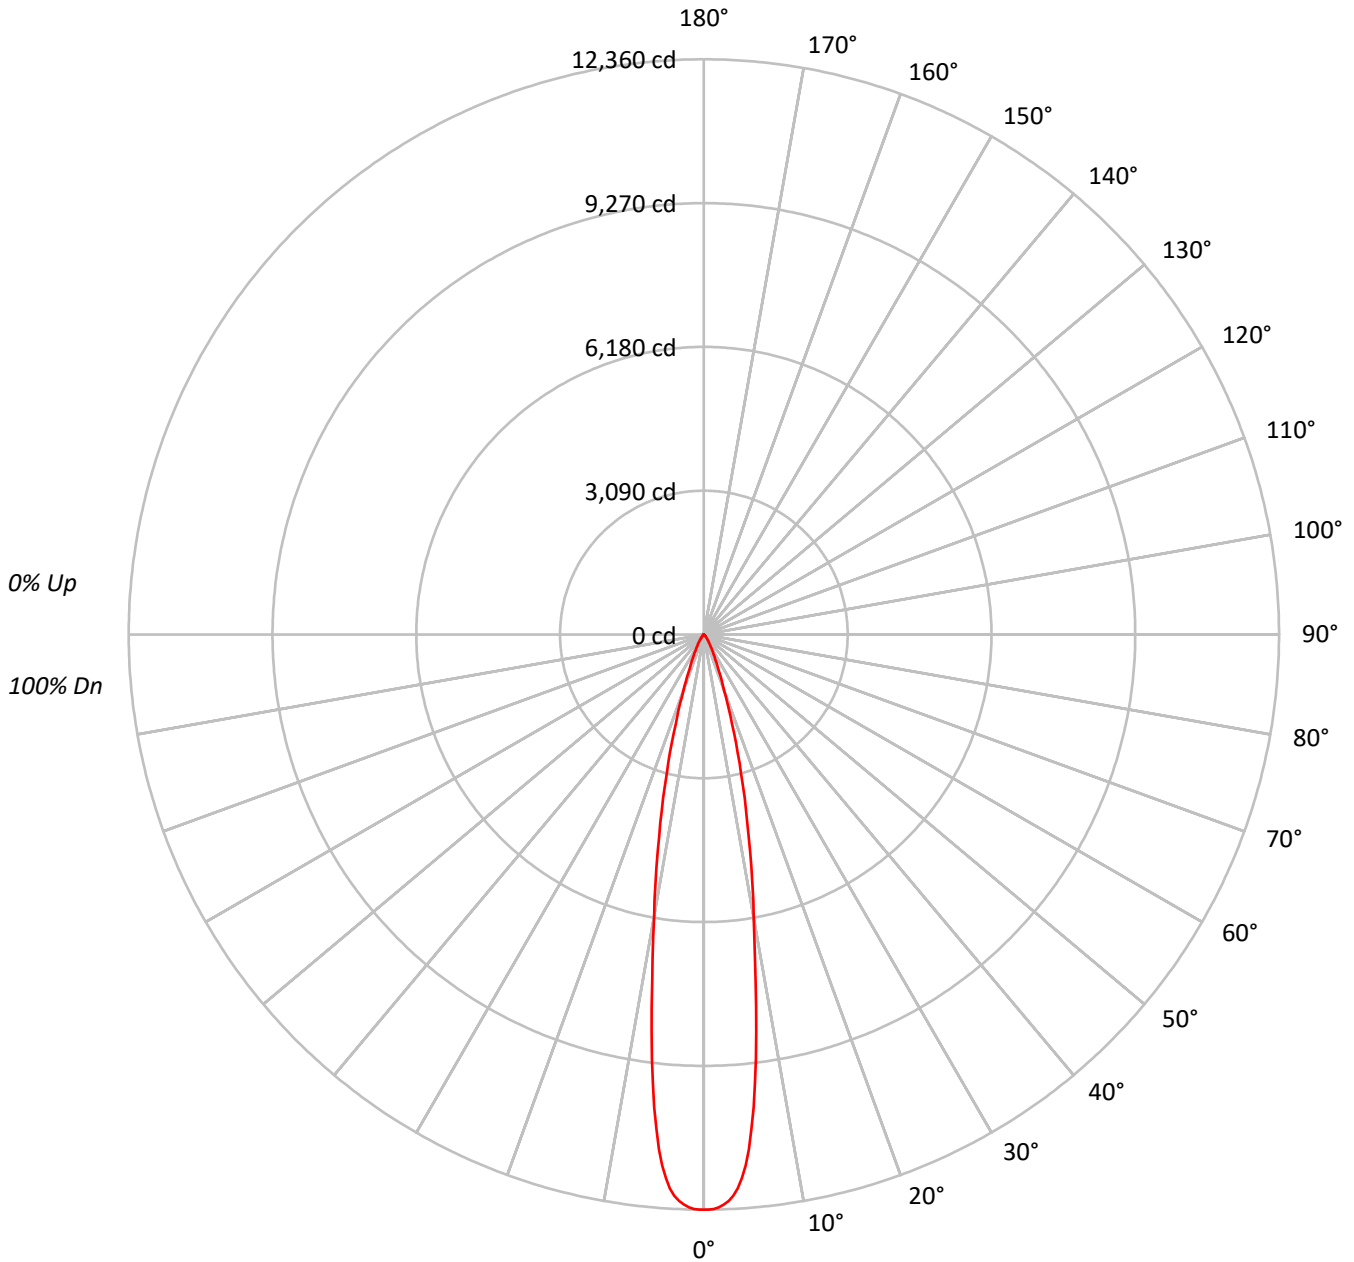



TEST NUMBER: P790115

CATALOG NUMBER: LER6D20D010-EC6DR2015309040-6LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	97	97																
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	94	94																
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	91	91																
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	88	88																
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	85	85																
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	83	83																
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	81	81																
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	79	79																
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	77	77																
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	75	75																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1350485
5°	1218392
10°	683828
15°	347603
20°	147167
25°	67933
30°	35969
35°	19381
40°	10355
45°	6119
50°	3553
55°	1886
60°	1202
65°	853
70°	351
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 6119 cd/sqm



TEST NUMBER: P790115

CATALOG NUMBER: LER6D20D010-EC6DR2015309040-6LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	880.0	40.5
10°-20°	866.5	39.9
20°-30°	283.1	13.0
30°-40°	96.4	4.4
40°-50°	32.4	1.5
50°-60°	9.8	0.4
60°-70°	3.2	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2029.7	93.5
0°-40°	2126.0	97.9
0°-60°	2168.2	99.8
0°-90°	2171.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2171.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12360	
5°	11109	880
15°	3073	867
25°	564	283
35°	145	96
45°	40	32
55°	10	10
65°	3	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P790115

CATALOG NUMBER: LER6D20D010-EC6DR2015309040-6LBS1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	12360.2
0.5°	12360.2
1°	12344.8
1.5°	12314.0
2°	12257.8
2.5°	12183.0
3°	12077.3
3.5°	11929.9
4°	11710.8
4.5°	11444.5
5°	11108.8
5.5°	10667.4
6°	10215.1
6.5°	9696.7
7°	9189.3
7.5°	8594.9
8°	8064.4
8.5°	7530.6
9°	7037.5
9.5°	6585.1
10°	6163.6
12.5°	4425.7
15°	3073.0
17.5°	2007.6
20°	1265.7
22.5°	820.0
25°	563.5
27.5°	396.2
30°	285.1
32.5°	204.7
35°	145.3
37.5°	101.3
40°	72.6
42.5°	52.8
45°	39.6
47.5°	30.8
50°	20.9
52.5°	13.2
55°	9.9
57.5°	7.7
60°	5.5
62.5°	4.4
65°	3.3



TEST NUMBER: P790115

CATALOG NUMBER: LER6D20D010-EC6DR2015309040-6LBS1B

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





67.5°		2.2
70°		1.1

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)