

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P790479

Luminaire Tested: LER6D20D010-EC6DR6020359030-6LBDP1B

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P790479  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D20D010-EC6DR6020359030-6LB DP1B  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2643.2 lumens  
Efficiency: N/A  
Efficacy: 114.4 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 23.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P790479  
CATALOG NUMBER: LER6D20D010-EC6DR6020359030-6LBDP1B

### Luminous Intensity Polar Plot

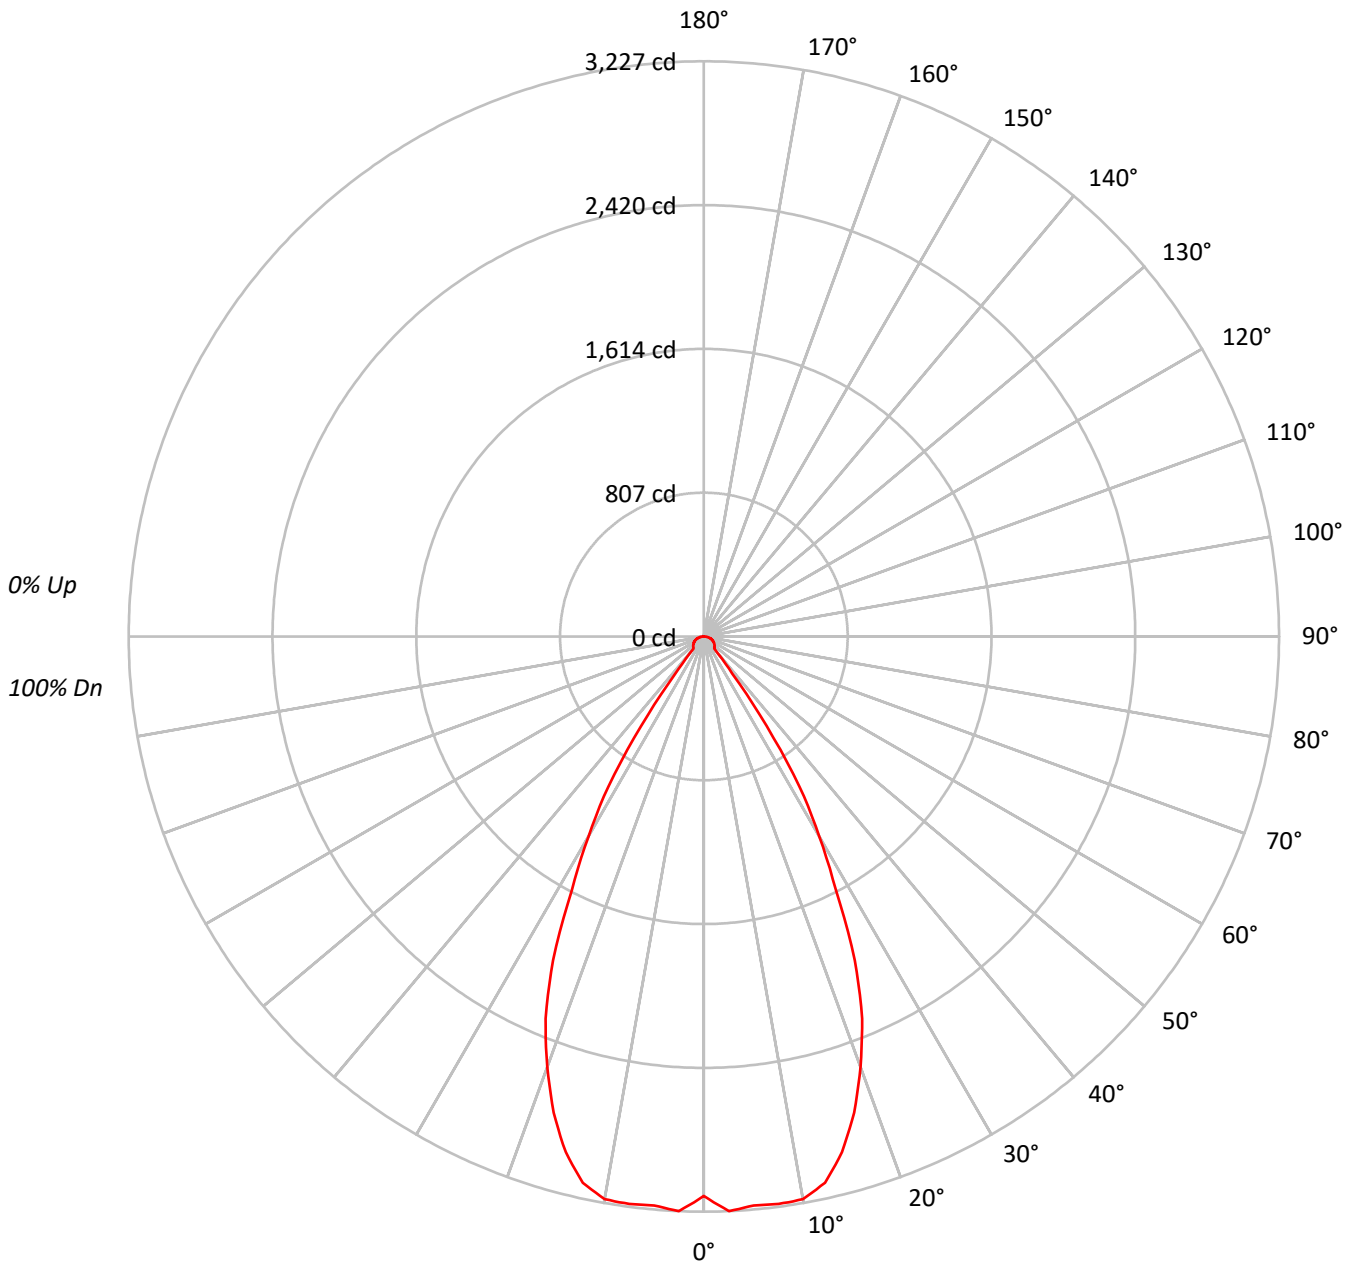



TEST NUMBER: P790479

CATALOG NUMBER: LER6D20D010-EC6DR6020359030-6LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86	86	86	86
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80	80	80	80
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75	75	75	75
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70	70	70	70
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66	66	66	66
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62	62	62	62
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59	59	59	59
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55	55	55	55
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53	53	53	53

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	342991
5°	351420
10°	355672
15°	338825
20°	298740
25°	241630
30°	163445
35°	81897
40°	13279
45°	13010
50°	13258
55°	13468
60°	13832
65°	14142
70°	14471
75°	14649
80°	14157
85°	11784

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 14649 cd/sqm



TEST NUMBER: P790479

CATALOG NUMBER: LER6D20D010-EC6DR6020359030-6LBDP1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	306.2	11.6
10°-20°	828.5	31.3
20°-30°	891.4	33.7
30°-40°	387.5	14.7
40°-50°	65.1	2.5
50°-60°	63.3	2.4
60°-70°	54.1	2.0
70°-80°	36.2	1.4
80°-90°	10.8	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2026.2	76.7
0°-40°	2413.7	91.3
0°-60°	2542.1	96.2
0°-90°	2643.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2643.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3139	
5°	3204	306
15°	2995	829
25°	2004	891
35°	614	387
45°	84	65
55°	71	63
65°	55	54
75°	35	36
85°	9	11
90°	0	



TEST NUMBER: P790479

CATALOG NUMBER: LER6D20D010-EC6DR6020359030-6LBDP1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3139.2
2.5°	3227.4
5°	3204.1
7.5°	3211.5
10°	3205.8
12.5°	3139.6
15°	2995.4
17.5°	2801.7
20°	2569.3
22.5°	2320.5
25°	2004.3
27.5°	1603.1
30°	1295.5
32.5°	998.5
35°	614.0
37.5°	262.7
40°	93.1
42.5°	85.8
45°	84.2
47.5°	81.3
50°	78.0
52.5°	74.4
55°	70.7
57.5°	67.0
60°	63.3
62.5°	59.2
65°	54.7
67.5°	50.2
70°	45.3
72.5°	40.0
75°	34.7
77.5°	28.6
80°	22.5
82.5°	15.9
85°	9.4
87.5°	3.3
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)