

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P790679

Luminaire Tested: LER6D25D010-EC6DR2015309035-6LBDP1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P790679
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D25D010-EC6DR2015309035-6LB DP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2719.1 lumens
Efficiency: N/A
Efficacy: 108.3 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P790679
CATALOG NUMBER: LER6D25D010-EC6DR2015309035-6LBDP1B

Luminous Intensity Polar Plot

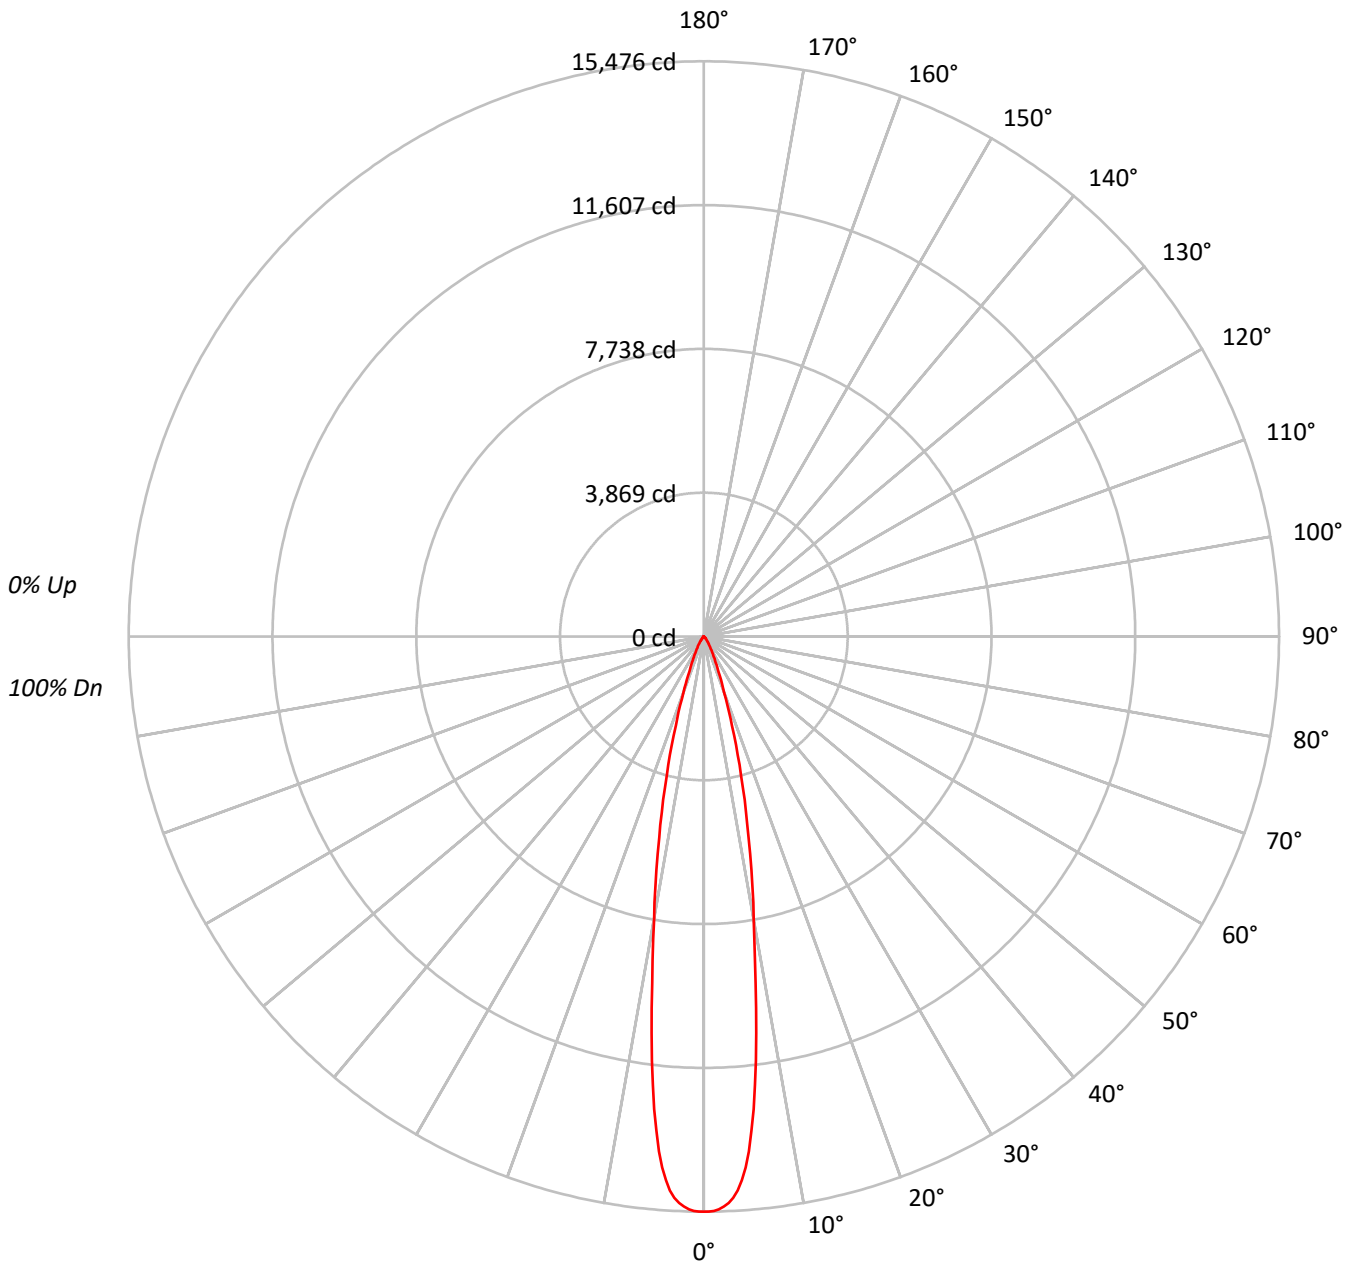



TEST NUMBER: P790679

CATALOG NUMBER: LER6D25D010-EC6DR2015309035-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	98	97															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	98	96	95	94															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	95	93	92	91															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	93	91	89	88															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	91	88	86	85															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	88	86	84	83															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	86	84	82	81															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	84	82	80	79															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	82	80	78	77															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	81	78	76	75															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1690974
5°	1525579
10°	856239
15°	435244
20°	184281
25°	85064
30°	45028
35°	24262
40°	12979
45°	7664
50°	4453
55°	2362
60°	1508
65°	1060
70°	447
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 7664 cd/sqm



TEST NUMBER: P790679

CATALOG NUMBER: LER6D25D010-EC6DR2015309035-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1101.9	40.5
10°-20°	1085.0	39.9
20°-30°	354.5	13.0
30°-40°	120.7	4.4
40°-50°	40.6	1.5
50°-60°	12.2	0.4
60°-70°	4.1	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2541.4	93.5
0°-40°	2662.1	97.9
0°-60°	2714.9	99.8
0°-90°	2719.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2719.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	15476	
5°	13910	###
15°	3848	1085
25°	706	354
35°	182	121
45°	50	41
55°	12	12
65°	4	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P790679

CATALOG NUMBER: LER6D25D010-EC6DR2015309035-6LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	15476.5
0.5°	15476.5
1°	15457.3
1.5°	15418.7
2°	15348.4
2.5°	15254.7
3°	15122.4
3.5°	14937.7
4°	14663.4
4.5°	14329.9
5°	13909.6
5.5°	13357.0
6°	12790.5
6.5°	12141.4
7°	11506.1
7.5°	10761.9
8°	10097.7
8.5°	9429.3
9°	8811.8
9.5°	8245.4
10°	7717.6
12.5°	5541.5
15°	3847.8
17.5°	2513.7
20°	1584.9
22.5°	1026.7
25°	705.6
27.5°	496.1
30°	356.9
32.5°	256.3
35°	181.9
37.5°	126.8
40°	91.0
42.5°	66.2
45°	49.6
47.5°	38.6
50°	26.2
52.5°	16.5
55°	12.4
57.5°	9.6
60°	6.9
62.5°	5.5
65°	4.1



TEST NUMBER: P790679
CATALOG NUMBER: LER6D25D010-EC6DR2015309035-6LBDP1B

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



67.5°		2.8
70°		1.4

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)