

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P791111

Luminaire Tested: LER6D25D010-EC6DR6520359035-6LBDP1B

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P791111  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D25D010-EC6DR6520359035-6LBDDP1B  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3410.1 lumens  
Efficiency: N/A  
Efficacy: 135.9 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P791111

CATALOG NUMBER: LER6D25D010-EC6DR6520359035-6LBDP1B

### Luminous Intensity Polar Plot

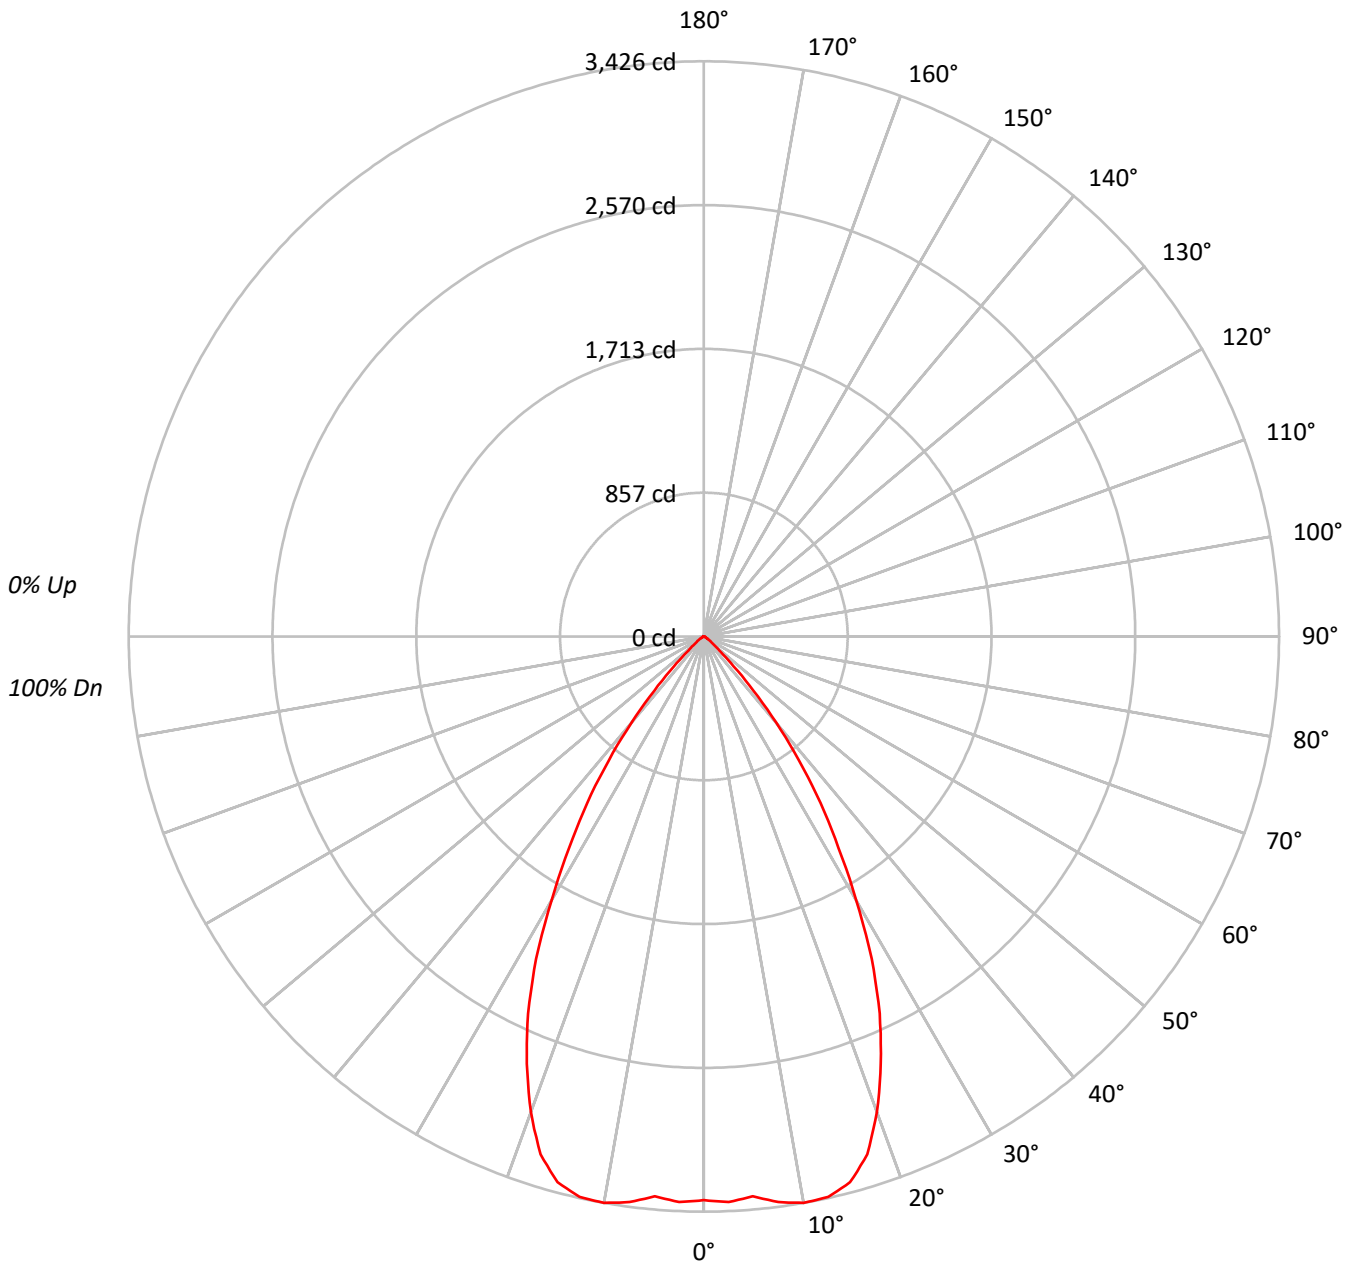



TEST NUMBER: P791111

CATALOG NUMBER: LER6D25D010-EC6DR6520359035-6LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

**AVERAGE LUMINANCE (cd/sqm):**

0°	
0°	366843
5°	367147
10°	380069
15°	380700
20°	350493
25°	298641
30°	228621
35°	161513
40°	95334
45°	38707
50°	14023
55°	7810
60°	4480
65°	2456
70°	2588
75°	2026
80°	2076
85°	1755

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 38707 cd/sqm



TEST NUMBER: P791111

CATALOG NUMBER: LER6D25D010-EC6DR6520359035-6LBDP1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	323.3	9.5
10°-20°	932.6	27.3
20°-30°	1118.9	32.8
30°-40°	751.9	22.1
40°-50°	225.1	6.6
50°-60°	39.7	1.2
60°-70°	11.3	0.3
70°-80°	5.5	0.2
80°-90°	1.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2374.8	69.6
0°-40°	3126.7	91.7
0°-60°	3391.5	99.5
0°-90°	3410.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3410.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3358	
5°	3348	323
15°	3366	933
25°	2477	1119
35°	1211	752
45°	250	225
55°	41	40
65°	10	11
75°	5	6
85°	1	2
90°	0	



TEST NUMBER: P791111

CATALOG NUMBER: LER6D25D010-EC6DR6520359035-6LBDP1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3357.5
2.5°	3371.8
5°	3347.5
7.5°	3398.0
10°	3425.7
12.5°	3419.0
15°	3365.6
17.5°	3234.9
20°	3014.4
22.5°	2754.9
25°	2477.2
27.5°	2163.7
30°	1812.1
32.5°	1493.4
35°	1210.9
37.5°	931.8
40°	668.4
42.5°	436.6
45°	250.5
47.5°	132.6
50°	82.5
52.5°	57.3
55°	41.0
57.5°	29.6
60°	20.5
62.5°	13.4
65°	9.5
67.5°	8.6
70°	8.1
72.5°	6.2
75°	4.8
77.5°	4.3
80°	3.3
82.5°	2.4
85°	1.4
87.5°	1.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)