

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P792610

Luminaire Tested: LER6D40BD010-EC6DR6040509040-6LBDP1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P792610  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D40BD010-EC6DR6040509040-6LBDP1MW  
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4300.6 lumens  
Efficiency: N/A  
Efficacy: 122.2 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 35.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P792610

CATALOG NUMBER: LER6D40BD010-EC6DR6040509040-6LBDP1MW

### Luminous Intensity Polar Plot

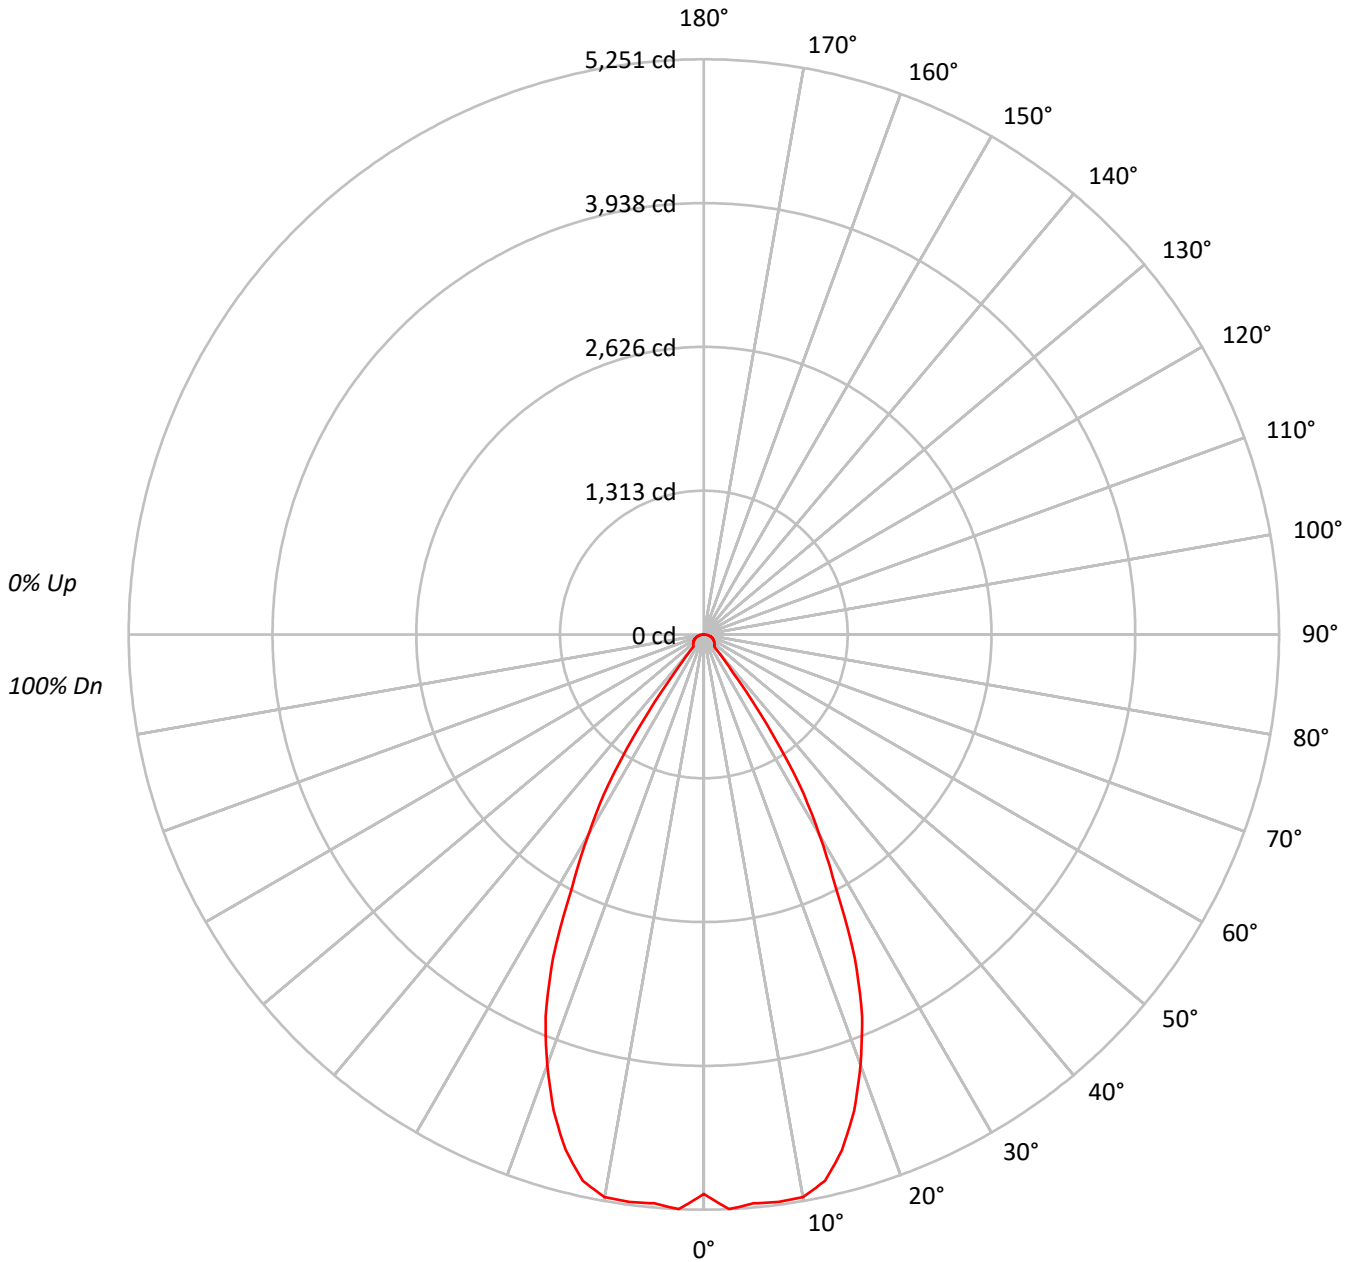



TEST NUMBER: P792610

CATALOG NUMBER: LER6D40BD010-EC6DR6040509040-6LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86	86	86	86
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80	80	80	80
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75	75	75	75
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70	70	70	70
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66	66	66	66
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62	62	62	62
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59	59	59	59
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55	55	55	55
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53	53	53	53

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	558038
5°	571763
10°	578674
15°	551266
20°	486044
25°	393121
30°	265915
35°	133249
40°	21608
45°	21154
50°	21587
55°	21906
60°	22508
65°	23035
70°	23576
75°	23852
80°	23029
85°	19180

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 23852 cd/sqm



TEST NUMBER: P792610

CATALOG NUMBER: LER6D40BD010-EC6DR6040509040-6LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	498.2	11.6
10°-20°	1348.0	31.3
20°-30°	1450.4	33.7
30°-40°	630.4	14.7
40°-50°	105.9	2.5
50°-60°	103.0	2.4
60°-70°	88.1	2.0
70°-80°	58.9	1.4
80°-90°	17.6	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3296.6	76.7
0°-40°	3927.1	91.3
0°-60°	4135.9	96.2
0°-90°	4300.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4300.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5107	
5°	5213	498
15°	4874	1348
25°	3261	1450
35°	999	630
45°	137	106
55°	115	103
65°	89	88
75°	56	59
85°	15	18
90°	0	



TEST NUMBER: P792610

CATALOG NUMBER: LER6D40BD010-EC6DR6040509040-6LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	5107.4
2.5°	5251.0
5°	5213.1
7.5°	5225.1
10°	5215.8
12.5°	5108.1
15°	4873.5
17.5°	4558.4
20°	4180.2
22.5°	3775.4
25°	3260.9
27.5°	2608.2
30°	2107.7
32.5°	1624.5
35°	999.0
37.5°	427.4
40°	151.5
42.5°	139.6
45°	136.9
47.5°	132.3
50°	127.0
52.5°	121.0
55°	115.0
57.5°	109.0
60°	103.0
62.5°	96.4
65°	89.1
67.5°	81.8
70°	73.8
72.5°	65.1
75°	56.5
77.5°	46.5
80°	36.6
82.5°	25.9
85°	15.3
87.5°	5.3
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)