

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P793154

Luminaire Tested: LER6D45BD010-EC6DR7040509024-6LBDP1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P793154  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D45BD010-EC6DR7040509024-6LBDP1MW  
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 3313.0 lumens  
Efficiency: N/A  
Efficacy: 85.6 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 38.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P793154  
CATALOG NUMBER: LER6D45BD010-EC6DR7040509024-6LBDP1MW

### Luminous Intensity Polar Plot

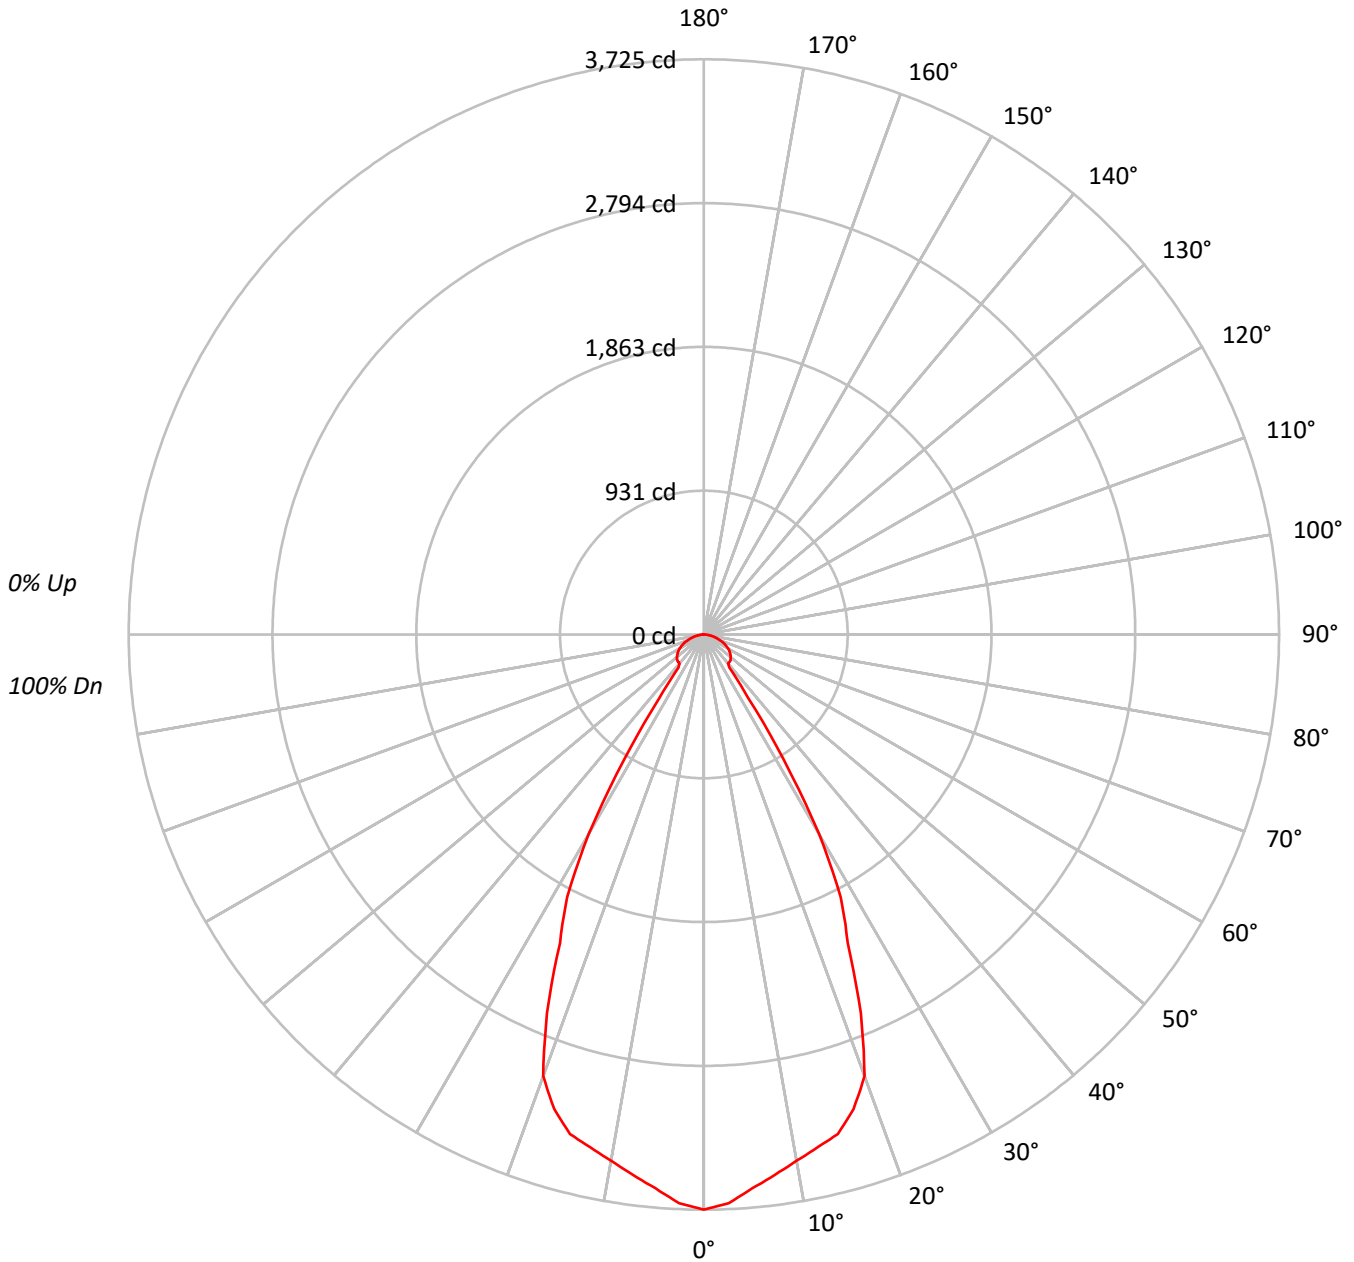



TEST NUMBER: P793154

CATALOG NUMBER: LER6D45BD010-EC6DR7040509024-6LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	406974
5°	394874
10°	383874
15°	378834
20°	353760
25°	265753
30°	187870
35°	66545
40°	34987
45°	37270
50°	38585
55°	39317
60°	39552
65°	38728
70°	36546
75°	33857
80°	30076
85°	24446

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 57.5°  
 Luminance: 39572 cd/sqm



TEST NUMBER: P793154

CATALOG NUMBER: LER6D45BD010-EC6DR7040509024-6LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	339.6	10.3
10°-20°	931.5	28.1
20°-30°	1025.9	31.0
30°-40°	392.0	11.8
40°-50°	185.1	5.6
50°-60°	184.0	5.6
60°-70°	147.3	4.4
70°-80°	84.7	2.6
80°-90°	23.0	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2297.0	69.3
0°-40°	2688.9	81.2
0°-60°	3058.0	92.3
0°-90°	3313.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3313.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3725	
5°	3600	340
15°	3349	931
25°	2204	1026
35°	499	392
45°	241	185
55°	206	184
65°	150	147
75°	80	85
85°	20	23
90°	0	



TEST NUMBER: P793154

CATALOG NUMBER: LER6D45BD010-EC6DR7040509024-6LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3724.8
2.5°	3685.9
5°	3600.3
7.5°	3529.0
10°	3460.0
12.5°	3401.6
15°	3349.1
17.5°	3222.3
20°	3042.5
22.5°	2654.4
25°	2204.4
27.5°	1919.0
30°	1489.1
32.5°	961.9
35°	498.9
37.5°	269.5
40°	245.3
42.5°	243.6
45°	241.2
47.5°	235.9
50°	227.0
52.5°	217.0
55°	206.4
57.5°	194.6
60°	181.0
62.5°	165.7
65°	149.8
67.5°	132.1
70°	114.4
72.5°	96.7
75°	80.2
77.5°	63.1
80°	47.8
82.5°	33.6
85°	19.5
87.5°	7.7
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)