

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P793780

Luminaire Tested: LER6D55D010-EC6DR3555659024-6LBS1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P793780  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D55D010-EC6DR3555659024-6LBS1H  
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5609.5 lumens  
Efficiency: N/A  
Efficacy: 96.4 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 58.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P793780  
CATALOG NUMBER: LER6D55D010-EC6DR3555659024-6LBS1H

### Luminous Intensity Polar Plot

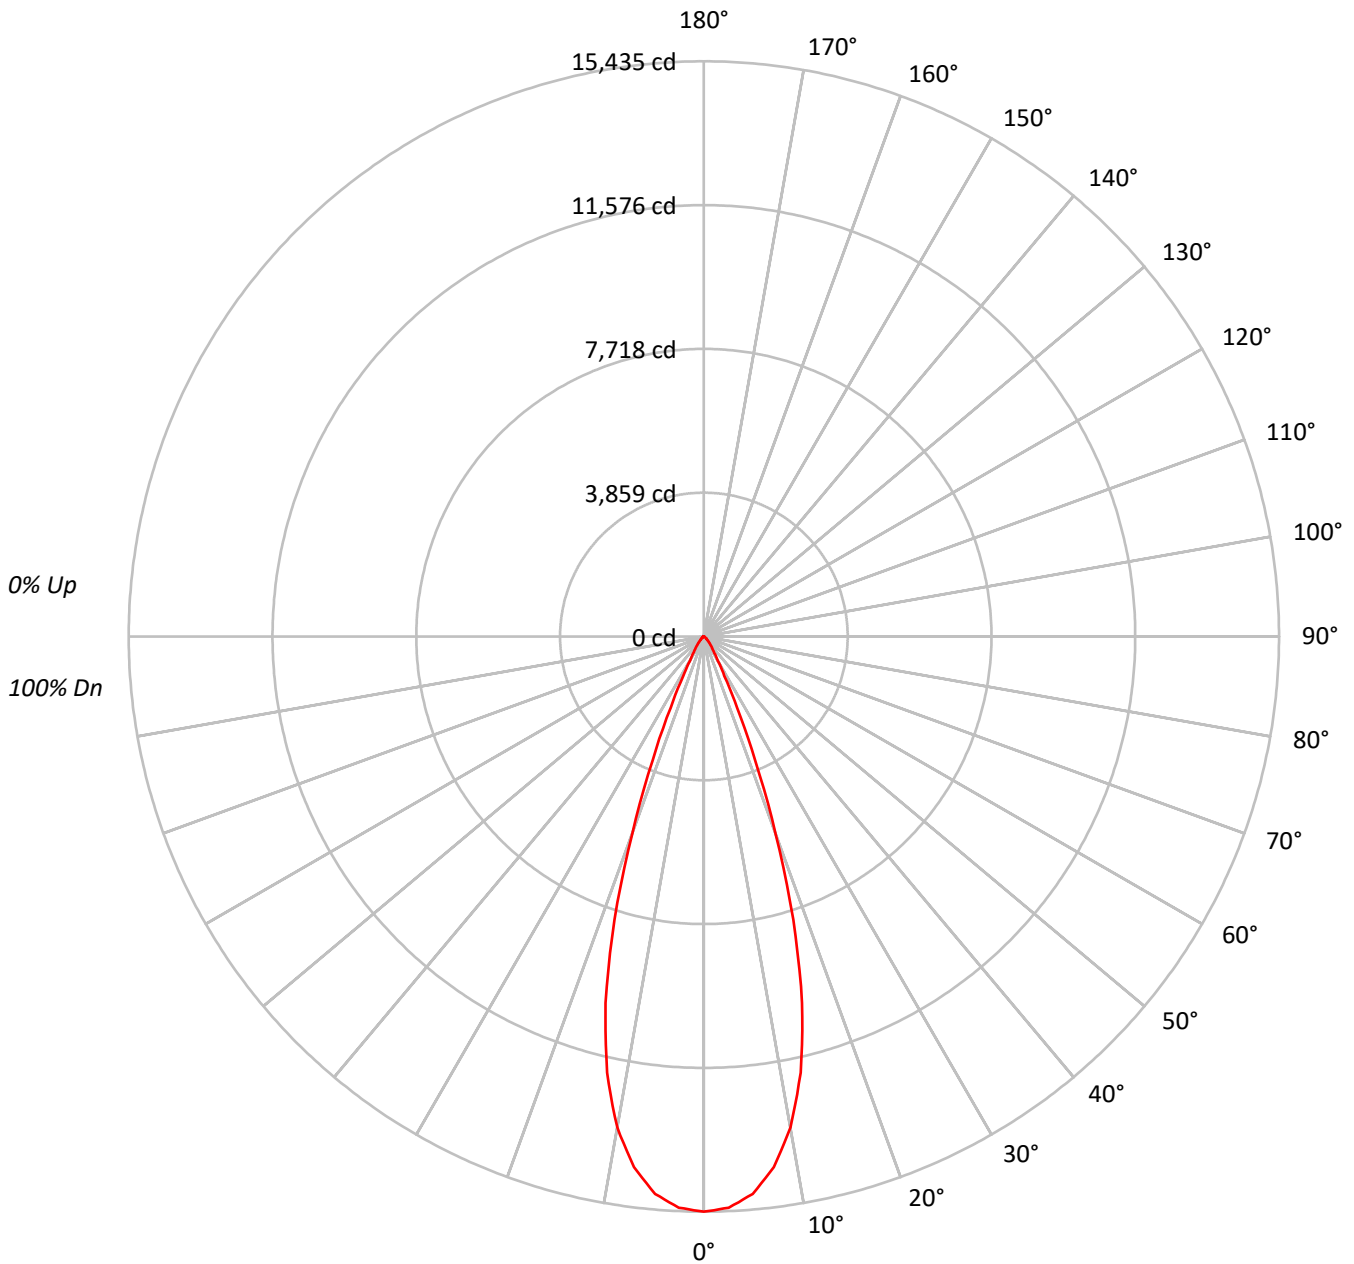



TEST NUMBER: P793780

CATALOG NUMBER: LER6D55D010-EC6DR3555659024-6LBS1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96			96																
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92			92																
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88			88																
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84			84																
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81			81																
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78			78																
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75			75																
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72			72																
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70			70																
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68			68																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1686407
5°	1646784
10°	1484195
15°	1151975
20°	653384
25°	254192
30°	94837
35°	51979
40°	33974
45°	20675
50°	13156
55°	9296
60°	6796
65°	3697
70°	256
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 20675 cd/sqm



TEST NUMBER: P793780

CATALOG NUMBER: LER6D55D010-EC6DR3555659024-6LBS1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1380.9	24.6
10°-20°	2696.1	48.1
20°-30°	1099.6	19.6
30°-40°	263.1	4.7
40°-50°	109.7	2.0
50°-60°	45.4	0.8
60°-70°	14.2	0.3
70°-80°	0.3	0.0
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5176.6	92.3
0°-40°	5439.8	97.0
0°-60°	5594.8	99.7
0°-90°	5609.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5609.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	15435	
5°	15015	###
15°	10184	2696
25°	2108	1100
35°	390	263
45°	134	110
55°	49	45
65°	14	14
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P793780

CATALOG NUMBER: LER6D55D010-EC6DR3555659024-6LBS1H

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	15434.7
2.5°	15342.2
5°	15014.7
7.5°	14361.5
10°	13377.6
12.5°	11992.1
15°	10184.1
17.5°	7972.8
20°	5619.4
22.5°	3583.2
25°	2108.5
27.5°	1191.9
30°	751.7
32.5°	527.8
35°	389.7
37.5°	301.3
40°	238.2
42.5°	183.5
45°	133.8
47.5°	100.2
50°	77.4
52.5°	61.4
55°	48.8
57.5°	39.6
60°	31.1
62.5°	22.7
65°	14.3
67.5°	5.1
70°	0.8
72.5°	0.8
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.8
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)