

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P794882

Luminaire Tested: LER6D65D010-EC6DR5055659024-6LBDP1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P794882  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D65D010-EC6DR5055659024-6LBDP1MW  
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 50° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6694.8 lumens  
Efficiency: N/A  
Efficacy: 92.0 lumens/watt  
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 72.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P794882

CATALOG NUMBER: LER6D65D010-EC6DR5055659024-6LBDP1MW

### Luminous Intensity Polar Plot

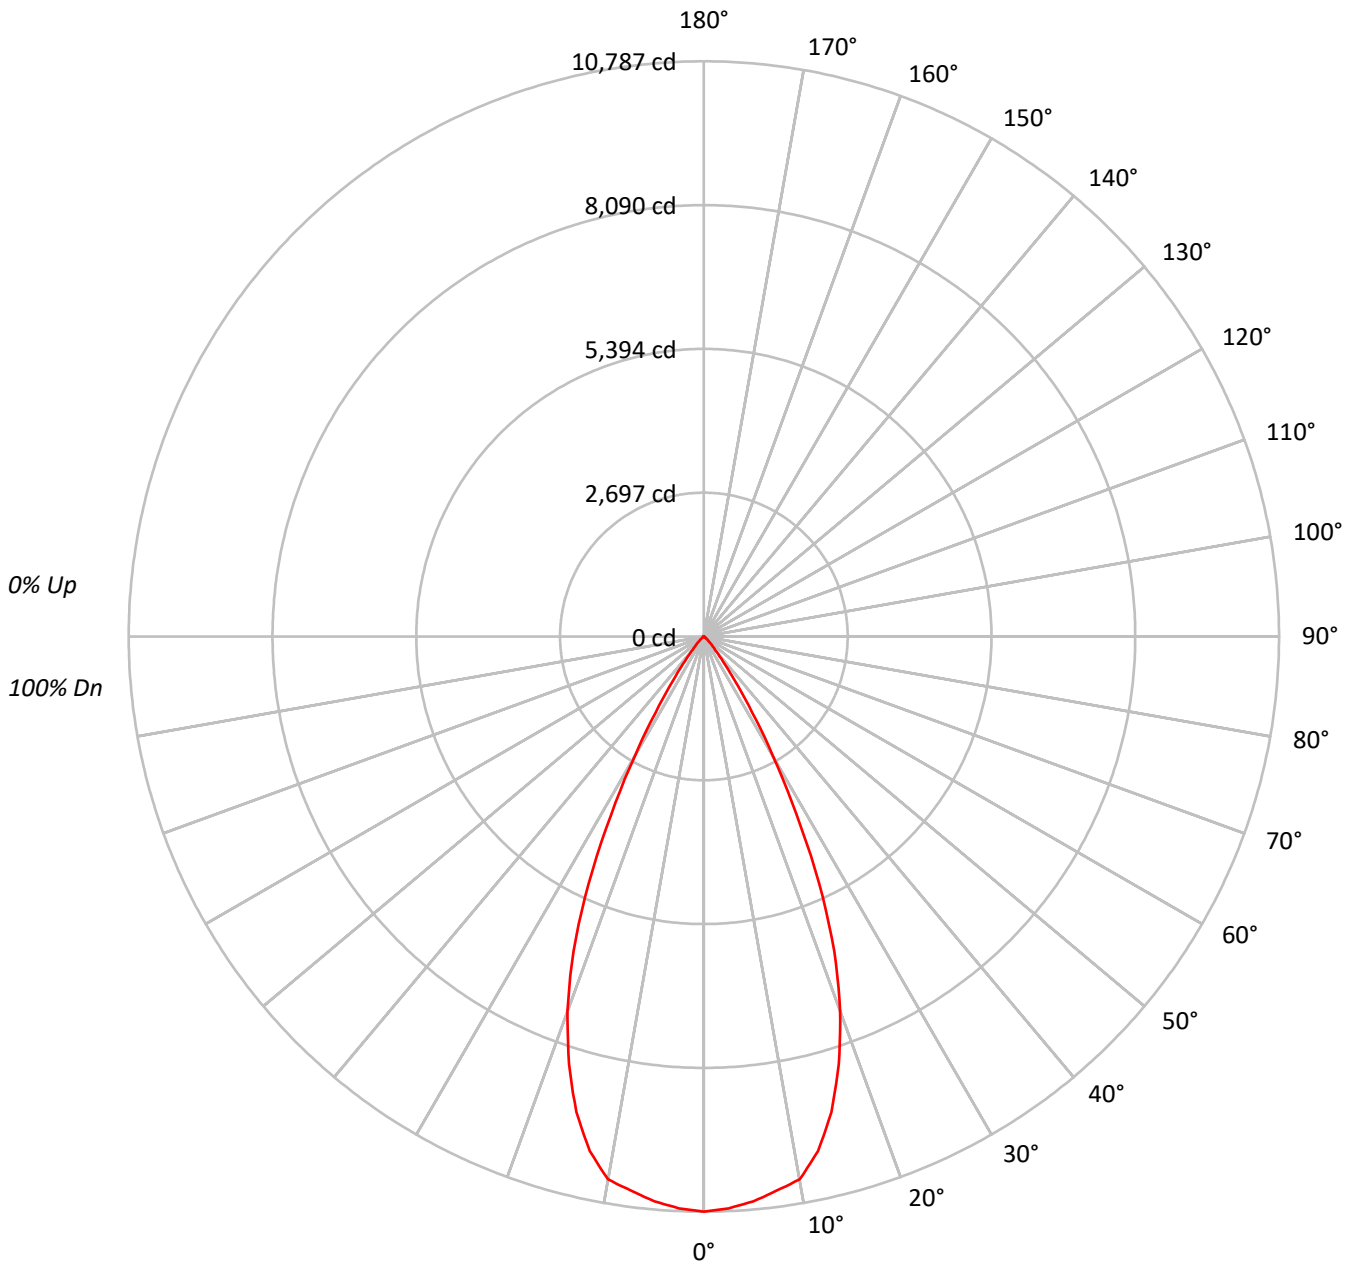



TEST NUMBER: P794882

CATALOG NUMBER: LER6D65D010-EC6DR5055659024-6LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20																		
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	100	100	100	100	100																	
	1	114	112	109	107	112	110	108	106	106	104	102	102	101	99	98	97	97	95	95	95	95	95	95	95	95	95	95	95																	
	2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90	90	90	90	90	90	90	90	90	90	90																	
	3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85	85	85	85	85	85	85	85	85	85	85																	
	4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80	80	80	80	80	80	80	80	80	80	80																	
	5	96	89	84	80	95	88	83	79	86	82	79	85	81	78	83	80	77	76	76	76	76	76	76	76	76	76	76	76																	
	6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	74	72	72	72	72	72	72	72	72	72	72	72																	
	7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69	69	69	69	69	69	69	69	69	69	69																	
	8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65	65	65	65	65	65	65	65	65	65	65																	
	9	81	73	68	64	80	72	67	64	71	67	64	71	67	64	70	66	63	62	62	62	62	62	62	62	62	62	62	62																	
	10	78	70	64	61	77	69	64	61	68	64	61	68	64	61	67	63	60	59	59	59	59	59	59	59	59	59	59	59																	

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1178596
5°	1166240
10°	1147040
15°	1044470
20°	869116
25°	616945
30°	326549
35°	133076
40°	49421
45°	22621
50°	9281
55°	4858
60°	2382
65°	698
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 22621 cd/sqm



TEST NUMBER: P794882

CATALOG NUMBER: LER6D65D010-EC6DR5055659024-6LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1005.1	15.0
10°-20°	2540.0	37.9
20°-30°	2281.6	34.1
30°-40°	714.4	10.7
40°-50°	125.1	1.9
50°-60°	24.9	0.4
60°-70°	3.8	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5826.7	87.0
0°-40°	6541.0	97.7
0°-60°	6691.1	99.9
0°-90°	6694.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6694.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	10787	
5°	10633	###
15°	9234	2540
25°	5118	2282
35°	998	714
45°	146	125
55°	26	25
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P794882

CATALOG NUMBER: LER6D65D010-EC6DR5055659024-6LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	10787.0
2.5°	10733.4
5°	10633.3
7.5°	10480.6
10°	10338.7
12.5°	9883.9
15°	9233.7
17.5°	8407.9
20°	7474.8
22.5°	6395.3
25°	5117.5
27.5°	3762.4
30°	2588.3
32.5°	1685.2
35°	997.7
37.5°	573.0
40°	346.5
42.5°	225.5
45°	146.4
47.5°	89.1
50°	54.6
52.5°	37.3
55°	25.5
57.5°	17.3
60°	10.9
62.5°	6.4
65°	2.7
67.5°	0.9
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)