

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205070

Luminaire Tested: **LSR6B10D010BZ EC6B10209024 6LBMLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205070
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B10D010BZ EC6B10209024 6LBMLI1
Description: PORTFOLIO 6IN CYLINDER
MEDIUM DISTRIBUTION WITH SPECULAR CLEAR TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 687.1 lumens
Efficiency: N/A
Efficacy: 69.4 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205070

CATALOG NUMBER: LSR6B10D010BZ EC6B10209024 6LBMLI1

Luminous Intensity Polar Plot

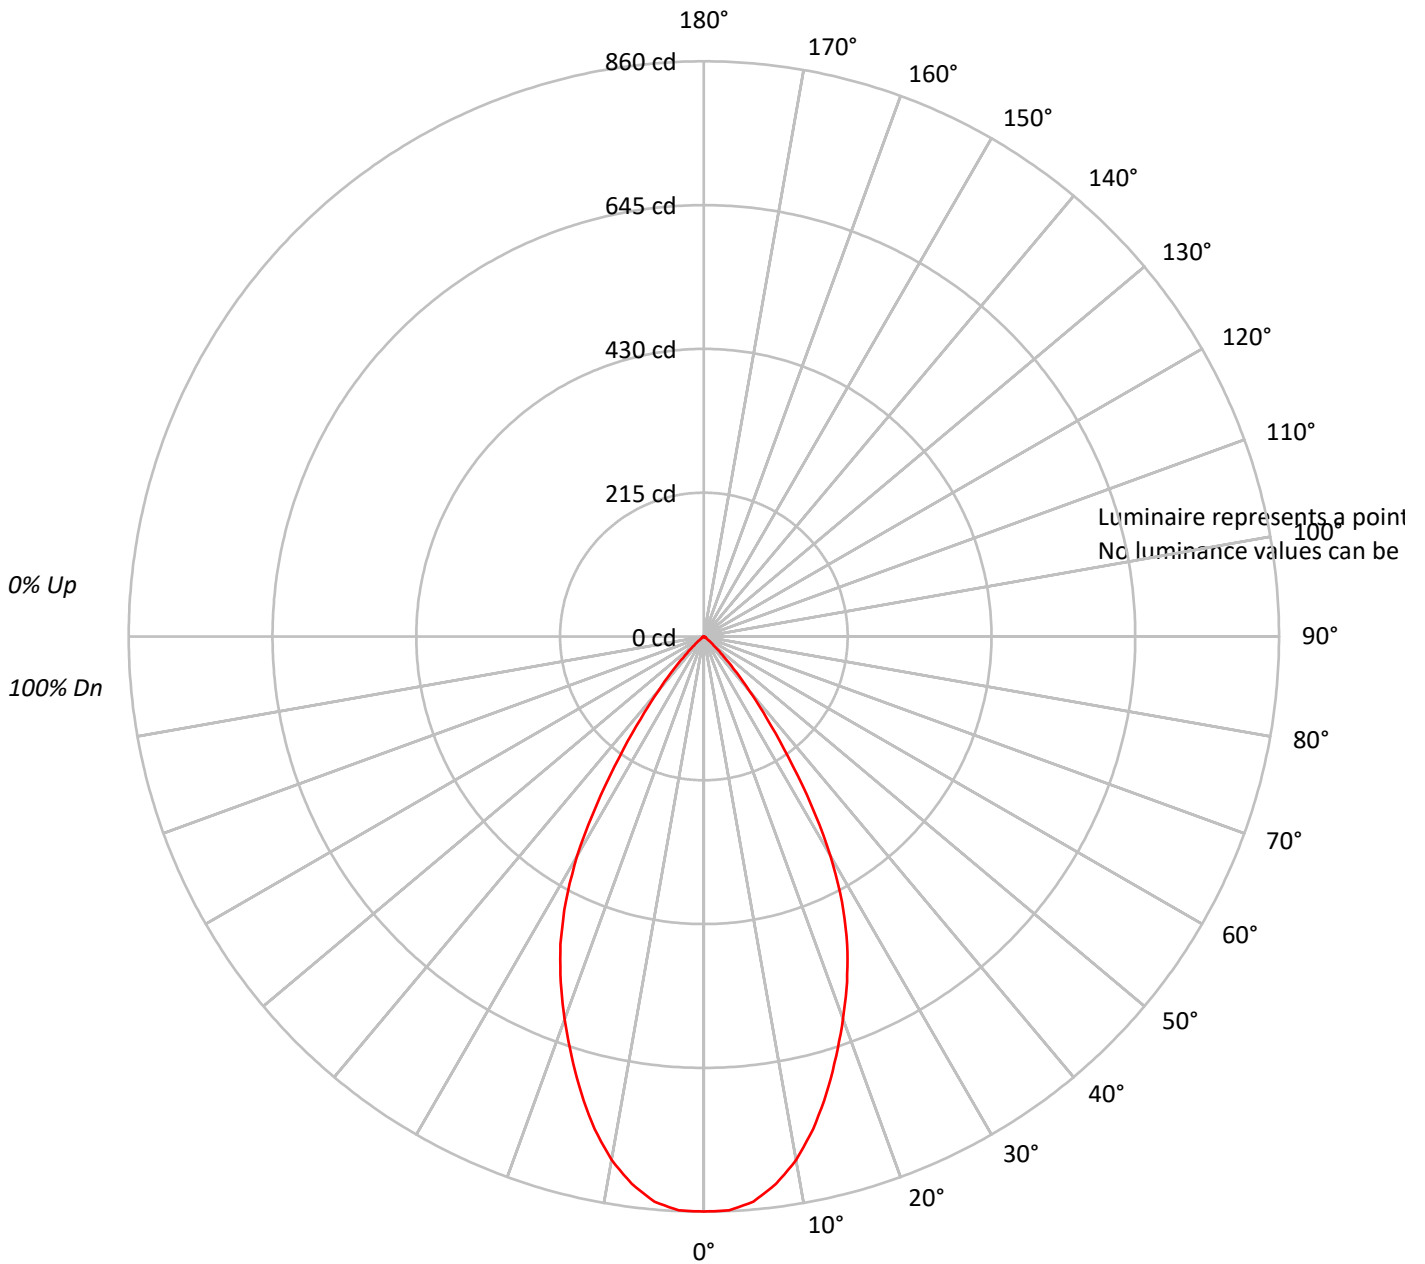



TEST NUMBER: P205070

CATALOG NUMBER: LSR6B10D010BZ EC6B10209024 6LBML11

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94		
2	108	103	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88		
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	85	83	82		
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76		
5	93	85	79	75	91	84	79	75	82	78	74	81	77	73	79	76	73	71		
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67		
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63		
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59		
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55		
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52		

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205070

CATALOG NUMBER: LSR6B10D010BZ EC6B10209024 6LBML11

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.2	11.5
10°-20°	197.2	28.7
20°-30°	229.2	33.4
30°-40°	140.4	20.4
40°-50°	34.9	5.1
50°-60°	4.1	0.6
60°-70°	1.5	0.2
70°-80°	0.6	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	505.6	73.6
0°-40°	646.0	94.0
0°-60°	684.9	99.7
0°-90°	687.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	687.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	860	
5°	848	79
15°	708	197
25°	507	229
35°	220	140
45°	39	35
55°	4	4
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P205070

CATALOG NUMBER: LSR6B10D010BZ EC6B10209024 6LBMLI1

CANDELA DISTRIBUTION (FULL):

	0°
0°	859.8
2.5°	858.9
5°	848.4
7.5°	825.5
10°	794.7
12.5°	754.3
15°	707.7
17.5°	657.6
20°	608.4
22.5°	559.1
25°	507.3
27.5°	447.5
30°	378.9
32.5°	298.9
35°	219.8
37.5°	154.7
40°	105.5
42.5°	65.9
45°	38.7
47.5°	22.0
50°	11.4
52.5°	5.3
55°	3.5
57.5°	2.6
60°	2.6
62.5°	1.8
65°	1.8
67.5°	0.9
70°	0.9
72.5°	0.9
75°	0.9
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)