

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P204353

Luminaire Tested: **LSR6B10D010BZ EC6B10209727 6LBSGPH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P204353  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR6B10D010BZ EC6B10209727 6LBSGPH1  
Description: PORTFOLIO 6IN CYLINDER  
SHALLOW DISTRIBUTION WITH GRAPHITE HAZE TRIM  
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W  
DL3-11.1 W DLE-11.39 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 725.3 lumens  
Efficiency: N/A  
Efficacy: 73.3 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.26  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 9.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P204353

CATALOG NUMBER: LSR6B10D010BZ EC6B10209727 6LBSGPH1

### Luminous Intensity Polar Plot

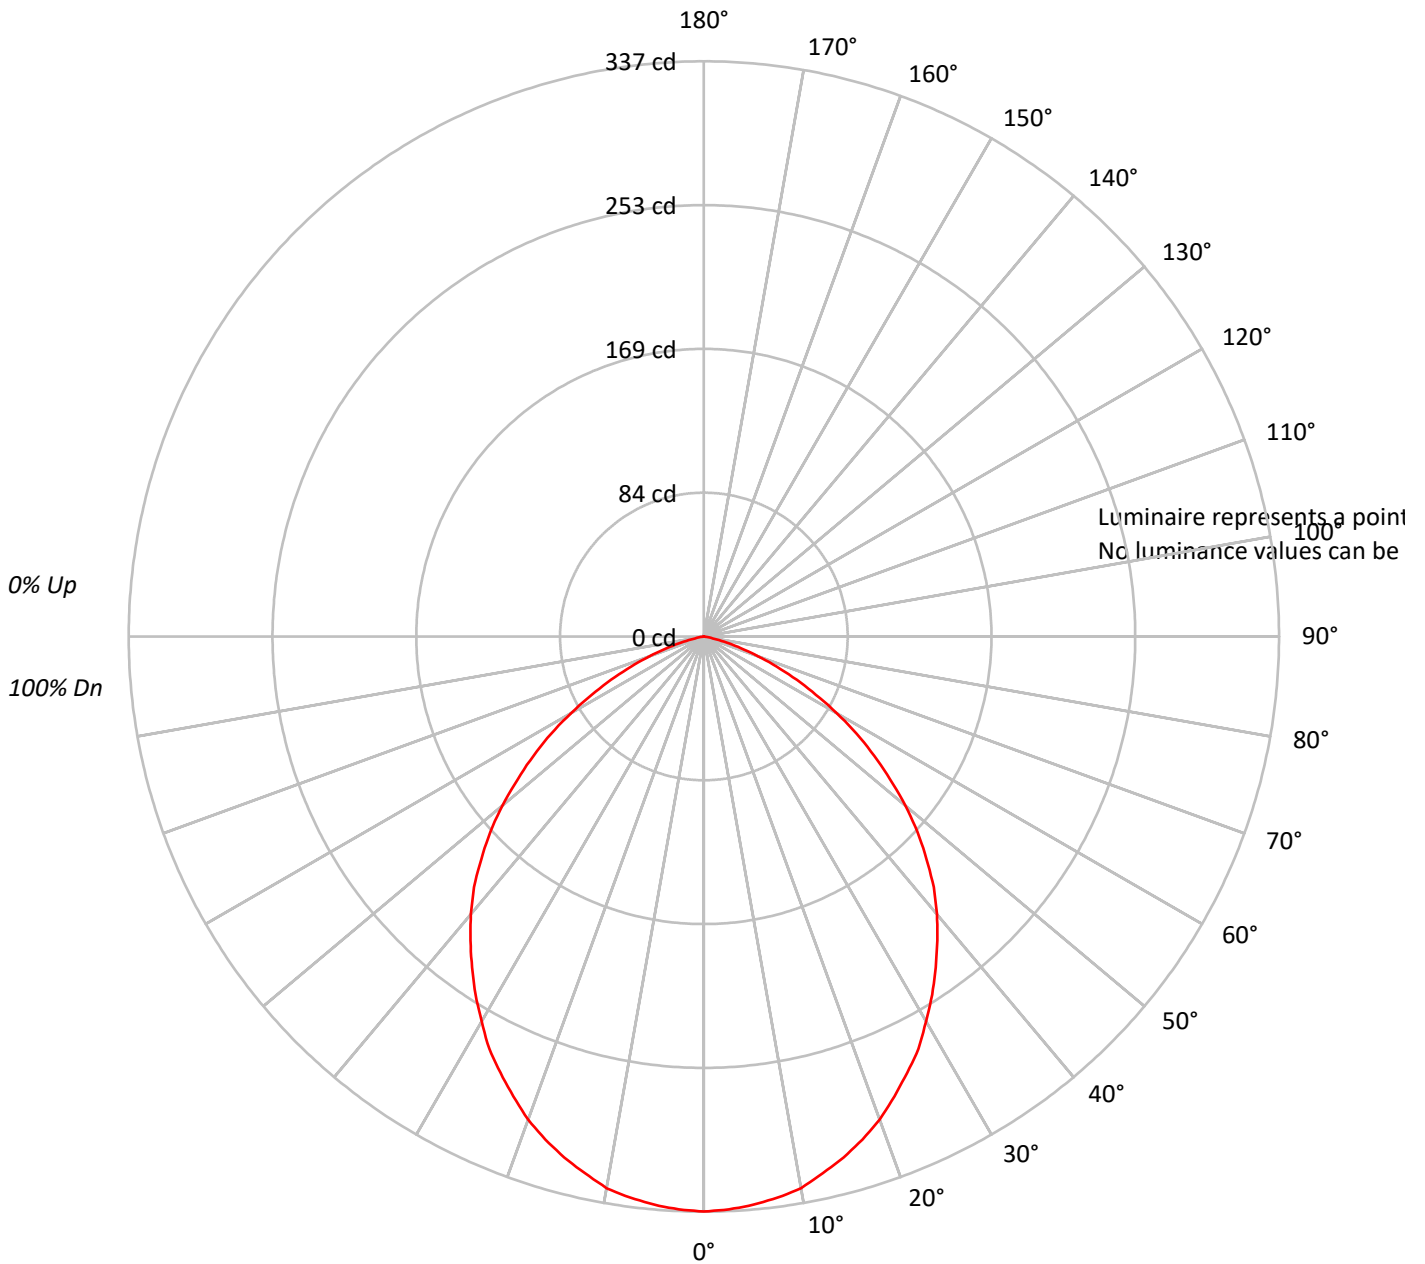



TEST NUMBER: P204353

CATALOG NUMBER: LSR6B10D010BZ EC6B10209727 6LBSGPH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	107	103	100	108	105	102	99	101	98	96	97	95	93	93	92	90	88			88
2	102	95	89	84	100	93	88	83	90	85	82	87	83	80	84	81	78	76			76
3	94	85	78	72	92	83	77	71	80	75	70	78	73	69	75	71	68	66			66
4	87	76	68	62	85	75	67	62	72	66	61	70	65	60	68	63	59	57			57
5	80	68	60	54	78	67	60	54	65	59	53	63	58	53	62	56	52	50			50
6	74	62	54	48	73	61	53	48	59	52	47	58	52	47	56	51	47	45			45
7	69	57	48	43	68	56	48	43	54	47	42	53	47	42	52	46	42	40			40
8	65	52	44	38	63	51	44	38	50	43	38	49	42	38	48	42	38	36			36
9	60	48	40	35	59	47	40	35	46	39	35	45	39	34	44	38	34	32			32
10	57	44	37	32	56	44	36	32	43	36	32	42	36	31	41	35	31	30			30

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P204353

CATALOG NUMBER: LSR6B10D010BZ EC6B10209727 6LBSGPH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	31.7	4.4
10°-20°	89.0	12.3
20°-30°	129.8	17.9
30°-40°	148.1	20.4
40°-50°	142.0	19.6
50°-60°	108.8	15.0
60°-70°	59.7	8.2
70°-80°	15.8	2.2
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	250.6	34.6
0°-40°	398.7	55.0
0°-60°	649.5	89.6
0°-90°	725.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	725.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	337	
5°	334	32
15°	316	89
25°	282	130
35°	237	148
45°	184	142
55°	122	109
65°	60	60
75°	14	16
85°	0	0
90°	0	



TEST NUMBER: P204353

CATALOG NUMBER: LSR6B10D010BZ EC6B10209727 6LBSGPH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	336.9
2.5°	336.0
5°	334.2
7.5°	331.6
10°	328.2
12.5°	322.1
15°	316.0
17.5°	309.0
20°	301.2
22.5°	291.6
25°	282.0
27.5°	272.4
30°	260.3
32.5°	248.9
35°	236.8
37.5°	224.6
40°	212.4
42.5°	199.3
45°	184.5
47.5°	169.7
50°	154.1
52.5°	137.5
55°	121.9
57.5°	106.2
60°	89.7
62.5°	74.0
65°	60.1
67.5°	46.1
70°	33.9
72.5°	22.6
75°	13.9
77.5°	6.1
80°	1.7
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)