

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205494

Luminaire Tested: **LSR6B15D010BZ EC6B10209727 6LBMGPH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P205494  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR6B15D010BZ EC6B10209727 6LBMGPH1  
Description: PORTFOLIO 6IN CYLINDER  
MEDIUM DISTRIBUTION WITH GRAPHITE HAZE TRIM  
WATTAGE D010TR-14.39 W DE010-14.29 W D5LT-14.34 W DMX-14.46 W DL2-15.8 W  
DL3-15.28 W DLE-15.432 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 584.2 lumens  
Efficiency: N/A  
Efficacy: 40.9 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P205494

CATALOG NUMBER: LSR6B15D010BZ EC6B10209727 6LBMGPH1

### Luminous Intensity Polar Plot

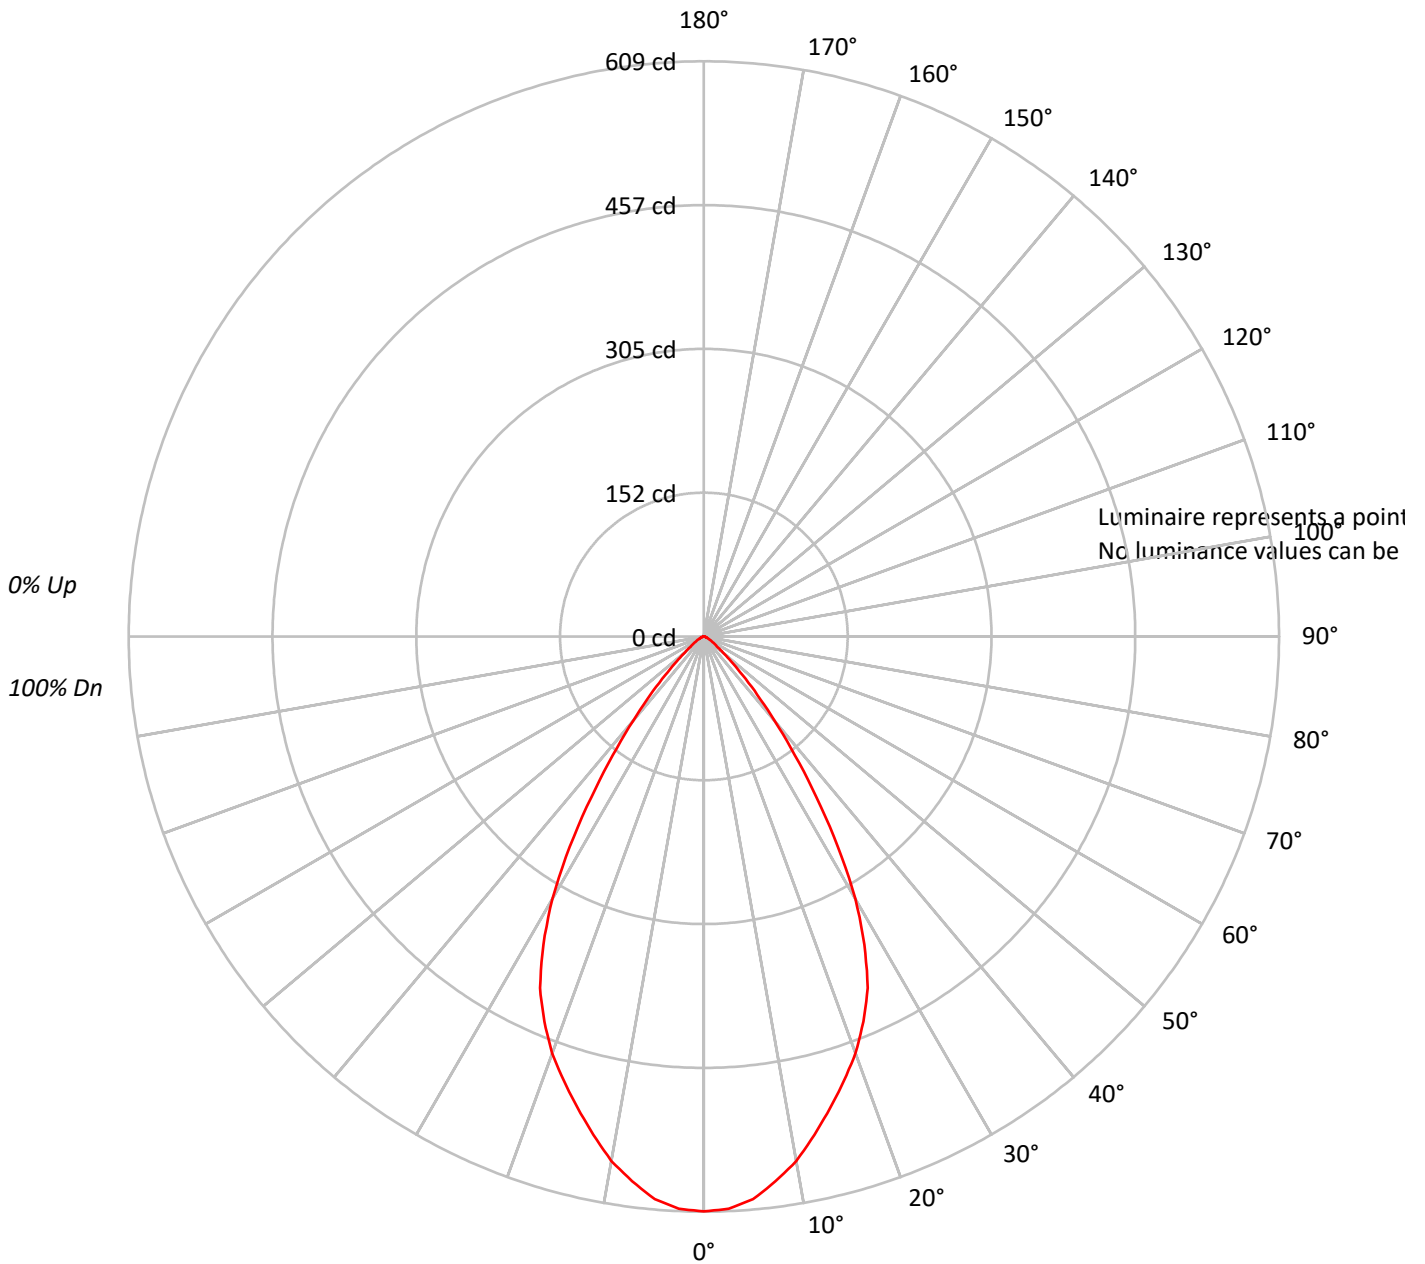



TEST NUMBER: P205494

CATALOG NUMBER: LSR6B15D010BZ EC6B10209727 6LBMGPH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93																			
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86																			
3	102	95	90	85	99	93	89	85	91	87	83	88	85	82	86	83	81	79																			
4	96	88	82	78	94	87	82	77	85	80	77	83	79	76	81	78	75	73																			
5	91	82	76	72	89	81	76	71	79	74	71	78	73	70	76	72	69	68																			
6	86	77	71	66	85	76	70	66	74	69	65	73	68	65	72	68	64	63																			
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59																			
8	77	68	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55																			
9	74	64	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51																			
10	70	60	54	50	69	59	54	50	59	53	50	58	53	49	57	53	49	48																			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P205494

CATALOG NUMBER: LSR6B15D010BZ EC6B10209727 6LBMGPH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	55.9	9.6
10°-20°	145.1	24.8
20°-30°	184.9	31.6
30°-40°	130.7	22.4
40°-50°	47.7	8.2
50°-60°	13.2	2.3
60°-70°	4.8	0.8
70°-80°	1.7	0.3
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	385.9	66.1
0°-40°	516.6	88.4
0°-60°	577.5	98.9
0°-90°	584.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	584.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	609	
5°	598	56
15°	517	145
25°	410	185
35°	208	131
45°	58	48
55°	14	13
65°	5	5
75°	1	2
85°	0	0
90°	0	



TEST NUMBER: P205494

CATALOG NUMBER: LSR6B15D010BZ EC6B10209727 6LBMGPH1

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	608.7
2.5°	606.4
5°	598.1
7.5°	581.6
10°	563.9
12.5°	540.3
15°	516.7
17.5°	493.1
20°	469.5
22.5°	441.2
25°	410.5
27.5°	368.1
30°	320.9
32.5°	264.2
35°	207.6
37.5°	158.1
40°	115.6
42.5°	83.8
45°	57.8
47.5°	38.9
50°	26.0
52.5°	17.7
55°	14.2
57.5°	10.6
60°	8.3
62.5°	5.9
65°	4.7
67.5°	3.5
70°	2.4
72.5°	2.4
75°	1.2
77.5°	1.2
80°	1.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)