

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P202859

Luminaire Tested: **LSR6B40D010BZ EC6B30509050 6LBWWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202859
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR6B40D010BZ EC6B30509050 6LBWWH1
Description: PORTFOLIO 6IN CYLINDER
WIDE DISTRIBUTION WITH WHEAT TRIM
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57
W DL3-44.71 W DLE-39.33 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3328.7 lumens
Efficiency: N/A
Efficacy: 79.6 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.18
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202859

CATALOG NUMBER: LSR6B40D010BZ EC6B30509050 6LBWWH1

Luminous Intensity Polar Plot

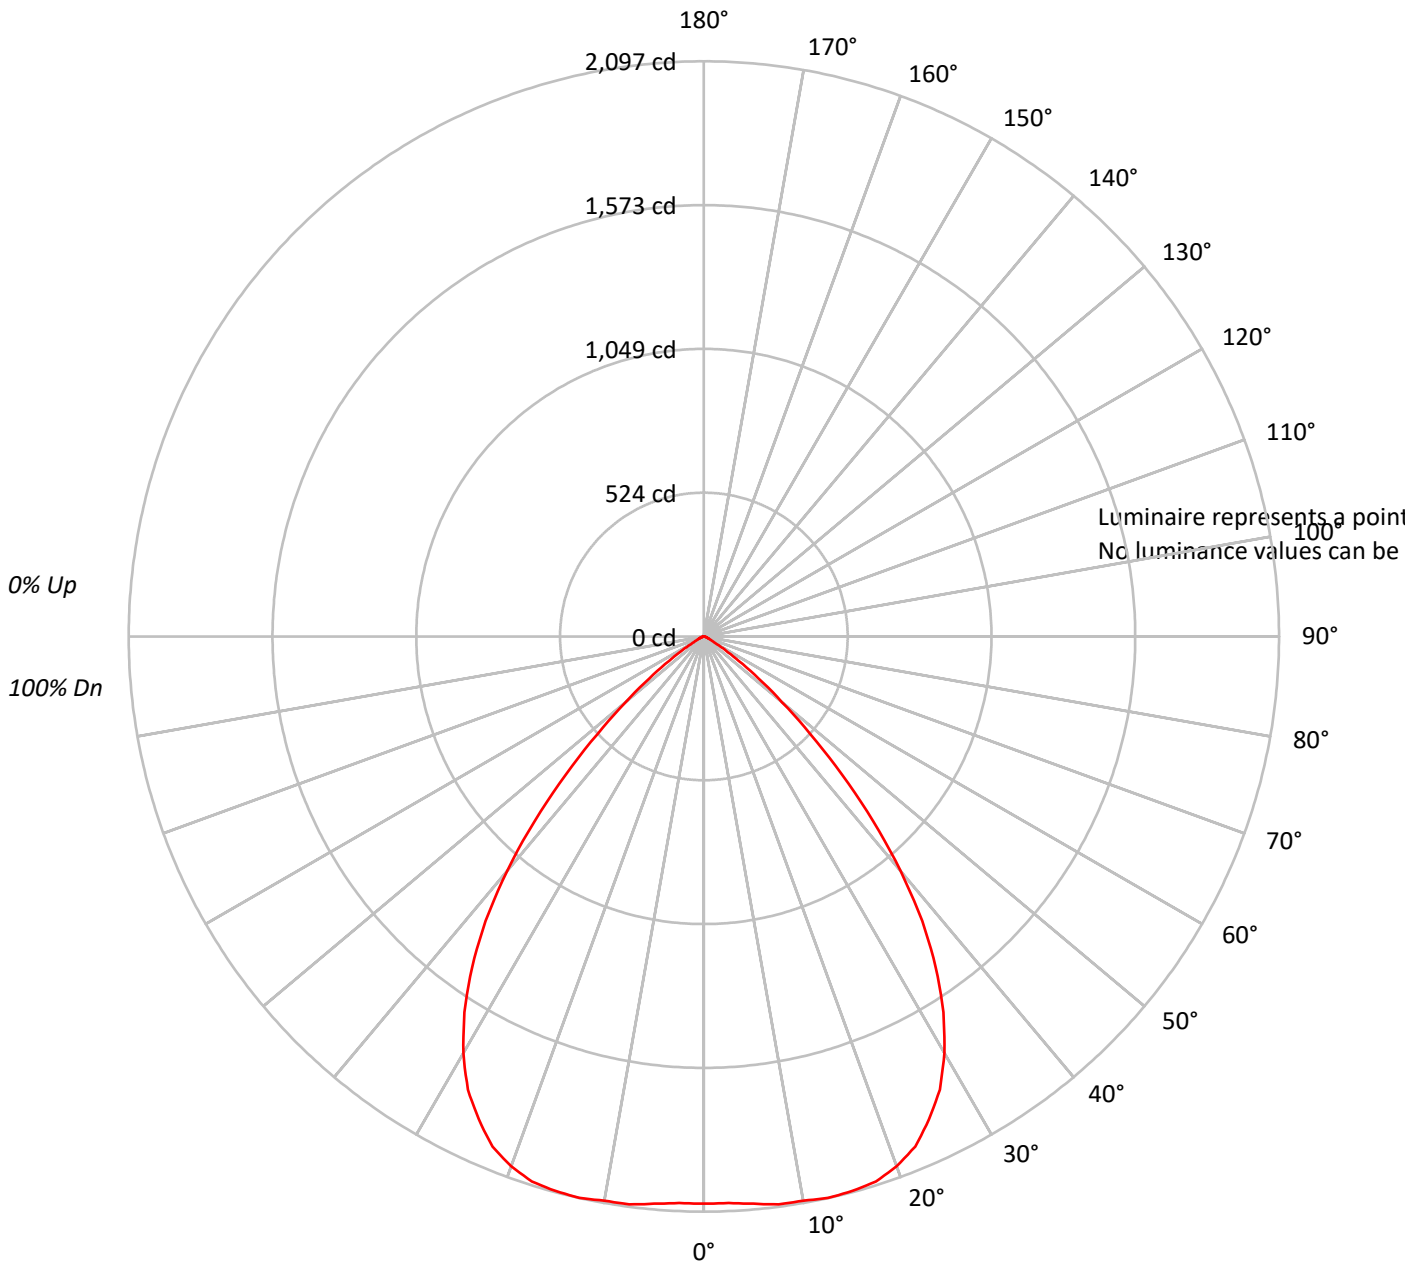



TEST NUMBER: P202859

CATALOG NUMBER: LSR6B40D010BZ EC6B30509050 6LBWWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92																			
2	106	100	96	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83																			
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75																			
4	93	84	78	73	91	83	77	72	81	76	71	79	74	71	77	73	70	68																			
5	87	77	71	66	85	76	70	65	75	69	65	73	68	64	71	67	63	62																			
6	82	71	64	59	80	71	64	59	69	63	59	67	62	58	66	61	58	56																			
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51																			
8	72	61	54	49	71	61	54	49	59	53	49	58	53	49	57	52	49	47																			
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43																			
10	64	53	46	42	63	53	46	42	52	46	42	51	45	42	50	45	41	40																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202859

CATALOG NUMBER: LSR6B40D010BZ EC6B30509050 6LBWWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	198.7	6.0
10°-20°	591.0	17.8
20°-30°	889.6	26.7
30°-40°	909.6	27.3
40°-50°	552.4	16.6
50°-60°	155.5	4.7
60°-70°	23.6	0.7
70°-80°	7.7	0.2
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1679.3	50.4
0°-40°	2588.8	77.8
0°-60°	3296.8	99.0
0°-90°	3328.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3328.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2068	
5°	2076	199
15°	2093	591
25°	1942	890
35°	1474	910
45°	710	552
55°	154	156
65°	21	24
75°	8	8
85°	0	1
90°	0	



TEST NUMBER: P202859

CATALOG NUMBER: LSR6B40D010BZ EC6B30509050 6LBWWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2067.5
2.5°	2067.5
5°	2075.8
7.5°	2088.4
10°	2088.4
12.5°	2096.7
15°	2092.6
17.5°	2084.2
20°	2055.0
22.5°	2013.2
25°	1942.2
27.5°	1862.8
30°	1754.2
32.5°	1624.8
35°	1474.4
37.5°	1307.3
40°	1115.2
42.5°	914.7
45°	710.0
47.5°	526.3
50°	371.7
52.5°	250.6
55°	154.5
57.5°	91.9
60°	45.9
62.5°	29.2
65°	20.9
67.5°	16.7
70°	12.5
72.5°	8.4
75°	8.4
77.5°	4.2
80°	4.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)