

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203210

Luminaire Tested: **LE_6B10D010 EC6B10208027 6LBMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203210
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B10D010 EC6B10208027 6LBMH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 929.0 lumens
Efficiency: N/A
Efficacy: 93.8 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.93
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203210

CATALOG NUMBER: LE_6B10D010 EC6B10208027 6LBMH1

Luminous Intensity Polar Plot

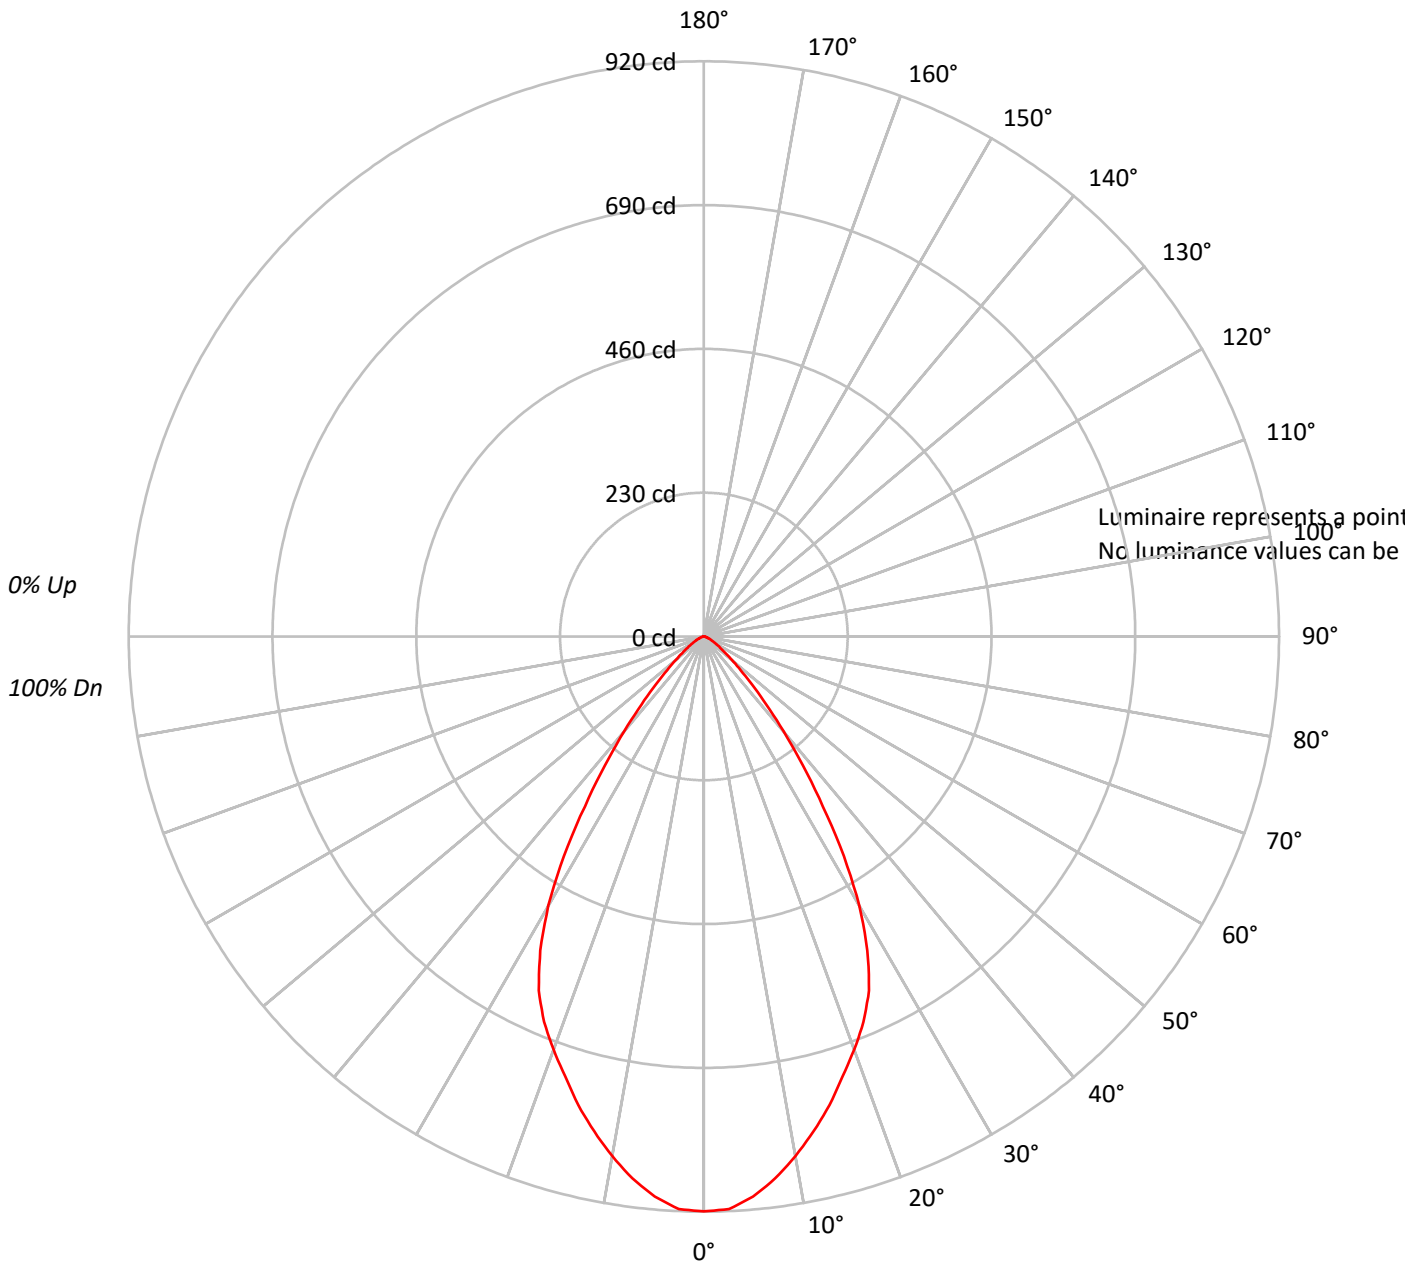




TEST NUMBER: P203210

CATALOG NUMBER: LE_6B10D010 EC6B10208027 6LBMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92	92	92	92
2	107	102	97	93	105	100	96	92	97	93	90	94	91	88	91	89	87	85	85	85	85
3	101	94	88	84	99	92	87	84	90	86	82	87	84	81	85	82	80	78	78	78	78
4	95	87	81	76	93	86	80	76	84	79	75	82	78	74	80	76	73	72	72	72	72
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66	66	66	66
6	85	75	69	64	83	75	69	64	73	68	64	72	67	63	70	66	63	61	61	61	61
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57	57	57	57
8	76	66	60	55	75	65	59	55	64	59	55	63	58	55	62	58	54	53	53	53	53
9	72	62	56	51	71	61	55	51	60	55	51	60	55	51	59	54	51	49	49	49	49
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	55	51	48	46	46	46	46

AVERAGE LUMINANCE (cd/sqm):

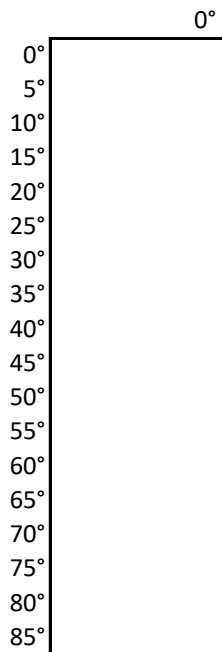



TEST NUMBER: P203210

CATALOG NUMBER: LE_6B10D010 EC6B10208027 6LBMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	84.1	9.0
10°-20°	217.5	23.4
20°-30°	281.8	30.3
30°-40°	209.2	22.5
40°-50°	88.3	9.5
50°-60°	31.4	3.4
60°-70°	12.1	1.3
70°-80°	4.2	0.4
80°-90°	0.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	583.3	62.8
0°-40°	792.6	85.3
0°-60°	912.2	98.2
0°-90°	929.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	929.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	920	
5°	900	84
15°	776	217
25°	625	282
35°	332	209
45°	109	88
55°	33	31
65°	12	12
75°	4	4
85°	0	1
90°	0	



TEST NUMBER: P203210

CATALOG NUMBER: LE_6B10D010 EC6B10208027 6LBMH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	919.5
2.5°	916.8
5°	899.5
7.5°	874.4
10°	843.9
12.5°	810.6
15°	776.1
17.5°	737.6
20°	703.1
22.5°	667.4
25°	624.9
27.5°	566.5
30°	497.5
32.5°	416.6
35°	331.8
37.5°	260.0
40°	197.6
42.5°	147.2
45°	108.8
47.5°	79.6
50°	58.4
52.5°	43.8
55°	33.1
57.5°	25.2
60°	19.9
62.5°	14.6
65°	12.0
67.5°	9.2
70°	6.6
72.5°	5.2
75°	4.0
77.5°	2.6
80°	1.4
82.5°	1.4
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)