

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203625

Luminaire Tested: **LE_6B10D010 EC6B10208040 6LBNH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203625
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B10D010 EC6B10208040 6LBNH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
NARROW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-10.05 W DE010-10.58 W D5LT-10.2 W DMX-10.6 W DL2-11.8 W
DL3-11.1 W DLE-11.39 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 865.8 lumens
Efficiency: N/A
Efficacy: 87.5 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.84
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203625

CATALOG NUMBER: LE_6B10D010 EC6B10208040 6LBNH1

Luminous Intensity Polar Plot

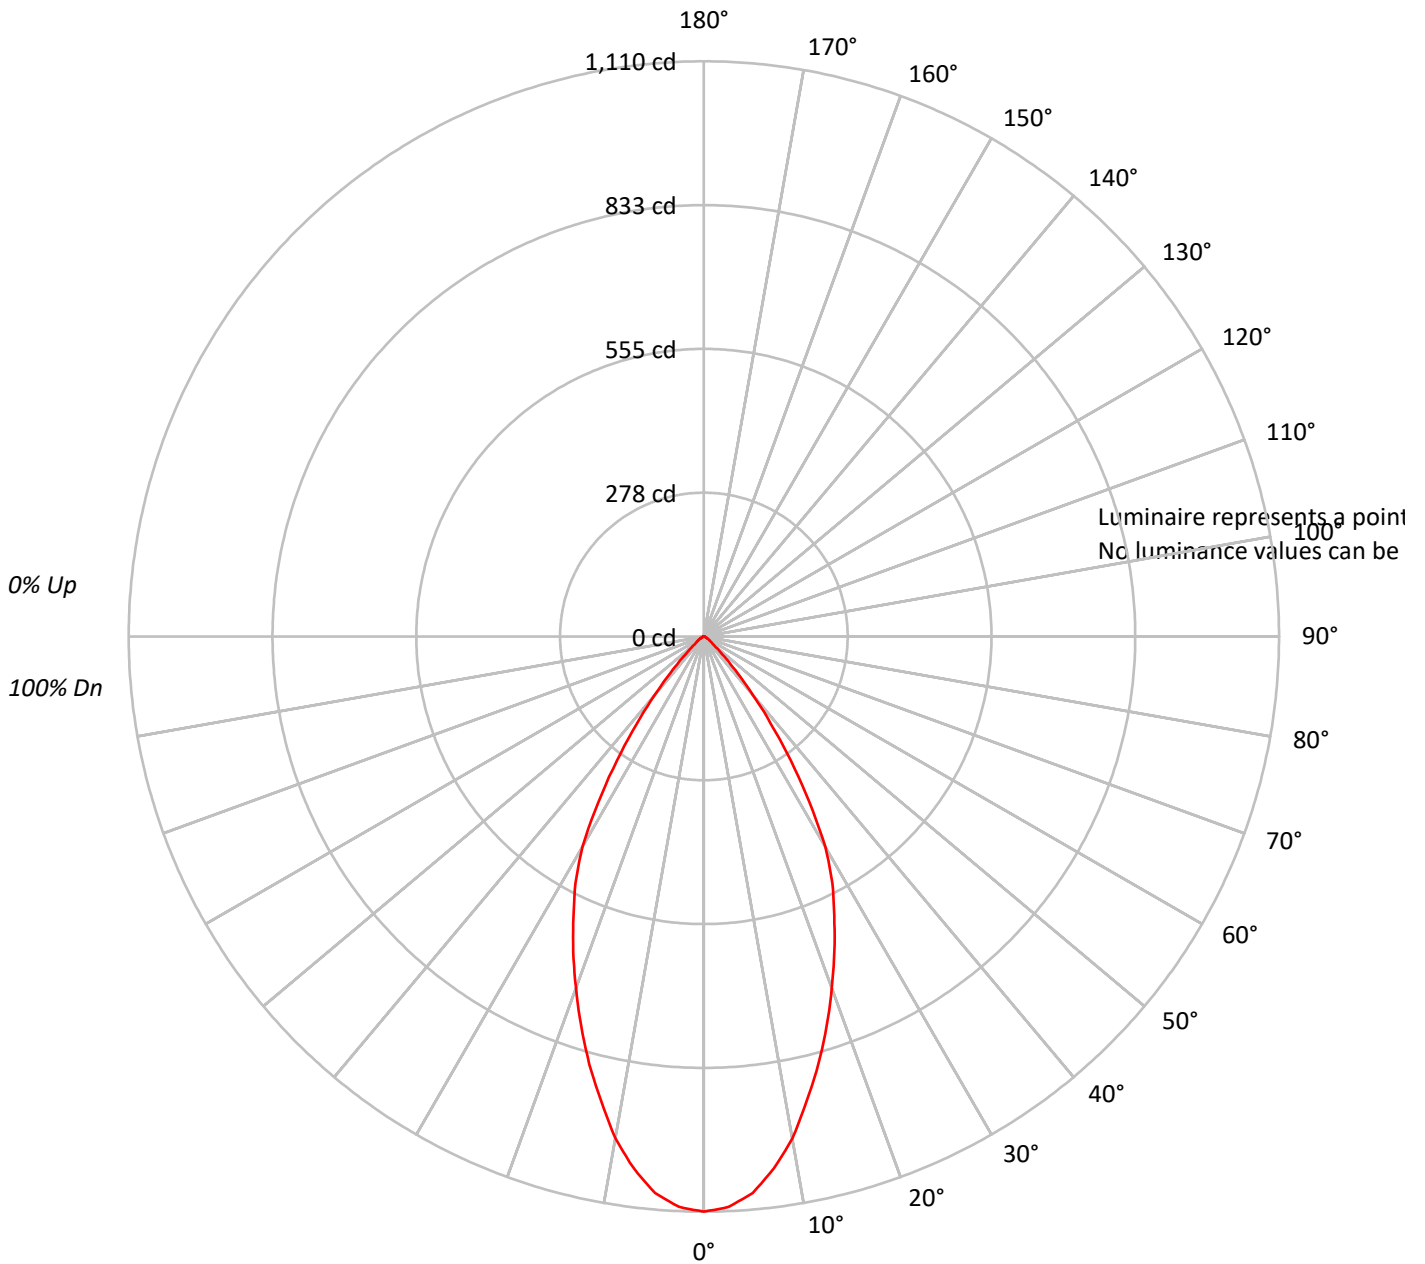



TEST NUMBER: P203625

CATALOG NUMBER: LE_6B10D010 EC6B10208040 6LBNH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93		
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87		
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81		
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75		
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70		
6	88	79	73	69	86	78	72	68	77	72	68	75	71	67	74	70	67	65		
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61		
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58		
9	76	66	60	56	75	66	60	56	65	59	56	64	59	56	63	59	55	54		
10	72	62	57	53	71	62	57	53	61	56	53	60	56	52	60	55	52	51		

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203625

CATALOG NUMBER: LE_6B10D010 EC6B10208040 6LBNH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	99.8	11.5
10°-20°	238.0	27.5
20°-30°	272.7	31.5
30°-40°	183.2	21.2
40°-50°	52.3	6.0
50°-60°	12.8	1.5
60°-70°	4.9	0.6
70°-80°	1.9	0.2
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	610.5	70.5
0°-40°	793.7	91.7
0°-60°	858.8	99.2
0°-90°	865.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	865.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1110	
5°	1078	100
15°	854	238
25°	595	273
35°	292	183
45°	60	52
55°	14	13
65°	5	5
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P203625

CATALOG NUMBER: LE_6B10D010 EC6B10208040 6LBNH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1109.9
2.5°	1102.0
5°	1078.2
7.5°	1035.6
10°	983.5
12.5°	917.2
15°	854.1
17.5°	787.8
20°	721.5
22.5°	658.4
25°	595.1
27.5°	536.8
30°	468.9
32.5°	378.9
35°	292.1
37.5°	213.1
40°	146.9
42.5°	96.2
45°	60.0
47.5°	36.2
50°	22.1
52.5°	17.4
55°	14.2
57.5°	11.0
60°	7.9
62.5°	6.4
65°	4.8
67.5°	3.1
70°	3.1
72.5°	1.6
75°	1.6
77.5°	1.6
80°	1.6
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)