

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P844313

Luminaire Tested: **LD6C30DE010B35 EU6C30B35 6LBNLI**

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-08  
Report Number: P844313  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205310)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD6C30DE010B35 EU6C30B35 6LBNLI  
Description:  
Light Source: -  
Ballast/Driver:

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2278.2 lumens  
Efficiency: N/A  
Efficacy: 66.8 lumens/watt  
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.58  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 34.1  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P844313

CATALOG NUMBER: LD6C30DE010B35 EU6C30B35 6LBNLI

### Luminous Intensity Polar Plot

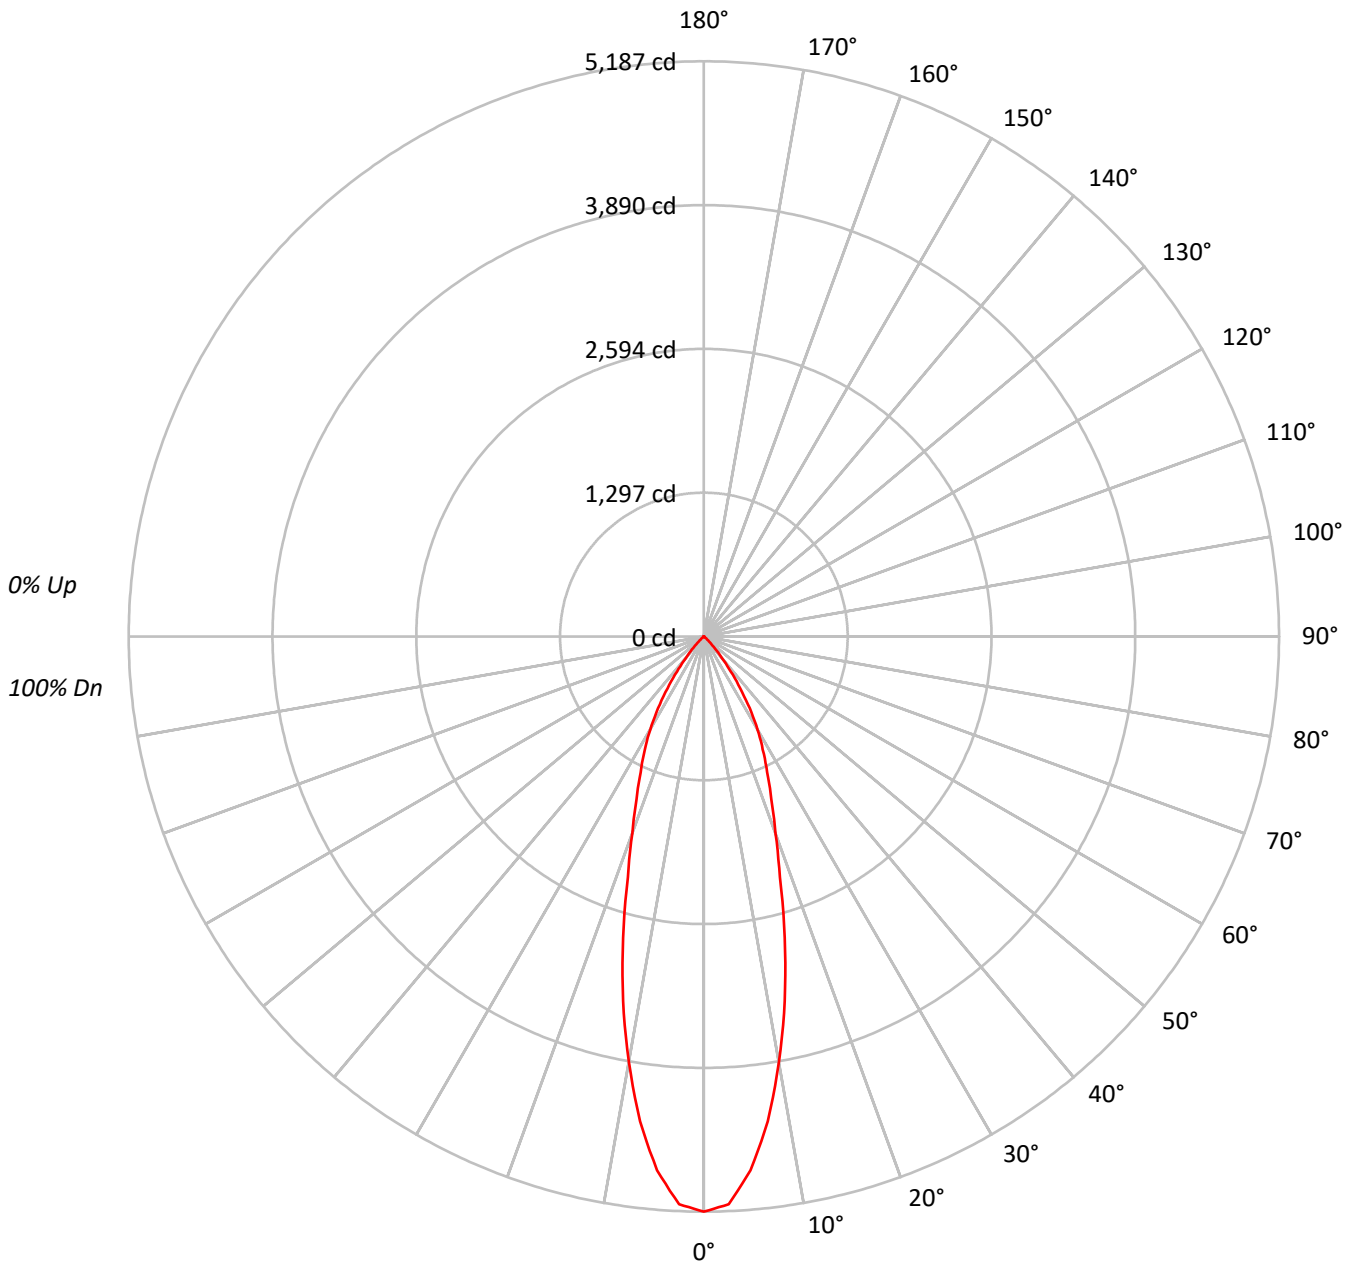



TEST NUMBER: P844313

CATALOG NUMBER: LD6C30DE010B35 EU6C30B35 6LBNLI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	112	109	107	112	109	107	106	105	104	102	102	101	99	98	97	96	95			
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	89			
3	105	99	94	91	103	97	93	90	95	91	89	93	90	87	90	88	86	85			
4	100	93	88	85	98	92	88	84	90	86	83	88	85	82	86	84	81	80			
5	96	88	83	79	94	87	83	79	86	82	78	84	81	78	83	80	77	76			
6	92	84	79	75	90	83	78	75	82	77	74	80	76	74	79	76	73	72			
7	88	80	74	71	87	79	74	71	78	73	70	77	73	70	76	72	69	68			
8	84	76	71	67	83	75	70	67	74	70	67	73	69	66	73	69	66	65			
9	81	73	67	64	80	72	67	64	71	67	63	70	66	63	70	66	63	62			
10	78	69	64	61	77	69	64	61	68	64	61	67	63	60	67	63	60	59			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	284336
5°	265908
10°	216869
15°	159587
20°	109991
25°	81664
30°	61339
35°	38247
40°	18563
45°	6373
50°	836
55°	640
60°	362
65°	428
70°	529
75°	0
80°	0
85°	0



TEST NUMBER: P844313

CATALOG NUMBER: LD6C30DE010B35 EU6C30B35 6LBNLI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	431.2	18.9
10°-20°	774.1	34.0
20°-30°	625.8	27.5
30°-40°	360.5	15.8
40°-50°	76.2	3.3
50°-60°	6.6	0.3
60°-70°	3.3	0.1
70°-80°	0.4	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1831.1	80.4
0°-40°	2191.7	96.2
0°-60°	2274.5	99.8
0°-90°	2278.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2278.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5187	
5°	4832	431
15°	2812	774
25°	1350	626
35°	572	361
45°	82	76
55°	7	7
65°	3	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P844313

CATALOG NUMBER: LD6C30DE010B35 EU6C30B35 6LBNLI

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	5186.7
2.5°	5124.4
5°	4832.1
7.5°	4411.6
10°	3895.9
12.5°	3367.1
15°	2811.9
17.5°	2276.5
20°	1885.4
22.5°	1586.7
25°	1350.1
27.5°	1149.8
30°	969.0
32.5°	768.7
35°	571.5
37.5°	397.5
40°	259.4
42.5°	157.7
45°	82.2
47.5°	32.8
50°	9.8
52.5°	9.8
55°	6.7
57.5°	6.7
60°	3.3
62.5°	3.3
65°	3.3
67.5°	3.3
70°	3.3
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)