

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250291

Luminaire Tested: **LSR8B120D010 EC8B120827 8LBN0GPH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P250291
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13948)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B120D010 EC8B120827 8LBN0GPH
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 2700 CCT WITH GRAPHITE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9376.0 lumens
Efficiency: N/A
Efficacy: 79.3 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.77
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 118.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P250291

CATALOG NUMBER: LSR8B120D010 EC8B120827 8LBN0GPH

Luminous Intensity Polar Plot

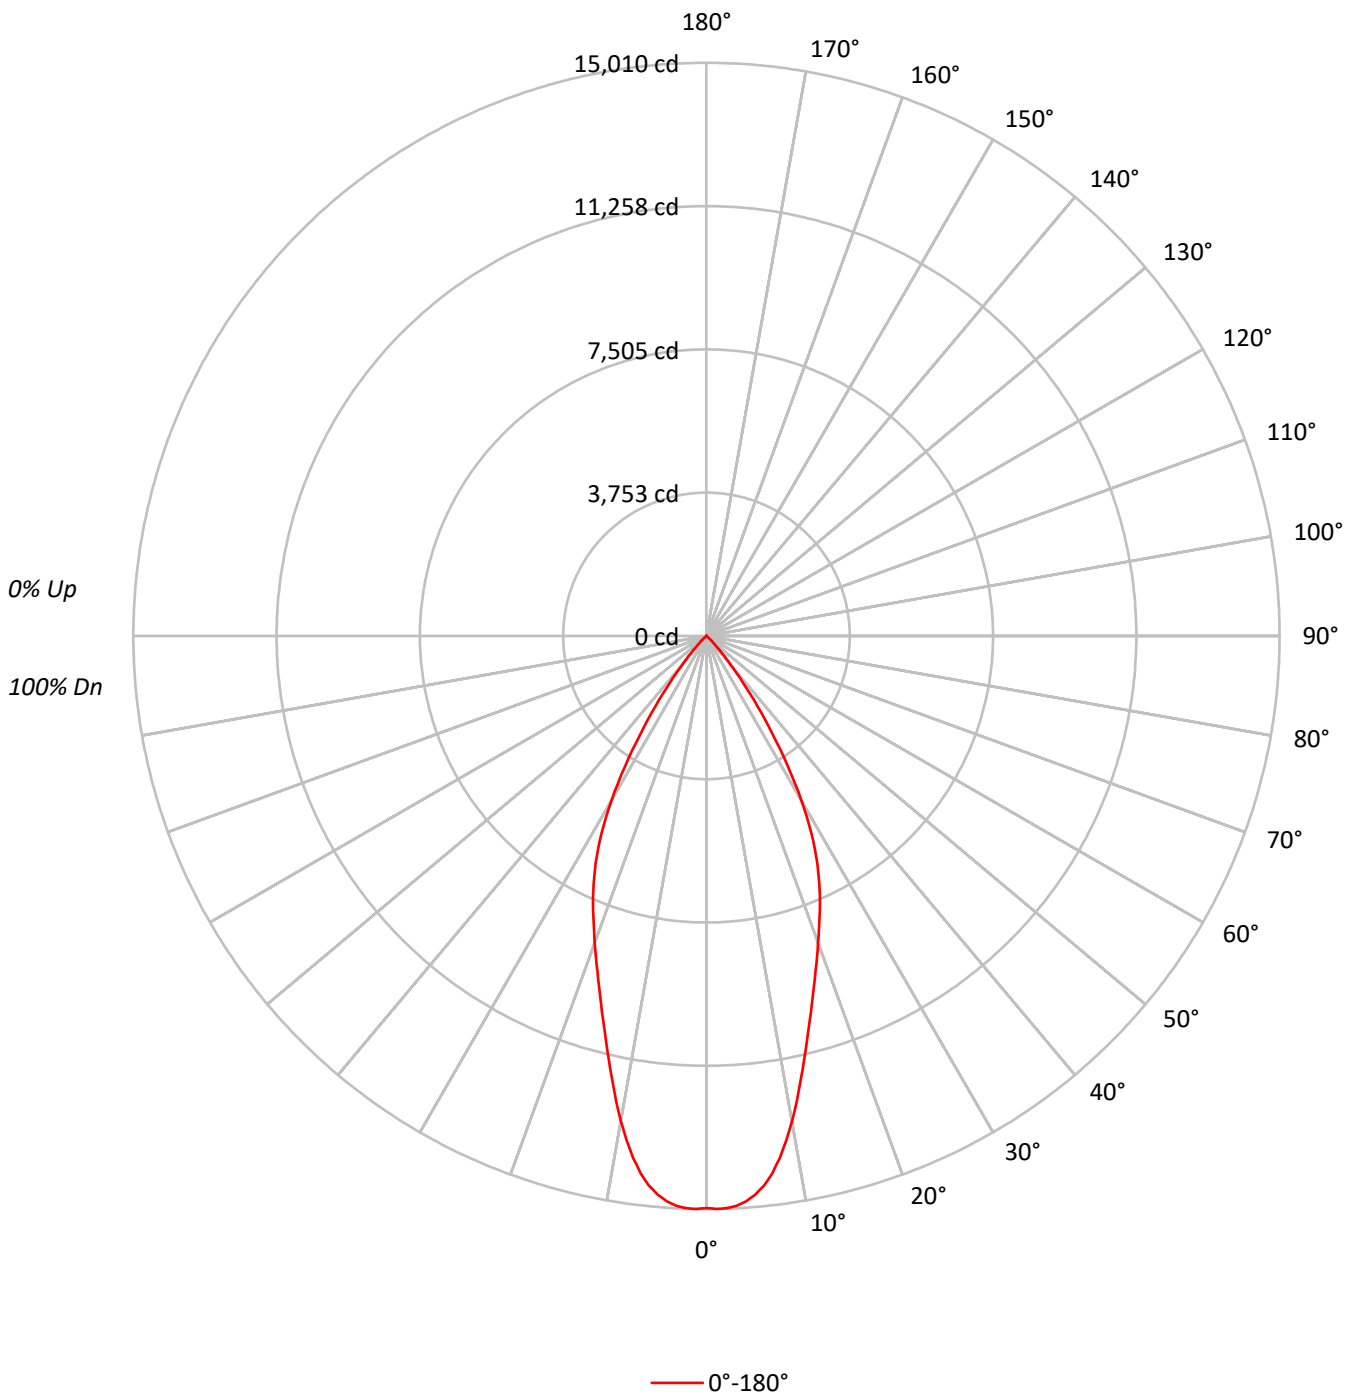



TEST NUMBER: P250291

CATALOG NUMBER: LSR8B120D010 EC8B120827 8LBN0GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102	101	100	99	98	97	96	94
2	109	104	101	97	107	103	99	96	99	97	94	96	94	92	94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	88	92	89	86	89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82	87	84	81	85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74
6	90	82	77	73	89	81	76	72	80	75	72	79	75	71	77	74	71	70
7	86	78	72	68	85	77	72	68	76	71	68	75	71	67	74	70	67	66
8	83	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	65	61	78	70	64	61	69	64	61	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	461987
5°	454604
10°	403906
15°	333189
20°	280610
25°	236679
30°	177211
35°	100292
40°	39654
45°	10645
50°	2039
55°	0
60°	296
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P250291

CATALOG NUMBER: LSR8B120D010 EC8B120827 8LBN0GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1344.9	14.3
10°-20°	2923.1	31.2
20°-30°	3138.2	33.5
30°-40°	1696.1	18.1
40°-50°	264.6	2.8
50°-60°	7.3	0.1
60°-70°	1.8	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	7406.2	79.0
0°-40°	9102.3	97.1
0°-60°	9374.2	100.0
0°-90°	9376.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9376.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	14982	
5°	14686	###
15°	10437	2923
25°	6956	3138
35°	2664	1696
45°	244	265
55°	0	7
65°	0	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P250291

CATALOG NUMBER: LSR8B120D010 EC8B120827 8LBN0GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	14981.9
1°	15010.3
2°	14996.3
3°	14944.9
4°	14846.2
5°	14686.4
6°	14466.4
7°	14170.5
8°	13800.0
9°	13373.6
10°	12899.4
11°	12402.1
12°	11886.1
13°	11370.6
14°	10891.7
15°	10436.9
16°	10019.3
17°	9615.9
18°	9240.6
19°	8889.2
20°	8551.2
21°	8222.8
22°	7912.9
23°	7603.8
24°	7280.2
25°	6956.2
26°	6627.8
27°	6252.8
28°	5839.7
29°	5418.1
30°	4976.9
31°	4503.2
32°	4029.1
33°	3560.2
34°	3086.5
35°	2664.2
37.5°	1702.7
40°	985.1
42.5°	525.5
45°	244.1
47.5°	131.6
50°	42.5
52.5°	4.8
55°	0.0
57.5°	4.8



TEST NUMBER: P250291

CATALOG NUMBER: LSR8B120D010 EC8B120827 8LBN0GPH

CANDELA DISTRIBUTION (continued):

	0°
60°	4.8
62.5°	0.0
65°	0.0
67.5°	4.8
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)