

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250792

Luminaire Tested: **LSR8B60D010 EC8B60827 8LBW0LI**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P250792
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P27941)
Test Lab: INNOVATION CENTER-P2
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LSR8B60D010 EC8B60827 8LBW0LI
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED
DOWNLIGHT- CYLINDEC
80 CRI 2700 CCT WITH SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6174.0 lumens
Efficiency: N/A
Efficacy: 103.8 lumens/watt
Spacing Criteria (0/90/45): 1.34 / 1.34 / 1.17
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 59.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P250792

CATALOG NUMBER: LSR8B60D010 EC8B60827 8LBW0LI

Luminous Intensity Polar Plot

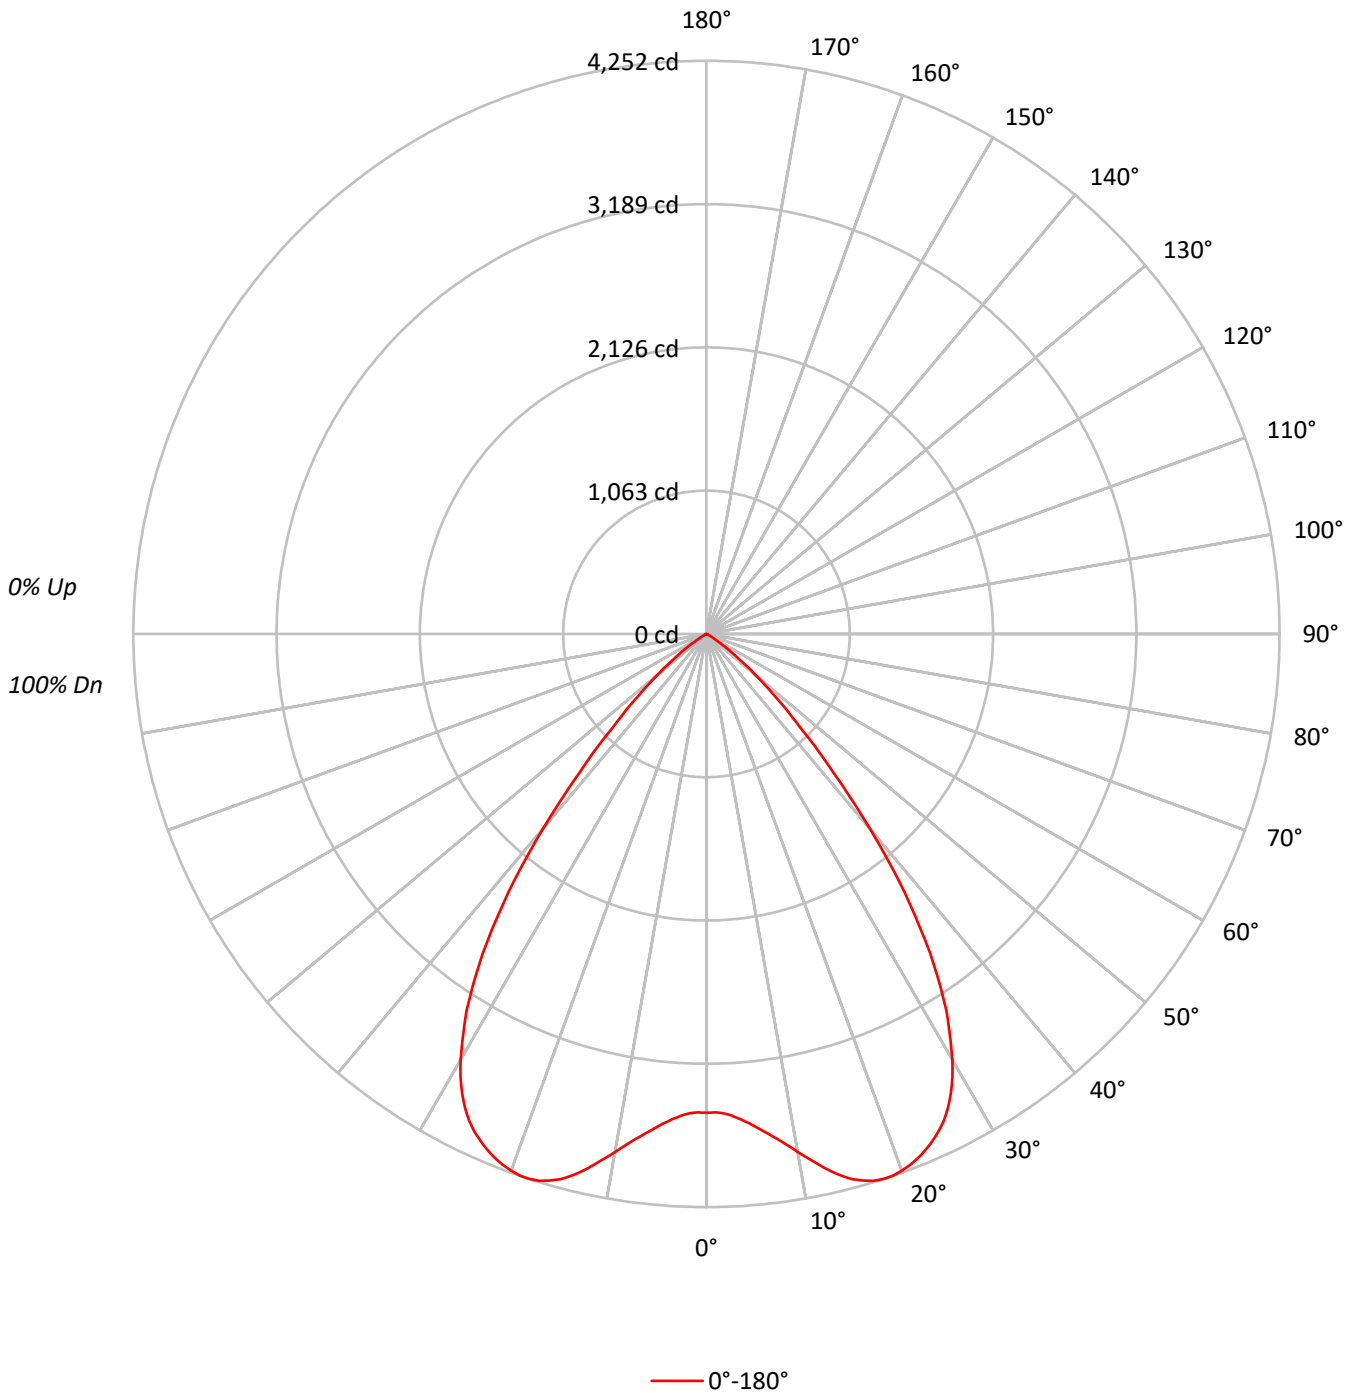



TEST NUMBER: P250792

CATALOG NUMBER: LSR8B60D010 EC8B60827 8LBW0LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		96	95	94	92
2	106	101	97	93	104	99	95	92	96	93	90		93	90	88		90	88	86	84
3	100	93	87	83	98	92	86	82	89	85	81		86	83	80		84	81	78	77
4	94	86	79	75	92	84	79	74	82	77	73		80	76	72		78	75	72	70
5	88	79	72	68	87	78	72	67	76	71	67		74	70	66		73	69	65	64
6	83	73	66	62	82	72	66	61	71	65	61		69	64	60		68	63	60	58
7	78	68	61	56	77	67	61	56	66	60	56		64	59	55		63	59	55	54
8	74	63	56	52	72	62	56	52	61	55	51		60	55	51		59	54	51	49
9	70	59	52	48	68	58	52	47	57	51	47		56	51	47		55	50	47	45
10	66	55	48	44	65	54	48	44	53	48	44		53	47	44		52	47	43	42

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	109540
5°	112781
10°	122179
15°	133682
20°	139075
25°	138567
30°	129975
35°	108987
40°	75883
45°	43461
50°	23339
55°	9629
60°	2399
65°	613
70°	307
75°	203
80°	302
85°	0



TEST NUMBER: P250792

CATALOG NUMBER: LSR8B60D010 EC8B60827 8LBW0LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	356.2	5.8
10°-20°	1180.2	19.1
20°-30°	1857.0	30.1
30°-40°	1766.4	28.6
40°-50°	814.4	13.2
50°-60°	185.0	3.0
60°-70°	12.2	0.2
70°-80°	2.5	0.0
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3393.4	55.0
0°-40°	5159.8	83.6
0°-60°	6159.2	99.8
0°-90°	6174.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6174.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3552	
5°	3644	356
15°	4188	1180
25°	4073	1857
35°	2895	1766
45°	997	814
55°	179	185
65°	8	12
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P250792

CATALOG NUMBER: LSR8B60D010 EC8B60827 8LBW0LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	3552.3
1°	3550.6
2°	3557.4
3°	3577.7
4°	3608.1
5°	3643.5
6°	3687.5
7°	3734.8
8°	3783.7
9°	3841.2
10°	3902.0
11°	3962.8
12°	4027.0
13°	4087.8
14°	4143.5
15°	4187.5
16°	4219.5
17°	4241.5
18°	4251.6
19°	4250.0
20°	4238.1
21°	4217.9
22°	4192.5
23°	4158.7
24°	4119.9
25°	4072.6
26°	4016.8
27°	3945.9
28°	3861.4
29°	3763.5
30°	3650.3
32.5°	3310.8
35°	2895.2
37.5°	2412.1
40°	1885.1
42.5°	1393.6
45°	996.6
47.5°	706.1
50°	486.5
52.5°	310.8
55°	179.1
57.5°	89.5
60°	38.9
62.5°	15.2
65°	8.4



TEST NUMBER: P250792

CATALOG NUMBER: LSR8B60D010 EC8B60827 8LBW0LI

CANDELA DISTRIBUTION (continued):

	0°
67.5°	5.1
70°	3.4
72.5°	3.4
75°	1.7
77.5°	1.7
80°	1.7
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)