

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250461

Luminaire Tested: **LD8B175D010 ER8B175827 8LBM0GPH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P250461
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14005)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD8B175D010 ER8B175827 8LBM0GPH
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED
DOWNLIGHT
80 CRI 2700 CCT WITH GRAPHITE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 14905.0 lumens
Efficiency: N/A
Efficacy: 84.1 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.87
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 177.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P250461

CATALOG NUMBER: LD8B175D010 ER8B175827 8LBM0GPH

Luminous Intensity Polar Plot

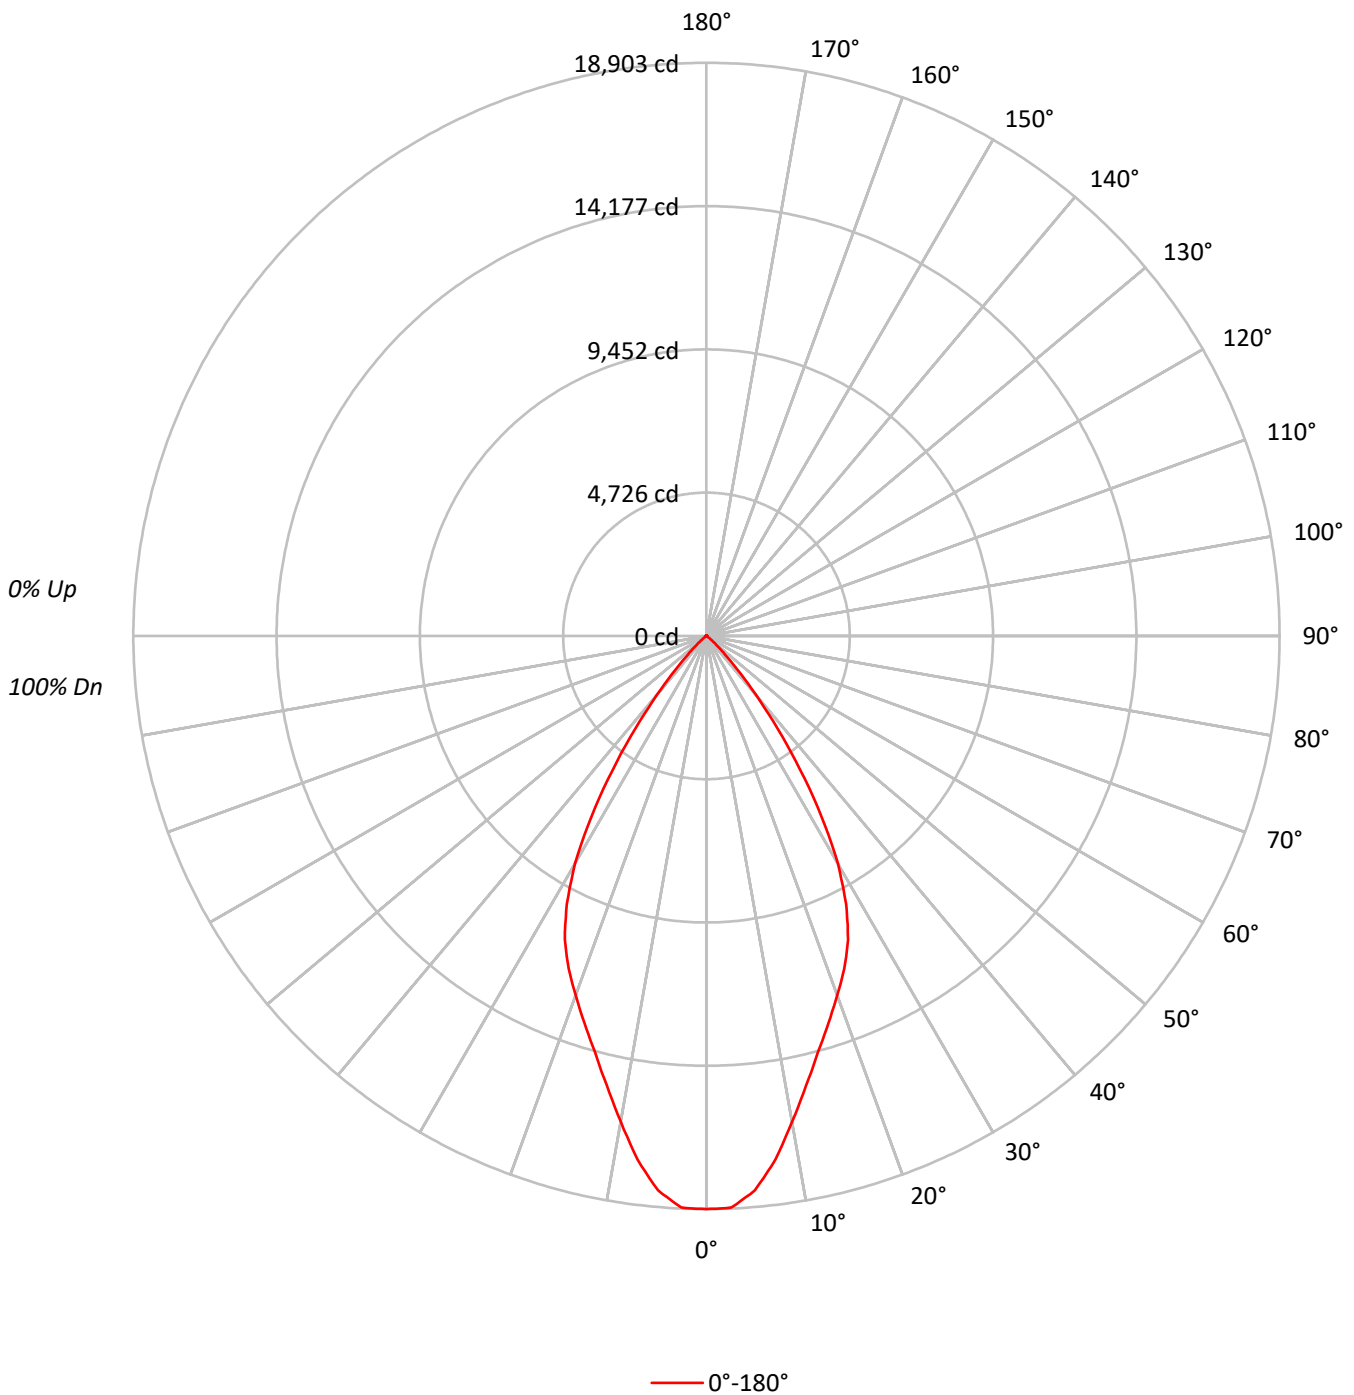



TEST NUMBER: P250461

CATALOG NUMBER: LD8B175D010 ER8B175827 8LBM0GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	108	106	111	109	107	105	105	103	101	101	100	98	98	96	95	94
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87
3	103	96	92	88	101	95	91	87	92	89	86	90	87	84	88	85	83	81
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	77	76
5	93	85	79	75	91	84	78	74	82	77	74	80	76	73	79	75	72	71
6	88	79	73	69	87	79	73	69	77	72	69	76	71	68	74	71	68	66
7	84	75	69	65	82	74	68	64	73	68	64	72	67	64	70	66	63	62
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	59	58
9	76	66	61	57	75	66	60	57	65	60	56	64	59	56	63	59	56	55
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	582911
5°	568175
10°	509340
15°	453638
20°	413831
25°	375990
30°	308308
35°	202902
40°	101219
45°	37674
50°	11442
55°	1382
60°	796
65°	0
70°	586
75°	2311
80°	0
85°	2300



TEST NUMBER: P250461

CATALOG NUMBER: LD8B175D010 ER8B175827 8LBM0GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1682.9	11.3
10°-20°	4001.4	26.8
20°-30°	4985.1	33.4
30°-40°	3362.5	22.6
40°-50°	795.1	5.3
50°-60°	58.1	0.4
60°-70°	10.4	0.1
70°-80°	7.7	0.1
80°-90°	1.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	10669.4	71.6
0°-40°	14032.0	94.1
0°-60°	14885.2	99.9
0°-90°	14905.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	14905.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	18903	
5°	18355	###
15°	14210	4001
25°	11051	4985
35°	5390	3363
45°	864	795
55°	26	58
65°	0	10
75°	19	8
85°	6	2
90°	0	



TEST NUMBER: P250461

CATALOG NUMBER: LD8B175D010 ER8B175827 8LBM0GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	18903.4
2.5°	18871.3
5°	18355.4
7.5°	17420.6
10°	16266.6
12.5°	15177.0
15°	14209.9
17.5°	13378.1
20°	12610.9
22.5°	11875.9
25°	11050.7
27.5°	9974.0
30°	8658.7
32.5°	7066.3
35°	5390.0
37.5°	3855.5
40°	2514.5
42.5°	1502.3
45°	863.9
47.5°	483.5
50°	238.5
52.5°	109.6
55°	25.7
57.5°	6.5
60°	12.9
62.5°	19.4
65°	0.0
67.5°	12.9
70°	6.5
72.5°	6.5
75°	19.4
77.5°	0.0
80°	0.0
82.5°	0.0
85°	6.5
87.5°	0.0
90°	0.0

(END OF REPORT)