

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P245750

Luminaire Tested: **LD8B20D010 ER8B20830 8LBS0GPH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P245750
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-16)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD8B20D010 ER8B20830 8LBS0GPH
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT
80 CRI 3000 CCT WITH GRAPHITE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2084.0 lumens
Efficiency: N/A
Efficacy: 97.8 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.25
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 21.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P245750

CATALOG NUMBER: LD8B20D010 ER8B20830 8LBS0GPH

Luminous Intensity Polar Plot

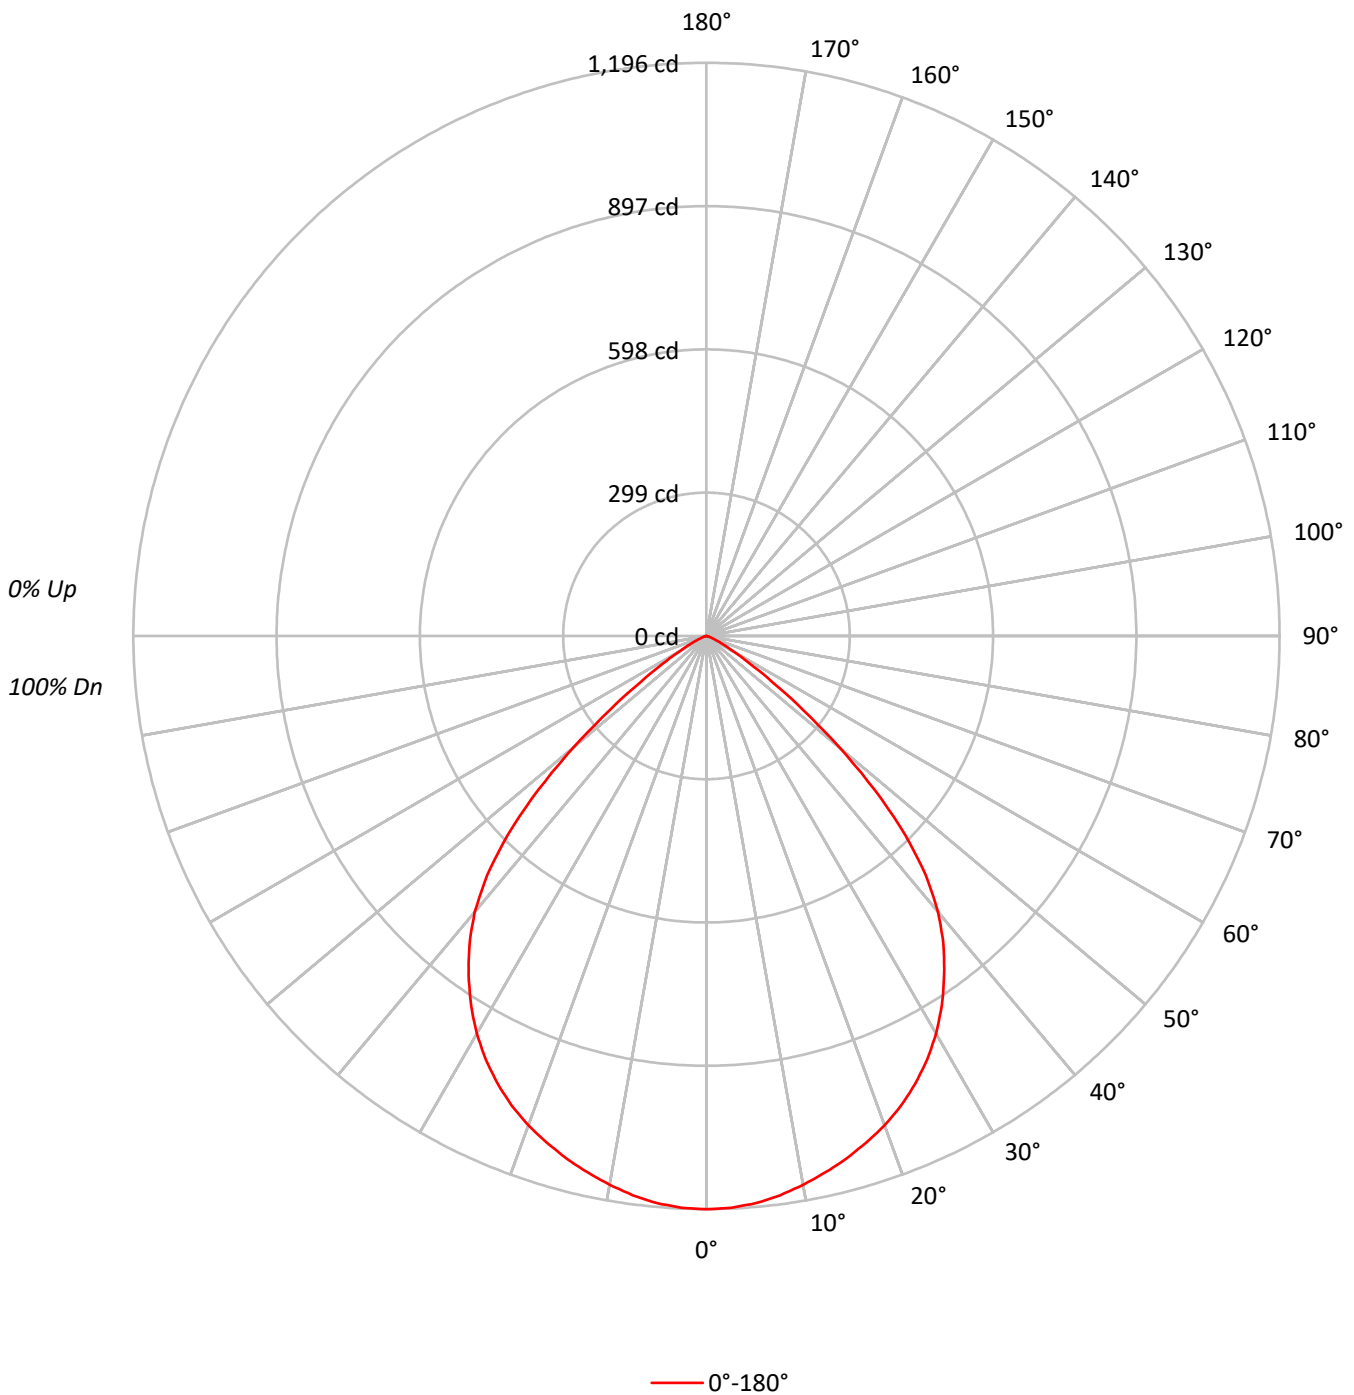



TEST NUMBER: P245750

CATALOG NUMBER: LD8B20D010 ER8B20830 8LBS0GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98	99	97	95	95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	90	84	79	96	88	83	78	86	81	77	83	79	76	81	77	74	73
4	91	82	75	70	89	81	74	69	78	73	69	76	72	68	74	70	67	65
5	85	75	68	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58
6	79	69	61	56	78	68	61	56	66	60	55	64	59	55	63	58	54	53
7	74	63	56	50	73	62	55	50	61	55	50	59	54	50	58	53	49	48
8	70	58	51	46	68	57	50	46	56	50	45	55	49	45	54	49	45	43
9	65	54	47	42	64	53	46	42	52	46	41	51	45	41	50	45	41	40
10	62	50	43	38	60	49	43	38	48	42	38	48	42	38	47	42	38	36

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	36886
5°	36777
10°	36413
15°	36039
20°	35660
25°	35079
30°	34118
35°	32562
40°	30275
45°	25564
50°	17357
55°	9070
60°	4070
65°	1985
70°	793
75°	488
80°	355
85°	248



TEST NUMBER: P245750

CATALOG NUMBER: LD8B20D010 ER8B20830 8LBS0GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	112.6	5.4
10°-20°	318.4	15.3
20°-30°	474.0	22.7
30°-40°	538.8	25.9
40°-50°	440.6	21.1
50°-60°	164.3	7.9
60°-70°	30.0	1.4
70°-80°	4.6	0.2
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	905.0	43.4
0°-40°	1443.9	69.3
0°-60°	2048.7	98.3
0°-90°	2084.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2084.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1196	
5°	1188	113
15°	1129	318
25°	1031	474
35°	865	539
45°	586	441
55°	169	164
65°	27	30
75°	4	5
85°	1	1
90°	0	



TEST NUMBER: P245750

CATALOG NUMBER: LD8B20D010 ER8B20830 8LBS0GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1196.2
2.5°	1194.2
5°	1188.1
7.5°	1177.2
10°	1162.9
12.5°	1146.6
15°	1128.9
17.5°	1108.5
20°	1086.7
22.5°	1060.9
25°	1031.0
27.5°	997.0
30°	958.2
32.5°	914.0
35°	865.0
37.5°	812.7
40°	752.1
42.5°	677.3
45°	586.2
47.5°	476.7
50°	361.8
52.5°	255.0
55°	168.7
57.5°	106.1
60°	66.0
62.5°	42.2
65°	27.2
67.5°	15.6
70°	8.8
72.5°	5.4
75°	4.1
77.5°	2.7
80°	2.0
82.5°	0.7
85°	0.7
87.5°	0.0
90°	0.0

(END OF REPORT)