

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250984

Luminaire Tested: **LD8B60D010 ER8B60827 8LBS0H**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P250984  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-13)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B60D010 ER8B60827 8LBS0H  
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
80 CRI 2700 CCT WITH SEMI-SPECULAR CLEAR TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6414.0 lumens  
Efficiency: N/A  
Efficacy: 107.8 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.23  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 59.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P250984

CATALOG NUMBER: LD8B60D010 ER8B60827 8LBS0H

### Luminous Intensity Polar Plot

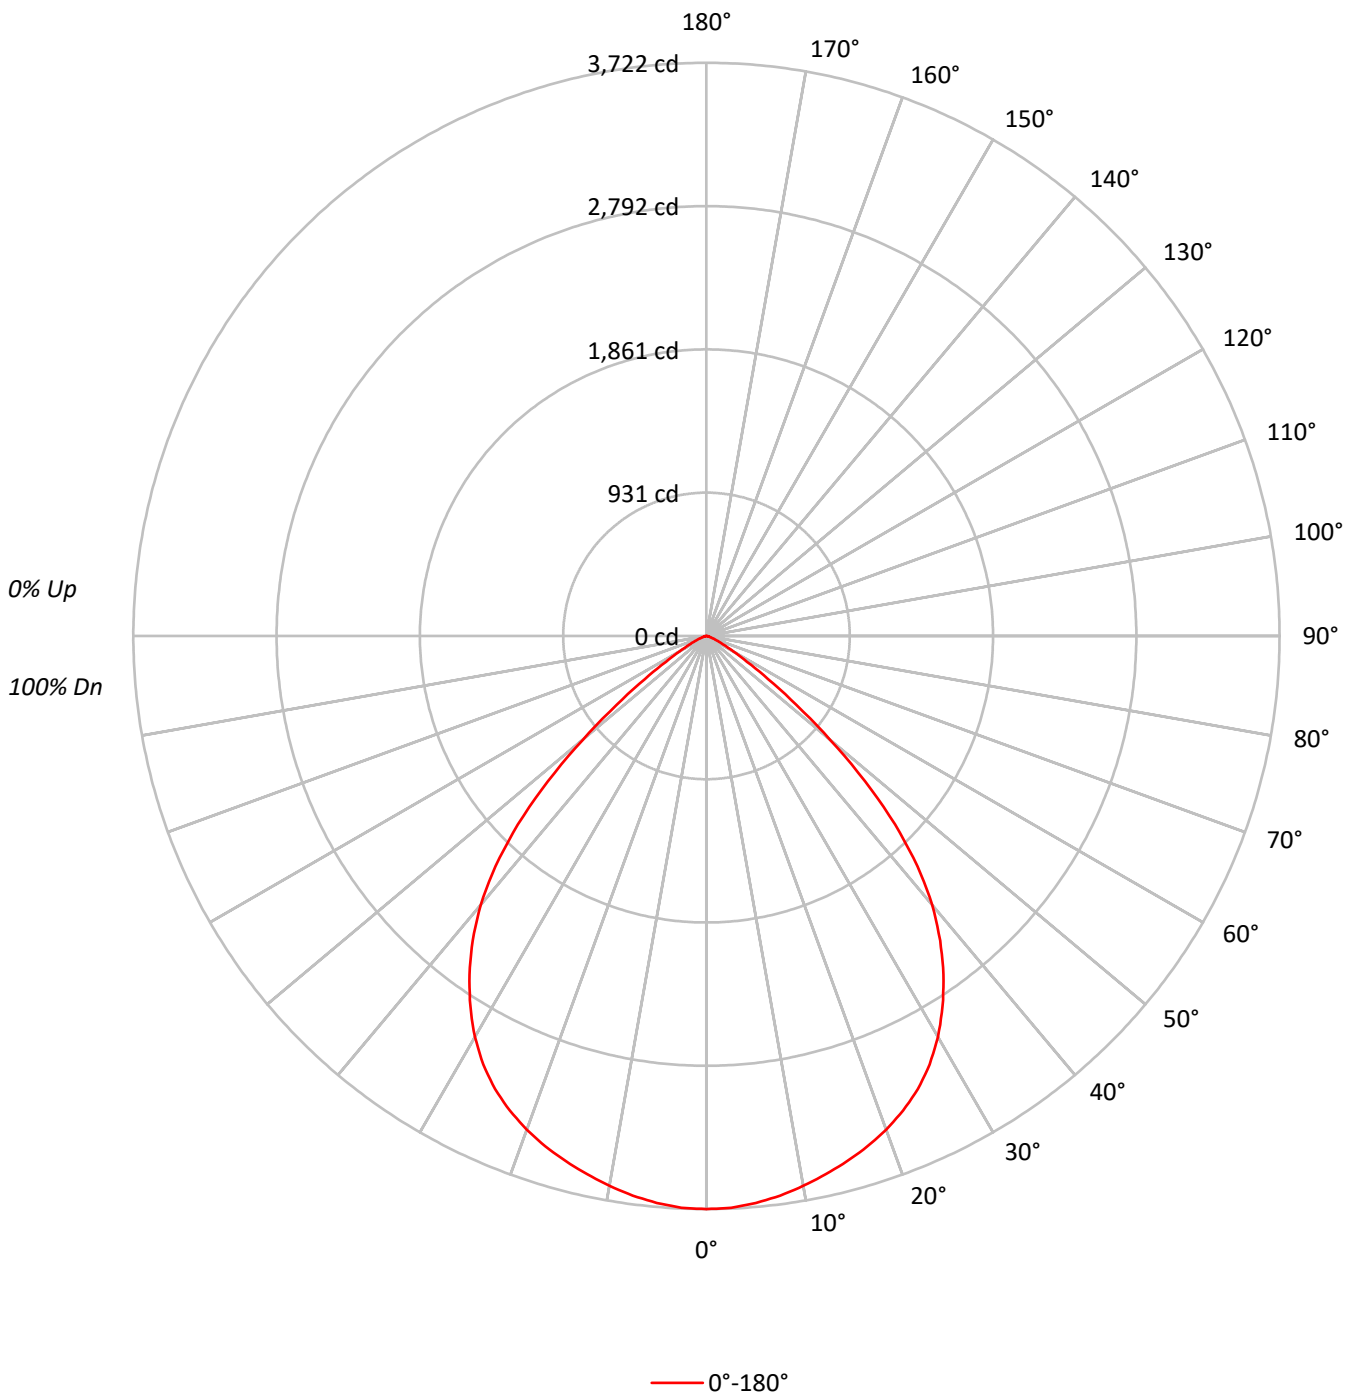



TEST NUMBER: P250984

CATALOG NUMBER: LD8B60D010 ER8B60827 8LBSOH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98		99	97	95		95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88	85	83	81
3	98	90	84	79	96	89	83	78	86	81	77		83	79	76		81	78	75	73
4	91	82	75	70	89	81	75	70	79	73	69		76	72	68		74	70	67	65
5	85	75	68	63	83	74	67	62	72	66	62		70	65	61		69	64	60	59
6	80	69	61	56	78	68	61	56	66	60	56		65	59	55		63	58	55	53
7	75	63	56	51	73	63	56	51	61	55	50		60	54	50		59	54	50	48
8	70	58	51	46	68	58	51	46	57	50	46		55	50	46		54	49	45	44
9	66	54	47	42	64	53	47	42	52	46	42		51	46	42		51	45	42	40
10	62	50	43	39	61	50	43	39	49	43	38		48	42	38		47	42	38	37

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	114779
5°	114397
10°	113531
15°	112730
20°	111966
25°	110493
30°	107080
35°	101033
40°	91819
45°	75553
50°	50357
55°	26236
60°	12365
65°	6487
70°	3237
75°	2252
80°	1687
85°	1344



TEST NUMBER: P250984

CATALOG NUMBER: LD8B60D010 ER8B60827 8LBSOH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	350.6	5.5
10°-20°	996.6	15.5
20°-30°	1490.9	23.2
30°-40°	1667.6	26.0
40°-50°	1308.3	20.4
50°-60°	477.4	7.4
60°-70°	97.3	1.5
70°-80°	20.9	0.3
80°-90°	4.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2838.1	44.2
0°-40°	4505.8	70.2
0°-60°	6291.4	98.1
0°-90°	6414.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6414.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3722	
5°	3696	351
15°	3531	997
25°	3248	1491
35°	2684	1668
45°	1732	1308
55°	488	477
65°	89	97
75°	19	21
85°	4	4
90°	0	



TEST NUMBER: P250984

CATALOG NUMBER: LD8B60D010 ER8B60827 8LBS0H

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3722.2
2.5°	3716.5
5°	3695.7
7.5°	3665.5
10°	3625.8
12.5°	3580.4
15°	3531.2
17.5°	3476.3
20°	3412.0
22.5°	3336.4
25°	3247.5
27.5°	3137.8
30°	3007.3
32.5°	2854.1
35°	2683.9
37.5°	2492.8
40°	2281.0
42.5°	2029.4
45°	1732.5
47.5°	1397.7
50°	1049.7
52.5°	735.7
55°	488.0
57.5°	312.1
60°	200.5
62.5°	132.4
65°	88.9
67.5°	56.7
70°	35.9
72.5°	24.6
75°	18.9
77.5°	13.2
80°	9.5
82.5°	5.7
85°	3.8
87.5°	1.9
90°	0.0

(END OF REPORT)