

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P865740

Luminaire Tested: PRLX-2004-S-927-10L-G-U-S-X-X-BLAK-X

Issue Date: 8/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P865740
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2304-993-14)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 8/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: Prenalux
Catalog Number: PRLX-2004-S-927-10L-G-U-S-X-X-BLAK-X
Description: PRENTALUX 3D PRINTED PENDANT LED LUMINAIRE, SMALL LIGHT ENGINE, GLOBE LENS,
BELL WITH BLACK INTERIOR SHADE.
LIGHT LEVEL 2
Light Source: 2700K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 114.0 lumens
Efficiency: N/A
Efficacy: 10.9 lumens/watt
Spacing Criteria (0/90/45): 1.26 / 1.26 / 1.2
Luminous Opening: Circular (Dia: 0.92' x H: 0')
CIE Type: Direct

Input Watts (W): 10.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: 0.5 HR
Operation Time: 3 HR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P865740

CATALOG NUMBER: PRLX-2004-S-927-10L-G-U-S-X-X-BLAK-X

Luminous Intensity Polar Plot

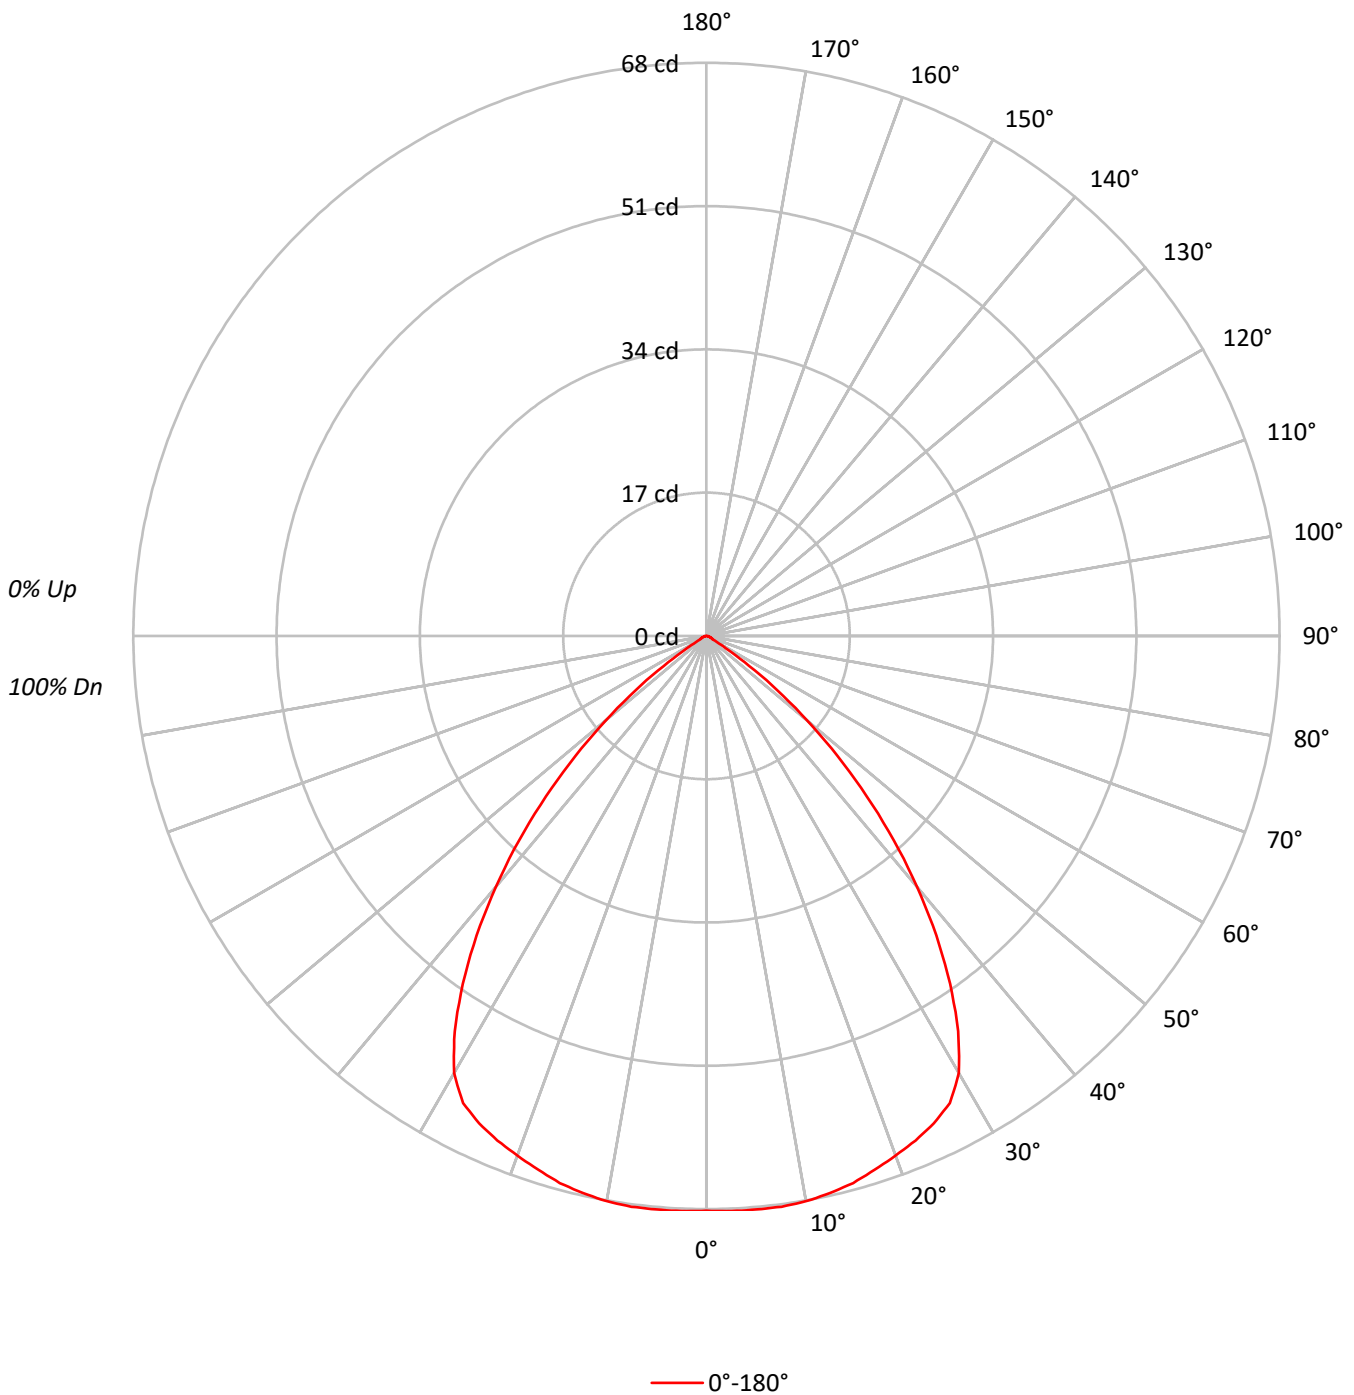



TEST NUMBER: P865740

CATALOG NUMBER: PRLX-2004-S-927-10L-G-U-S-X-X-BLAK-X

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96	94	93	91
2	106	100	95	91	103	98	94	90	95	91	88		92	89	86		89	86	84	83
3	99	91	85	81	97	90	84	80	87	82	79		85	81	77		82	79	76	74
4	93	84	77	72	91	82	76	71	80	75	71		78	73	70		76	72	69	67
5	87	77	70	65	85	76	69	64	74	68	64		72	67	63		70	66	62	61
6	81	71	63	58	79	70	63	58	68	62	58		67	61	57		65	60	57	55
7	76	65	58	53	75	64	58	53	63	57	52		62	56	52		60	56	52	50
8	71	60	53	48	70	60	53	48	58	52	48		57	52	48		56	51	47	46
9	67	56	49	44	66	55	49	44	54	48	44		53	48	44		52	47	44	42
10	63	52	45	41	62	52	45	41	51	45	41		50	44	40		49	44	40	39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1112
5°	1118
10°	1128
15°	1135
20°	1139
25°	1148
30°	1128
35°	1004
40°	828
45°	620
50°	396
55°	176
60°	36
65°	27
70°	24
75°	19
80°	19
85°	19

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 620 cd/sqm

TEST NUMBER: P865740

CATALOG NUMBER: PRLX-2004-S-927-10L-G-U-S-X-X-BLAK-X

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	6.5	5.7
10°-20°	19.0	16.6
20°-30°	29.3	25.7
30°-40°	31.2	27.4
40°-50°	20.7	18.2
50°-60°	6.1	5.4
60°-70°	0.7	0.6
70°-80°	0.3	0.3
80°-90°	0.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	54.8	48.1
0°-40°	86.0	75.4
0°-60°	112.8	99.0
0°-90°	114.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	114.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	68	
5°	68	7
15°	67	19
25°	64	29
35°	50	31
45°	27	21
55°	6	6
65°	1	1
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P865740

CATALOG NUMBER: PRLX-2004-S-927-10L-G-U-S-X-X-BLAK-X

CANDELA DISTRIBUTION (FULL):

	0°
0°	68.2
2.5°	68.3
5°	68.3
7.5°	68.3
10°	68.1
12.5°	67.7
15°	67.2
17.5°	66.4
20°	65.6
22.5°	64.8
25°	63.8
27.5°	62.5
30°	59.9
32.5°	55.6
35°	50.4
37.5°	44.8
40°	38.9
42.5°	32.9
45°	26.9
47.5°	21.1
50°	15.6
52.5°	10.6
55°	6.2
57.5°	2.7
60°	1.1
62.5°	0.8
65°	0.7
67.5°	0.6
70°	0.5
72.5°	0.4
75°	0.3
77.5°	0.2
80°	0.2
82.5°	0.2
85°	0.1
87.5°	0.1
90°	0.0



TEST NUMBER: P865740
 CATALOG NUMBER: PRLX-2004-S-927-10L-G-U-S-X-X-BLAK-X

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4H	2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00