

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: RSA

Report Number: P219852

Luminaire Tested: **MRZ-1-REC-X-1H-L27-80-WFL-UNV-X-STD-HEX**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P219852
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14881)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: RSA
Catalog Number: MRZ-1-REC-X-1H-L27-80-WFL-UNV-X-STD-HEX
Description: MRZ INTEGRAL LED DOWNLIGHT
55 DEGREE WIDE FLOOD OPTIC WITH HEX LOUVER, LIGHT LEVEL 1
Light Source: (1) 2700K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 284.3 lumens
Efficiency: N/A
Efficacy: 41.8 lumens/watt
Spacing Criteria (0/90/45): 0.62 / 0.62 / 0.67
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 6.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P219852

CATALOG NUMBER: MRZ-1-REC-X-1H-L27-80-WFL-UNV-X-STD-HEX

Luminous Intensity Polar Plot

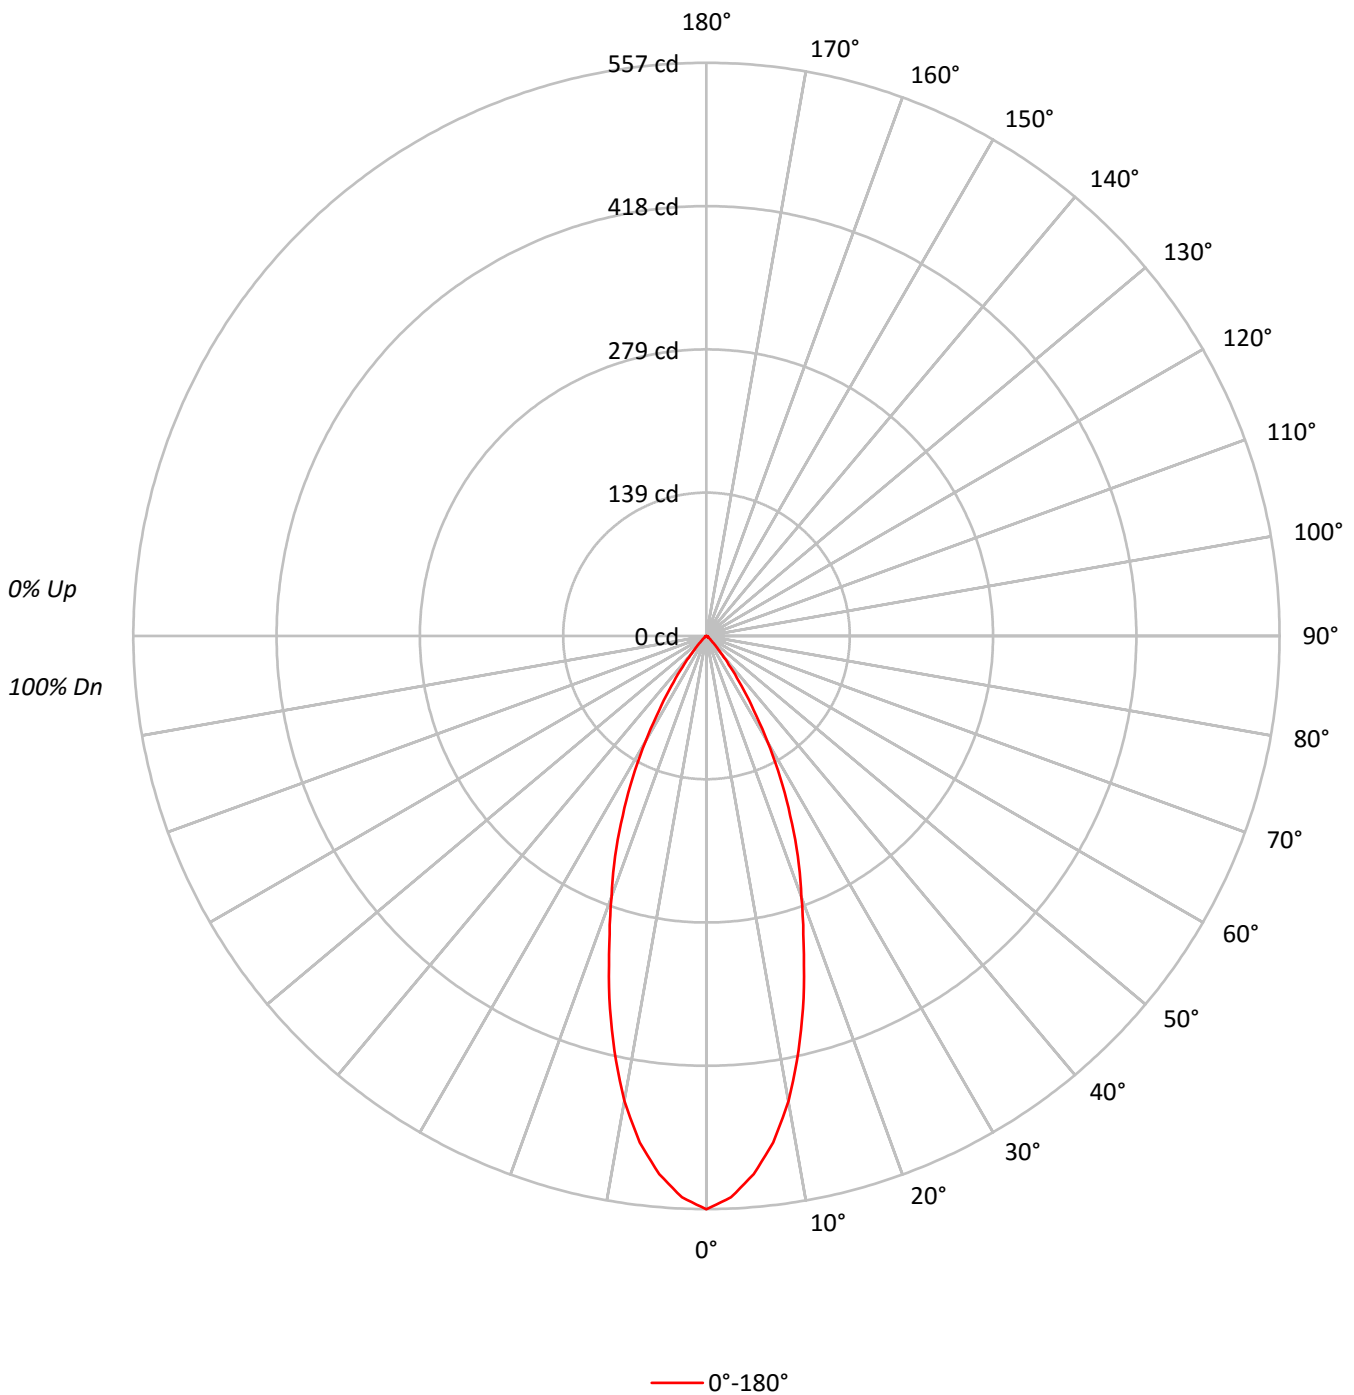



TEST NUMBER: P219852

CATALOG NUMBER: MRZ-1-REC-X-1H-L27-80-WFL-UNV-X-STD-HEX

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	109	107	112	109	107	106	105	104	102	102	100	99	98	97	96	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	89
3	104	99	94	91	103	97	93	90	95	91	89	92	90	87	90	88	86	84
4	100	93	88	85	98	92	88	84	90	86	83	88	85	82	86	84	81	80
5	96	88	83	79	94	87	83	79	86	81	78	84	80	78	83	79	77	76
6	92	84	78	75	90	83	78	74	82	77	74	80	76	73	79	76	73	72
7	88	80	74	71	87	79	74	70	78	73	70	77	73	70	76	72	69	68
8	84	76	71	67	83	75	70	67	74	70	66	73	69	66	72	69	66	65
9	81	72	67	64	80	72	67	63	71	66	63	70	66	63	69	66	63	62
10	78	69	64	61	77	69	64	60	68	63	60	67	63	60	67	63	60	59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	274911
5°	260014
10°	229955
15°	186181
20°	141762
25°	104903
30°	67510
35°	35656
40°	15457
45°	5722
50°	2303
55°	1290
60°	691
65°	817
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P219852

CATALOG NUMBER: MRZ-1-REC-X-1H-L27-80-WFL-UNV-X-STD-HEX

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	48.1	16.9
10°-20°	100.4	35.3
20°-30°	87.5	30.8
30°-40°	38.8	13.6
40°-50°	7.6	2.7
50°-60°	1.6	0.6
60°-70°	0.4	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	235.9	83.0
0°-40°	274.7	96.6
0°-60°	283.9	99.8
0°-90°	284.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	284.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	557	
5°	525	48
15°	364	100
25°	193	87
35°	59	39
45°	8	8
55°	2	2
65°	1	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P219852

CATALOG NUMBER: MRZ-1-REC-X-1H-L27-80-WFL-UNV-X-STD-HEX

CANDELA DISTRIBUTION (FULL):

	0°
0°	557.2
2.5°	546.0
5°	525.0
7.5°	496.5
10°	459.0
12.5°	413.2
15°	364.5
17.5°	313.5
20°	270.0
22.5°	231.7
25°	192.7
27.5°	155.2
30°	118.5
32.5°	85.5
35°	59.2
37.5°	38.2
40°	24.0
42.5°	13.5
45°	8.2
47.5°	5.2
50°	3.0
52.5°	2.2
55°	1.5
57.5°	1.5
60°	0.7
62.5°	0.7
65°	0.7
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)