

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: RSA

Report Number: P219734

Luminaire Tested: **MRZ-1-REC-X-1H-L35-97-FL-UNV-X-STD-HEX**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P219734  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14876)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: RSA  
Catalog Number: MRZ-1-REC-X-1H-L35-97-FL-UNV-X-STD-HEX  
Description: MRZ INTEGRAL LED DOWNLIGHT  
40 DEGREE FLOOD OPTIC WITH HEX LOUVER, LIGHT LEVEL 1  
Light Source: (1) 3500K CCT, 97 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 313.7 lumens  
Efficiency: N/A  
Efficacy: 46.1 lumens/watt  
Spacing Criteria (0/90/45): 0.56 / 0.56 / 0.55  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 6.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P219734

CATALOG NUMBER: MRZ-1-REC-X-1H-L35-97-FL-UNV-X-STD-HEX

### Luminous Intensity Polar Plot

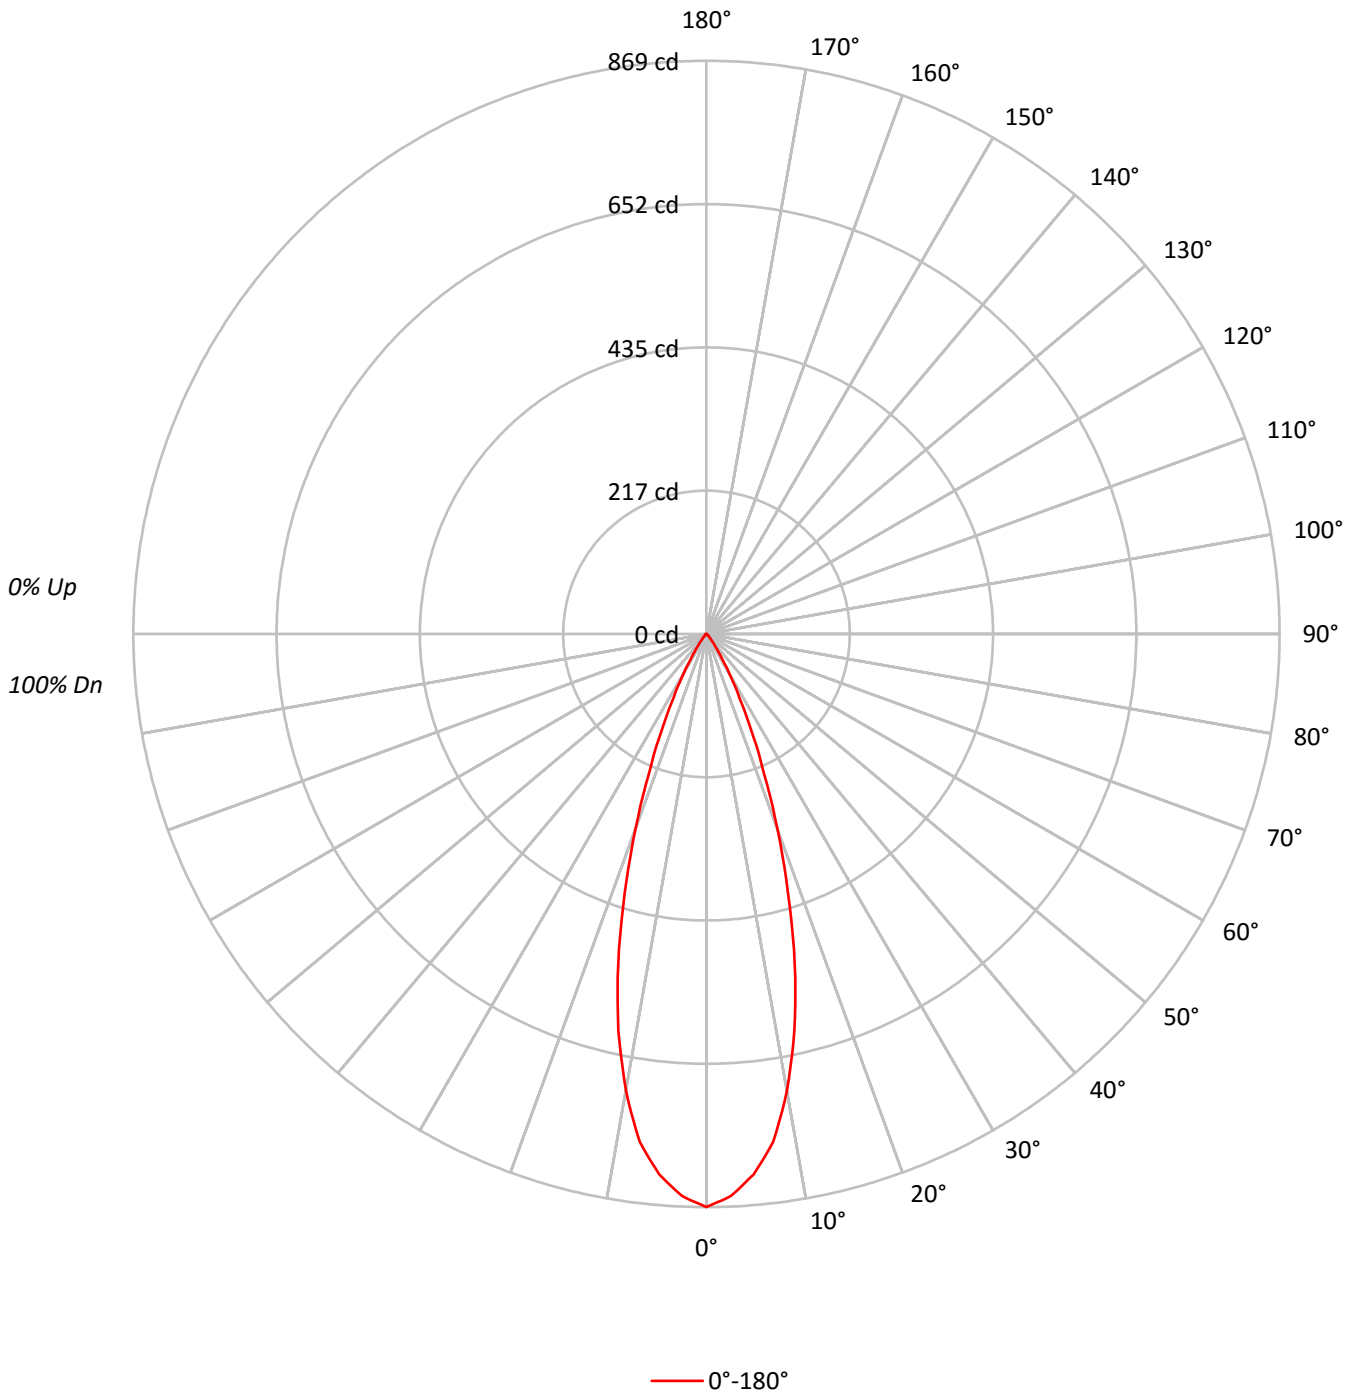



TEST NUMBER: P219734

CATALOG NUMBER: MRZ-1-REC-X-1H-L35-97-FL-UNV-X-STD-HEX

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96
2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92
3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88
4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84
5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81
6	95	88	84	80	94	88	83	80	86	83	80	85	82	79	84	81	79	78
7	92	85	80	77	91	84	80	77	83	79	76	82	79	76	81	78	76	75
8	89	82	77	74	88	81	77	74	80	76	73	79	76	73	78	75	73	72
9	86	79	74	71	85	78	74	71	77	73	71	77	73	70	76	73	70	69
10	83	76	71	68	83	76	71	68	75	71	68	74	70	68	73	70	68	67

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	428697
5°	407305
10°	352297
15°	264229
20°	164706
25°	86557
30°	39025
35°	15118
40°	5925
45°	3000
50°	1382
55°	1032
60°	592
65°	700
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P219734

CATALOG NUMBER: MRZ-1-REC-X-1H-L35-97-FL-UNV-X-STD-HEX

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	74.9	23.9
10°-20°	139.8	44.6
20°-30°	75.9	24.2
30°-40°	18.4	5.9
40°-50°	3.5	1.1
50°-60°	0.9	0.3
60°-70°	0.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	290.5	92.6
0°-40°	308.9	98.5
0°-60°	313.3	99.9
0°-90°	313.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	313.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	869	
5°	822	75
15°	517	140
25°	159	76
35°	25	18
45°	4	3
55°	1	1
65°	1	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P219734

CATALOG NUMBER: MRZ-1-REC-X-1H-L35-97-FL-UNV-X-STD-HEX

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	868.9
2.5°	853.0
5°	822.4
7.5°	776.6
10°	703.2
12.5°	616.4
15°	517.3
17.5°	411.5
20°	313.7
22.5°	226.9
25°	159.0
27.5°	107.0
30°	68.5
32.5°	42.2
35°	25.1
37.5°	15.3
40°	9.2
42.5°	6.1
45°	4.3
47.5°	2.4
50°	1.8
52.5°	1.2
55°	1.2
57.5°	0.6
60°	0.6
62.5°	0.6
65°	0.6
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)