

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: RSA

Report Number: P226158

Luminaire Tested: **MRZ-1-REC-X-1-L35-97-FL-UNV-X-STD-SFL**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P226158
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14878)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: RSA
Catalog Number: MRZ-1-REC-X-1-L35-97-FL-UNV-X-STD-SFL
Description: MRZ INTEGRAL LED DOWNLIGHT
40 DEGREE FLOOD OPTIC WITH SOFT FOCUS LENS, LIGHT LEVEL 1
Light Source: (1) 3500K CCT, 97 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 453.9 lumens
Efficiency: N/A
Efficacy: 84.1 lumens/watt
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.66
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 5.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P226158

CATALOG NUMBER: MRZ-1-REC-X-1-L35-97-FL-UNV-X-STD-SFL

Luminous Intensity Polar Plot

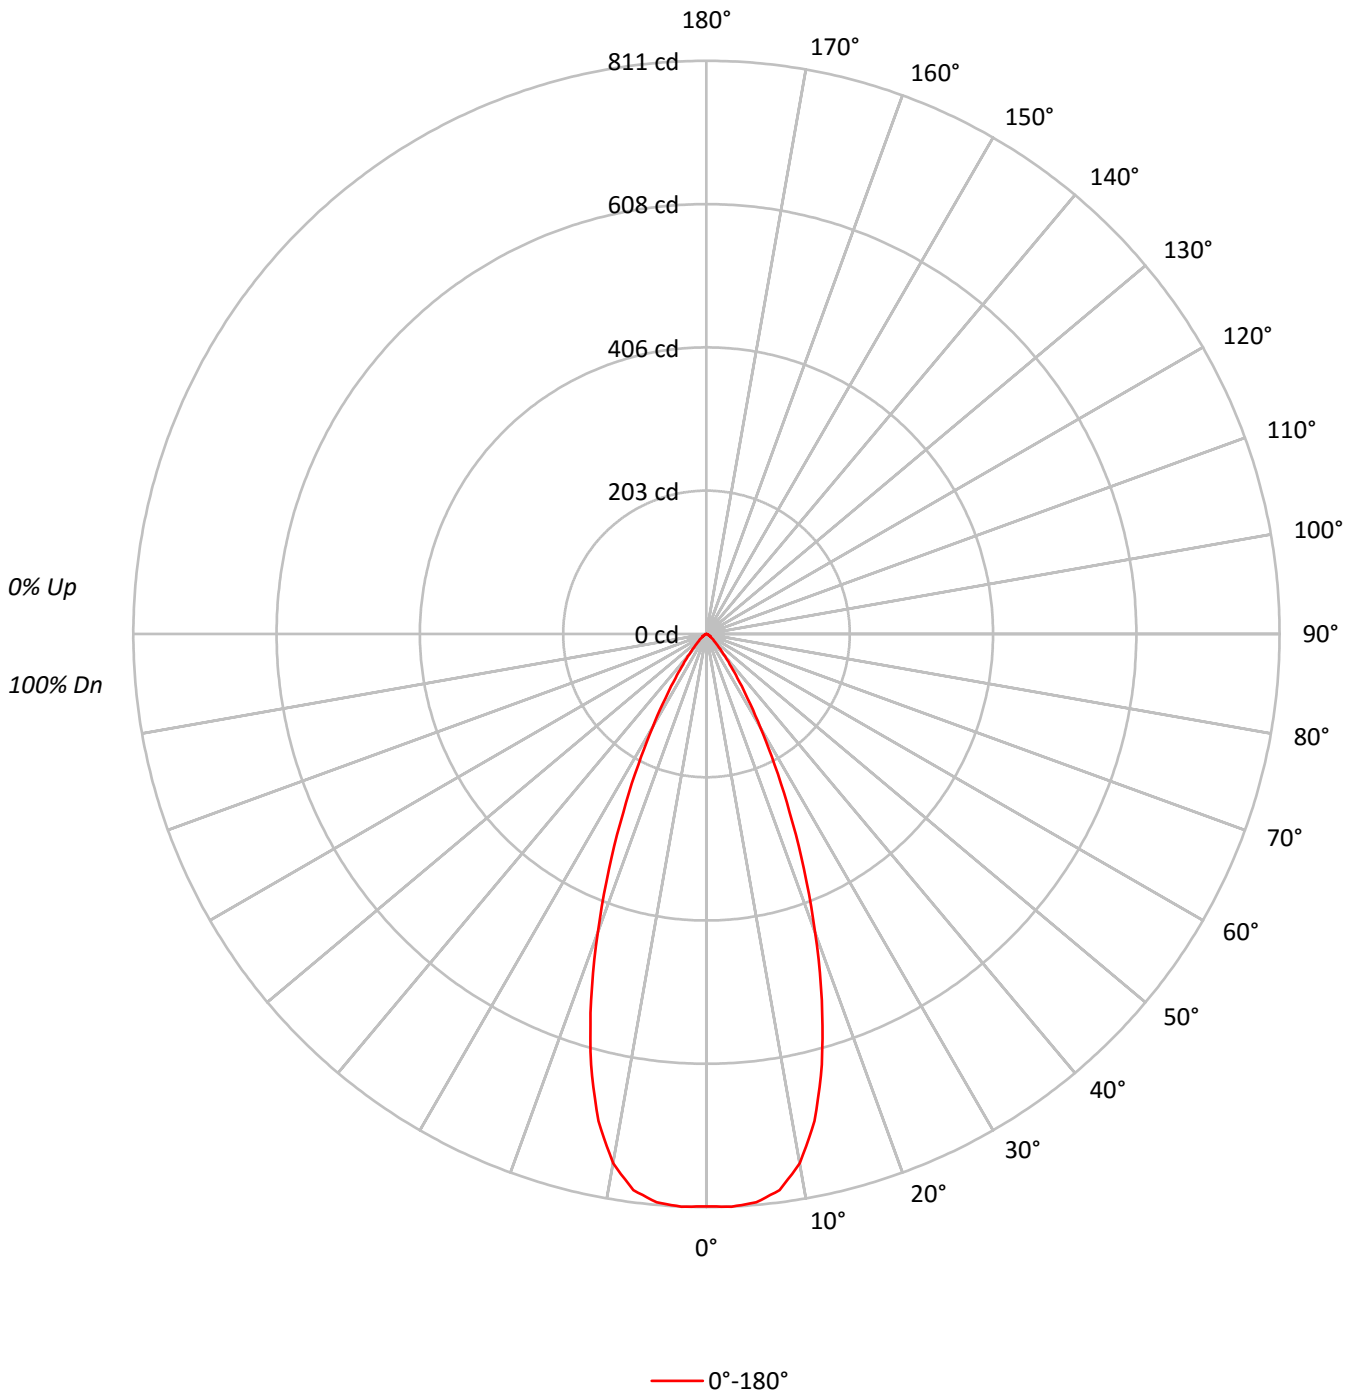



TEST NUMBER: P226158

CATALOG NUMBER: MRZ-1-REC-X-1-L35-97-FL-UNV-X-STD-SFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102	102	100	99	98	97	96	95
2	109	105	101	98	107	103	99	97	100	97	95	97	94	93	94	92	91	89
3	104	98	94	90	102	97	93	90	94	91	88	92	89	87	90	88	85	84
4	100	93	88	84	98	92	87	84	90	86	83	88	84	82	86	83	81	79
5	95	88	83	79	94	87	82	78	85	81	78	84	80	77	82	79	76	75
6	91	83	78	74	90	83	78	74	81	77	74	80	76	73	79	75	73	71
7	88	79	74	70	86	79	74	70	77	73	70	76	72	69	75	72	69	68
8	84	76	70	67	83	75	70	66	74	69	66	73	69	66	72	68	66	64
9	81	72	67	63	80	72	67	63	71	66	63	70	66	63	69	65	63	61
10	78	69	64	60	77	69	64	60	68	63	60	67	63	60	66	63	60	59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	399637
5°	399827
10°	380953
15°	322305
20°	236112
25°	151502
30°	86481
35°	46016
40°	24603
45°	14094
50°	8750
55°	6107
60°	4342
65°	3269
70°	2308
75°	2097
80°	1421
85°	0



TEST NUMBER: P226158

CATALOG NUMBER: MRZ-1-REC-X-1-L35-97-FL-UNV-X-STD-SFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	75.7	16.7
10°-20°	171.5	37.8
20°-30°	128.7	28.4
30°-40°	51.1	11.3
40°-50°	16.7	3.7
50°-60°	6.5	1.4
60°-70°	2.8	0.6
70°-80°	1.0	0.2
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
<hr/>		
0°-30°	375.9	82.8
0°-40°	427.0	94.1
0°-60°	450.1	99.2
0°-90°	453.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	453.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	810	
5°	807	76
15°	631	172
25°	278	129
35°	76	51
45°	20	17
55°	7	6
65°	3	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P226158

CATALOG NUMBER: MRZ-1-REC-X-1-L35-97-FL-UNV-X-STD-SFL

CANDELA DISTRIBUTION (FULL):

0°	
0°	810.0
2.5°	811.1
5°	807.3
7.5°	793.7
10°	760.4
12.5°	705.8
15°	631.0
17.5°	543.1
20°	449.7
22.5°	359.8
25°	278.3
27.5°	208.5
30°	151.8
32.5°	108.6
35°	76.4
37.5°	54.0
40°	38.2
42.5°	27.9
45°	20.2
47.5°	14.7
50°	11.4
52.5°	8.7
55°	7.1
57.5°	5.4
60°	4.4
62.5°	3.3
65°	2.8
67.5°	2.1
70°	1.6
72.5°	1.1
75°	1.1
77.5°	0.5
80°	0.5
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)